



PLAN VIEW

NATEC.

- EXPANSION JOINTS SHALL BE CONSTRUCTED AS SHOWN ON THE DETAILS FOR P.C.C. SIDEWALK.
- 2. THE CURB BETWEEN ADJACENT DRIVEWAYS SHALL BE FULL HEIGHT FOR A DISTANCE OF AT LEAST FOUR 4 FEET (1.2 METERS)
- 3. P.C. CONCRETE DRIVEWAYS SHALL BE CONSTRUCTED AT LOCATIONS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
- 4. 34" (20) PREFORMED EXPANSION JOINTS WILL NOT BE PAID FOR SEPARATELY BUT SHALL BE CONSIDERED INCIDENTAL TO P.C.C. DRIVEWAY PAVEMENT 8" (200).
- 5. COMBINATION CONC. CURB AND GUTTER SHALL BE MEASURED STRAIGHT ACROSS THE DRIVEWAY. NO ADDITIONAL COMPENSATION WILL BE ALLOWED FOR THE TRANSITION CURB AND GUTTER.



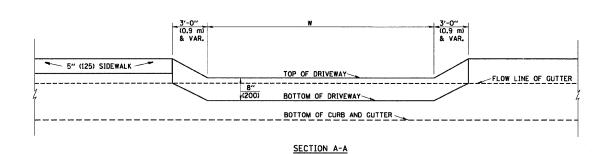

P.C.C. DRIVEWAY PAVEMENT DETAIL

ADJACENT BUILDING, RETAINING WALL OR OTHER STRUCTURE PRIVATE - R.O.W. KEYSTONE-DRIVEWAY SOD -3/4" (20) - SIDEWALK APRON RAMP SIDEWALK CURB AND GUTTER -DEPRESSED CURB FIRE HYDRANT PLATFORM THE PROPOSED CARRIAGE WALK SHALL BE CONSTRUCTED THE SAME WIDTH AND LENGTH AS THE EXISTING CARRIAGE WALK TRAFFIC SIGNAL, TROLLEY POWER DEPRESSED CURB POLE, LIGHT STANDARD OR COLUMN TO BE 3'-0" (0.9 m) SQUARE OR FOR OVERHEAD STRUCTURE. AND PAID FOR AS PORTLAND CEMENT CONCRETE SIDEWALK, 5-INCHES (125). PAVEMENT -PAVEMENT /

SIDEWALK 1" (25) PREFORMED EXPANSION JOINT FILLER


SLOPE FOR SIDEWALK 1" (25) IN 3'-0" (0.9 m) IN CHICAGO


NOTES:

- ONE-HALF INCH THICK EXPANSION JOINTS SHALL BE PLACED BETWEEN THE SIDEWALK AND ALL STRUCTURES SUCH AS LIGHT STANDARDS, TRAFFIC LIGHT STANDARDS, MANHOLES, WHICH EXTEND THROUGH THE SIDEWALK.
- 2. ¾" (20) THICK EXPANSION JOINTS SHALL BE PLACED AT INTERVALS OF NOT MORE THAN 100 FEET (30 METERS) IN THE SIDEWALK, WHERE THE SIDEWALK IS CONSTRUCTED ADJACENT-TO PAVEMENT OR CURB HAVING EXPANSION JOINTS, THE EXPANSION JOINTS IN THE SIDEWALK SHALL BE PLACED OPPOSITE THE EXISTING EXPANSION JOINTS AS NEARLY AS PRACTICABLE. EXPANSION JOINTS SHALL ALSO BE PLACED WHERE THE SIDEWALK ABUTS EXISTING SIDEWALKS, BETWEEN DRIVEWAY PAVEMENT AND SIDEWALK, AND BETWEEN SIDEWALK AND CURBS WHERE THESIDEWALK ABUTS A CURB.

PORTLAND CEMENT CONCRETE SIDEWALK DETAILS

NOTES: NO EXTRA COMPENSATION SHALL BE ALLOWED FOR THE GUTTER FLARE

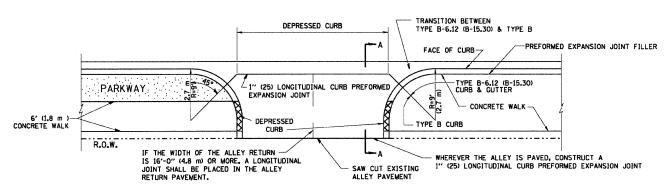

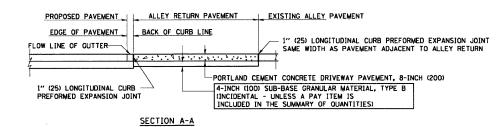

ALLEY RETURN DETAIL

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN

FILE NAME =	USER NAME = gaglianobt	DESIGNED - M. DE YONG	REVISED -		CITY OF CHICAGO		F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEET SHEETS NO.	
W:\diststd\22x34\bdl7.dgn		DRAWN -	REVISED -	STATE OF ILLINOIS				2865	2829 RS-4	соок	18 10
	PLOT SCALE = 50.0000 '/ IN.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION	DETAILS	FOR P.C. CONCRETE DRIVEWAY, ALLEY RETURN	AND SIDEWALK	BD400	02 (PD 17)	CONTRACT	NO. 60H10
	PLOT DATE = 1/4/2008	DATE - 06-13-90	REVISED -	SCA		SHEET NO. 1 OF 1 SHEETS STA.	TO STA.	FED. ROAD D		ID PROJECT	