



NOTE:


1.) FOR BIKE LANE SYMBOLS ONLY,
USE PRE-FORMED THERMOPLASTIC
WITH A MINIMUM THICKNESS OF 90 MILS,
MINIMUM SKID RESISTANCE VALUE OF 60 BPN,
& A MINIMUM INDEX OF REFRACTION OF 1.50.


2.) THE RESIDENT ENGINEER SHALL CONTACT MR. BEN GOMBERG AT 312-744-8093 AT LEAST ONE CALENDAR WEEK PRIOR TO INSTALLING BIKE LANE SYMBOLS.


TYPICAL BIKE LANE SYMBOLS

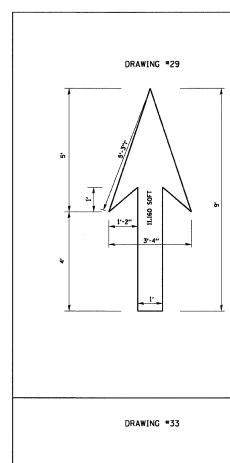


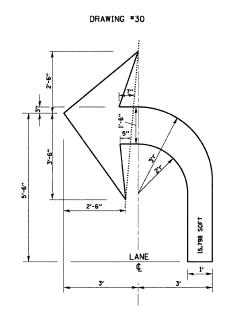


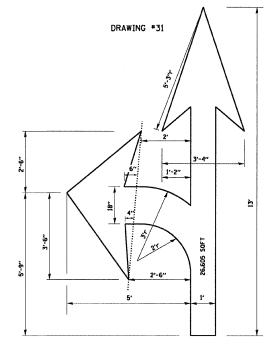

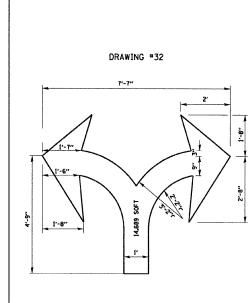

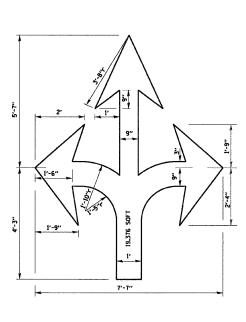

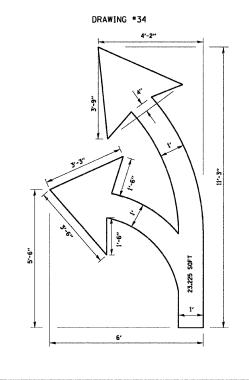

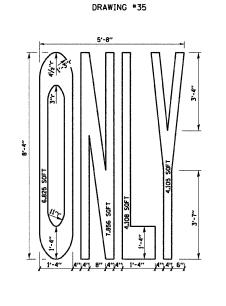

ALL MARKINGS SHALL BE SOLID WHITE UNLESS OTHERWISE NOTED IN THE PLANS

I II IOAL	DINE CONE	3 THEOLS
	DRAWING #28	
	D 20	

FILE NAME =	USER NAME = gaglianobt	DESIGNED -	REVISED -T. RAMMACHER 12-07-00
W:\d:ststd\22x34\to24.dgn		DRAWN -	REVISED -
	PLOT SCALE = 50.000 '/ IN.	CHECKED -	REVISED -
	PLOT DATE = 1/4/2008	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

CITY OF CHICAGO		F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.		
١	TYPICAL PAVEMENT MARKINGS		2865	2829 RS-4	COOK	18	18	
١	TITICAL FAVENIENT MANAINOS				TC-24	CONTRACT	NO.	60H10
	SCALE: NONE SHEET NO. 2 OF 2 SHEETS	STA.	TO STA.	FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				