



DETAIL A
(Typical Treated Timber Splices)

SPLICE LOCATED BETWEEN GUARDRAIL POSTS
treated timber splice plate 2x12 (50x300),
actual size 1 1/2x1 1/2 (40x290), 24(600) long
with 8 evenly spaced 1/2(M12) galvanized
bolts with nuts & washers.

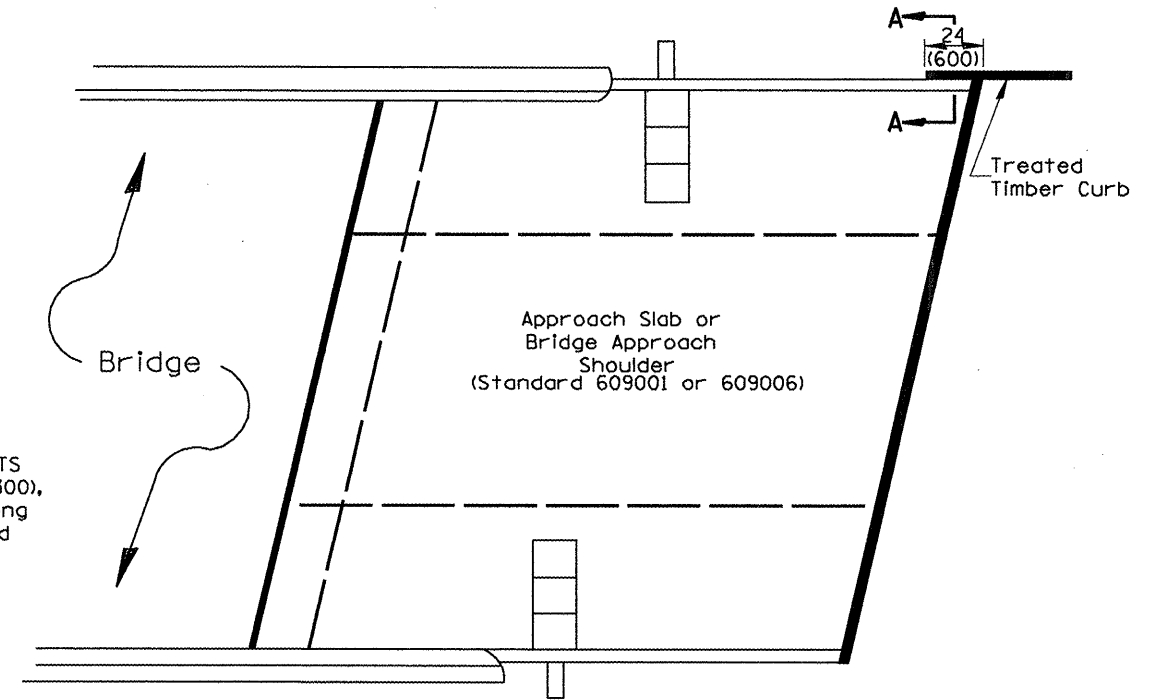


PLAN VIEW

APPROACH SLAB OR BRIDGE APPROACH SHOULDER
(STANDARD 609001 or 609006)

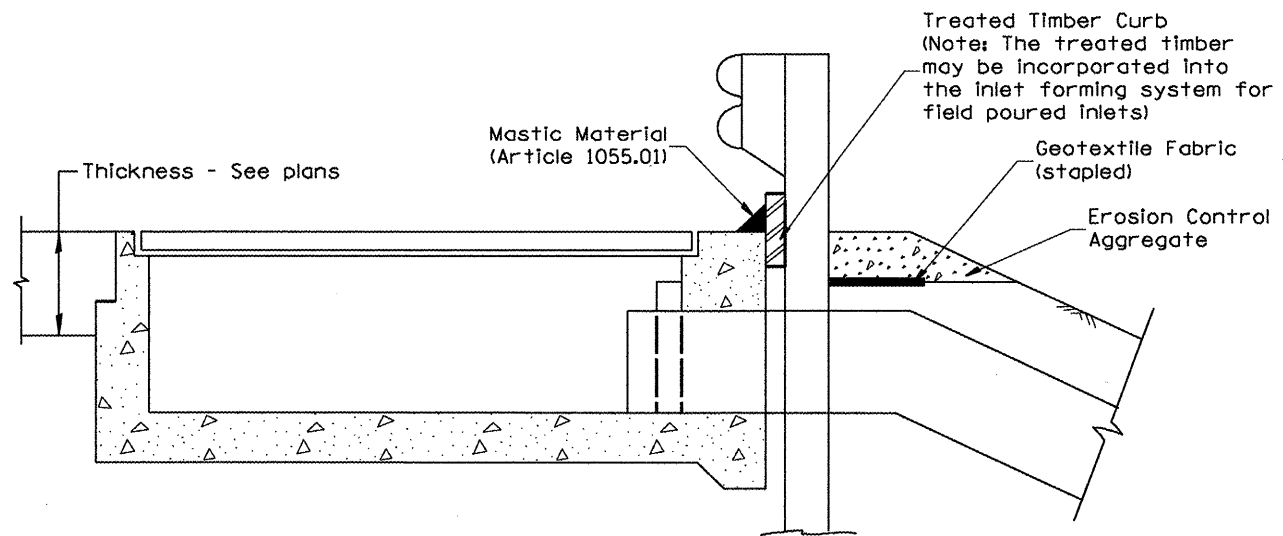

TYPICAL SECTION WITH EROSION CONTROL CURB
AT INLETS TYPE E & F (STANDARD 610001)

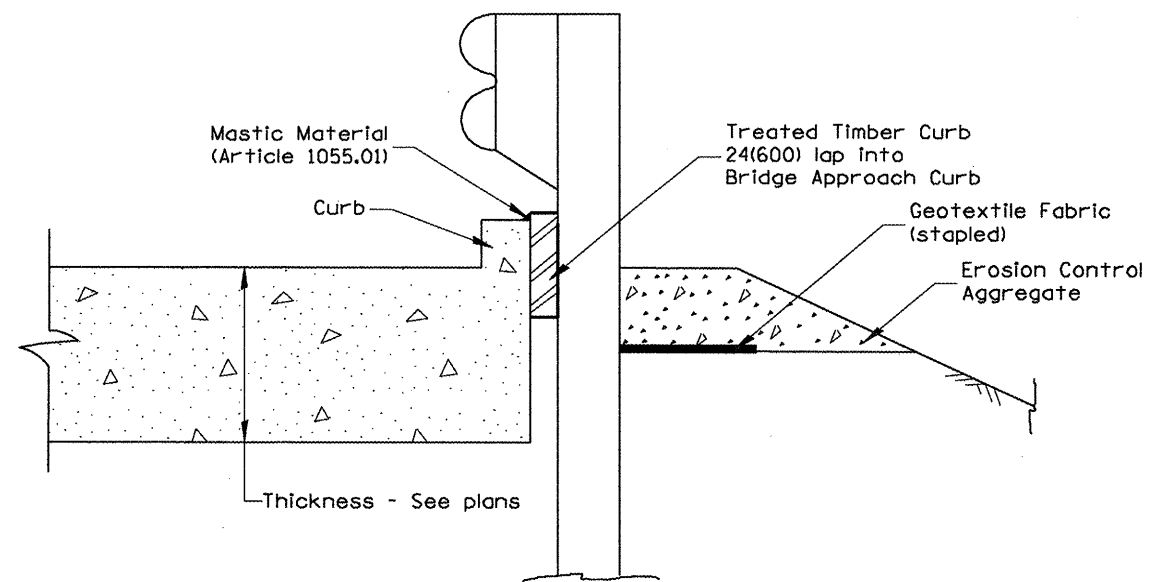

SECTION A-A
TYPICAL SECTION WITH EROSION CONTROL CURB
AT BRIDGE APPROACH CURB
(STANDARD 609001 OR 609006)

All dimensions are in inches (millimeters)
unless otherwise noted.

| | | | | | | | | | | | | | | | |
|--|--|-------------------------------------|--|---|--|---------------------|--|----------------------------------|--|---------------------------|--|--------------------|--|-----------|--|
| | | STATE OF ILLINOIS | | GUARDRAIL EROSION CONTROL TREATMENTS | | F.A.P. RTE. | | SECTION | | COUNTY | | TOTAL SHEETS | | SHEET NO. | |
| | | DEPARTMENT OF TRANSPORTATION | | NOT TO SCALE | | SHT. 2 OF 2 | | 669/693 | | TAZEWELL | | 54 | | 49 | |
| | | | | | | CADD STD. 630101-D4 | | 10.15IRS-5.9RS, 13RS-2.15RS-4 | | ILLINOIS FED. AID PROJECT | | CONTRACT NO. 68892 | | | |