

RAILROAD-HIGHWAY GRADE CROSSING

WHEN THE PAVEMENT MARKING SYMBOL IS USED, A PORTION OF THE SYMBOL SHOULD BE LOCATED DIRECTLY ADJACENT


TO THE ADVANCE WARNING SIGN (W10-1)

AS PLACED BY TABLE II-1, CONDITION B

OF THE MUTCD.

RAILROAD CROSSING WITH INTERCONNECT ONLY

RAILROAD CROSSING WITH INTERCONNECT AND PRE-SIGNALS

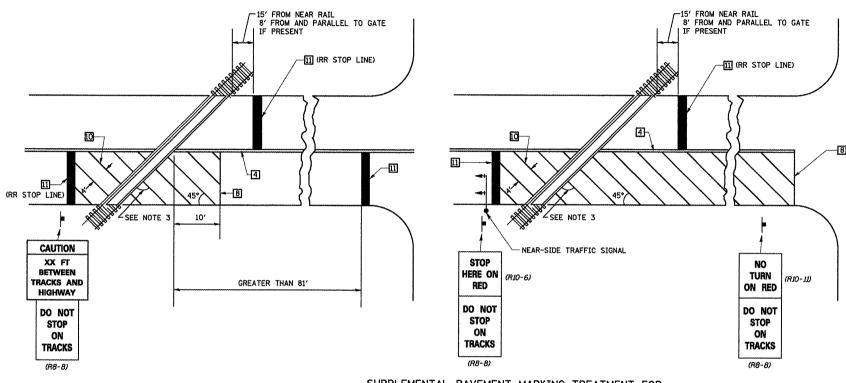

SUPPLEMENTAL PAVEMENT MARKING TREATMENT FOR RAILROAD-HIGHWAY GRADE CROSSING

8' (2.4 m) OR AS DIRECTED BY THE ENGINEER.

GENERAL NOTES

- SUPPLEMENTAL PAVEMENT MARKINGS TO BE INSTALLED ONLY ON APPROACHES TO INTERSECTIONS CONTROLLED BY TRAFFIC SIGNALS WHICH ARE INTERCONNECTED WITH THE RAILROAD WARNING SIGNALS.
- 2. EXTEND PAVEMENT MARKINGS TO THE INTERSECTION ONLY WHERE NEAR-SIDE TRAFFIC SIGNALS ARE USED.
- 3. WHERE THE ANGLE BETWEEN THE DIAGONAL PAVEMENT MARKINGS AND THE TRACK WOULD BE LESS THAN 20°, THE PAVEMENT MARKINGS SHOULD BE PLACED IN THE OPPOSITE DIRECTION FROM THAT SHOWN.

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

							DISTRICT 5 DETAIL NO. 7800AAAA			
FILE NAME =	USER NAME = craigre	DESIGNED -	REVISED ~ 11/06			DAUFATER BEADING AND BEADINGS	F.A.S.	SECTION	COUNTY	TOTAL SHEET
ct\pw_work\pwidot\craigre\d0112235\05705	ll-sht-details.dgn	DRAWN ~	REVISED -	STATE OF ILLINOIS		PAVEMENT MARKING AND MARKERS	WIE.	******************************		SHEETS NO.
	PLOT SCALE = 40.0000 '/ IN.	CHECKED ~	REVISED -	DEPARTMENT OF TRANSPORTATION	(RURAL & URBAN APPLICATIONS)		1476	65,56)RS-3	McLean CONTRACT	NO. 70511
	PLOT DATE ≈ 1/29/2009	DATE -	REVISED ~		SCALE	SHEET NO. 4 OF 4 SHEETS STA. TO STA.	FED. ROAD DIST. NO			MO' 10211