

## NOTES

Detail I - With Bar Splicer or Couplers:

Connect one (1) I'' x 7' 'x ''W'' steel 1 to the top layer of couplers with 2-58'' \$\phi\$ bolts screwed to coupler at approximate \$\mathbb{C}\$ of each barrier panel.

Detail II - With Extended Reinforcement Bars:

Connect one (1) 1" x 7" x "W" steel 12 to the concrete slab or concrete wearing surface with 2-58" \$\phi\$

Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate \$\mathbb{Q}\$ of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier.

The 1" x 7" x "W" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

## SECTIONS THRU SLAB OR DECK BEAM

- \*\*\* Dimension shown is minimum required embedment into concrete.

  If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.
- \*\*\*\* If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.


Extended #5 bars


 $2^{-5}8'' \phi$  Expansion Anchors or

cast in place inserts with a

certified min. proof load of

5,000 Lbs.

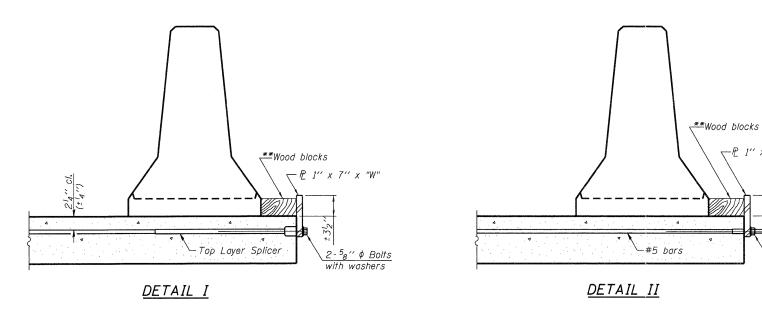

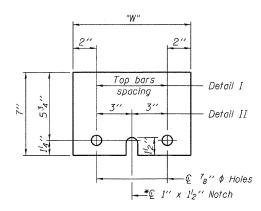

STEEL RETAINER P 1" x 7" x "W"

\* Required only with Detail II

\*\* Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"

R-27

7-1-10

USER NAME	=	dheberling	DESIGNED	-	BRD	REVISED	-	П	ll v	XXY IL
FILE NAME	=	Ø430004&5-64094.dq	∩CHECKED	-	SDS	REVISED	-	Ш		$W\mathbb{H}$
PLOT DATE	=	12/6/2011	DRAWN	-	DLH	REVISED	-	#	#	
PLOT TIME	=	10:06:42 AM	CHECKED	-	BRD/SDS	REVISED	-	E	N	GIN

 WHKS & co.
 7018 KINGSMILL CT.,

 SPRINGFIELD, IL
 (217) 483-9457

 NGINEERING
 DESIGN FIRM #184001036

7018 KINGSMILL CT.,
SPRINGFIELD, IL
(217) 483-9457
DEPARTMENT OF TRANSPORTATION

TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION
STRUCTURE NO. 043-0004 & 043-0005

SHEET NO. 5 OF 27 SHEETS

.A.P.		SEC	TION	COUNTY	TOTAL SHEETS	SHEET NO.					
301	(43B,	44B,	44HB,	45B)D		JO DAVIESS	309	118			
						CONTRACT	NO. 6	4C94			
ILLINOIS FED. AID PROJECT											
	TE.	TE.	TE. SEC	301 (43B, 44B, 44HB,	SECTION 301 (43B, 44B, 44HB, 45B)D	TE. SECTION 301 (43B, 44B, 44HB, 45B)D	TE. SECTION COUNTY 301 (43B, 44B, 44HB, 45B)D JO DAVIESS CONTRACT	TE. SECTION COUNTY SHEETS 301 (43B, 44B, 44HB, 45B)D JO DAVIESS 309 CONTRACT NO. 6			