
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

EXISTING DECK BEAM

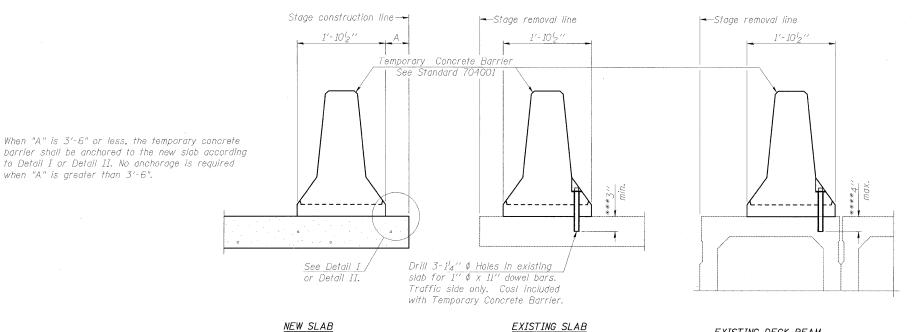

NOTES


Detail I - With Bar Splicer or Couplers: Connect one (1) 1''x7''x10'' steel $/\!\!\!\! L$ to the top layer of couplers with $2^{-\frac{5}{8}}$ " ϕ bolts screwed to coupler at approximate © of each barrier panel.


Detail II - With Extended Reinforcement Bars: Connect one (1) 1"x7"x 10" steel ₽ to the concrete slab or concrete wearing surface with $2^{-5}8''$ ϕ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate @ of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier. The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready

SECTIONS THRU SLAB OR DECK BEAM

- *** Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.
- **** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

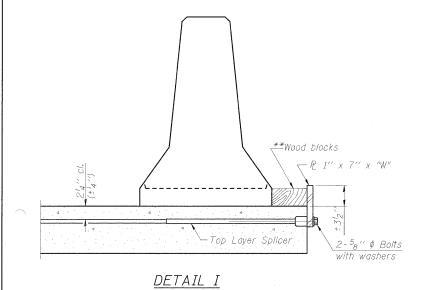

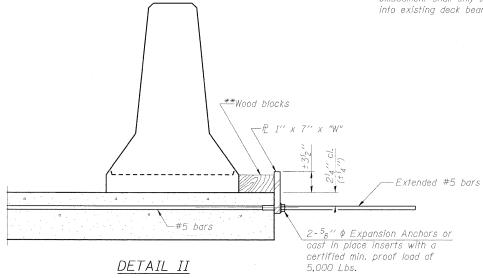

Top bars - Detail I spacina - Detail II **-**-- € ⁷8'' ¢ Holes *@ 1" x 12" Notch

STEEL RETAINER P 1" x 7" x 10"

* Required only with Detail II

TEMPORARY CONCRETE BARRIER STRUCTURE NO. 016-2503

	SHEET NO.S4	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEE NO.
	,	353	11-5-B	COOK	39	16
	S18 SHEETS			CONTRACT	NO. 60	J44
ILLINOIS FED. AID PRO				ID PROJECT		

** Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"

DESIGNED JPM CHECKED TG DRAWN MPS CHECKED JPM, TG

R-27

11-1-09