
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

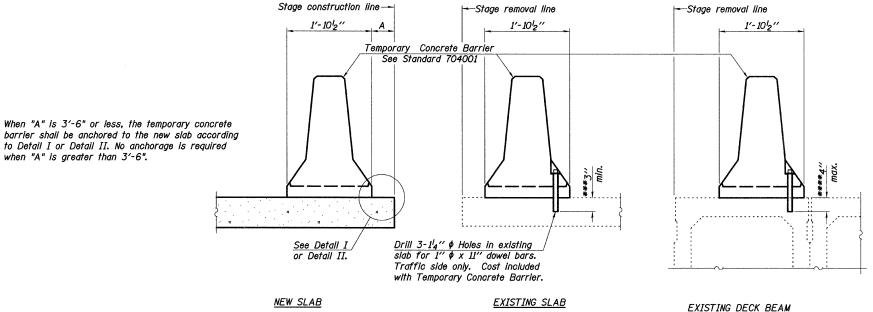


NOTES

Detail I - With Bar Splicer or Couplers: Connect one (1) 1"x7"x10" steel P to the top layer of couplers with $2^{-5}8''$ ϕ bolts screwed to coupler at approximate $\mathbb C$ of each barrier panel.

Detall II - With Extended Reinforcement Bars:
Connect one (1) 1"x7"x 10" steel € to the concrete slab or concrete wearing surface with 2-58" \$\phi\$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate € of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier.
The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

SECTIONS THRU SLAB OR DECK BEAM

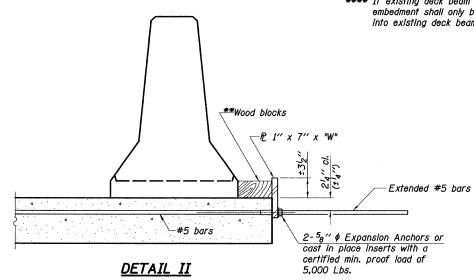

*** Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.

**** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

Baker

STEEL RETAINER P 1" x 7" x 10"

"W"

Top bars

spacing

Detail I

Detail II

−@ ⁷8″ ¢ Holes

*@ 1" x 1'2" Notch

* Required only with Detail II

TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION I-57 OVER ROCK CREEK F.A.I. RTE. 57 - SEC. (46-1,2)RS-3&I KANKAKEE COUNTY STA. 549+60.00 S.N. 046-0018 & S.N. 046-0019

TOTAL SHEET SHEETS NO. F.A.I. RTE. SECTION COUNTY SHEET NO. S3 57 (46-1,2)RS-3&I KANKAKEE 115 28 S27 SHEETS CONTRACT NO. 66608 FED. ROAD DIST. NO. 7 | ILLINOIS | FED. AID PROJECT

** Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"

DESIGNED: GWG
CHECKED: KPZ
DRAWN DRAWN: MAM CHECKED: KPZ

R-27

when "A" is greater than 3'-6".

11-1-09

-Top Layer Splicer

DETAIL I

**Wood blocks

- 12 1" x 7" x "W"

2-58" \$ Bolts