
## STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

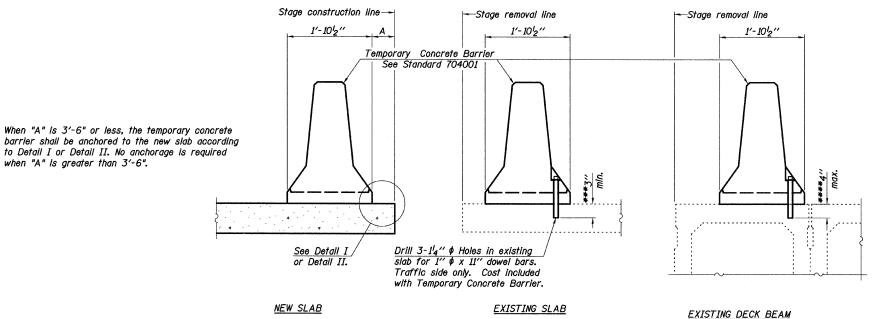

## **NOTES**


Detail I - With Bar Splicer or Couplers:
Connect one (1) 1"x7"x10" steel ft to the top layer of couplers with 2-58" \$\phi\$ bolts screwed to coupler at approximate & of each barrier panel.


Detail II - With Extended Reinforcement Bars: Connect one (1) 1"x7"x 10" steel 12 to the concrete slab or concrete wearing surface with 2-58" \$\phi\$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate & of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier. The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready

## SECTIONS THRU SLAB OR DECK BEAM

- \*\*\* Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.
- \*\*\*\* If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

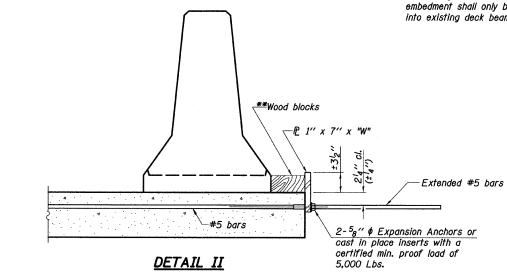



STEEL RETAINER P 1" x 7" x 10"

\* Required only with Detail II

TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION LAKE MANTENO RD. OVER I-57 F.A.I. RTE. 57 - SEC. (46-1,2)RS-3&I KANKAKEE COUNTY STA. 697+99.50 S.N. 046-0084

TOTAL SHEET SHEETS NO. F.A.I. RTE. SECTION COUNTY SHEET NO. S18 (46-1,2)RS-3&I KANKAKEE 115 43 S27 SHEETS CONTRACT NO. 66608 FED. ROAD DIST. NO. 7 ILLINOIS FED. AID PROJECT

\*\* Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"

DESIGNED: GWG DESIGNED: 6W0
CHECKED: KPZ
DRAWN: MAM
CHECKED: KPZ

R-27 11-1-09

DETAIL I

\*\*Wood blocks

Top Layer Splicer

- P\_ 1" x 7" x "W"

2-5<sub>8</sub>" ø Bolts

Baker