STANDARD BAR SPLICER ASSEMBLY

| Minimum Lap Lengths | | | | | | |
|---------------------------|---------|---------|---------|---------|--|--|
| Bar size to be spliced | Table 1 | Table 2 | Table 3 | Table 4 | | |
| 3, 4 | 1'-5'' | 1'-11'' | 2'-1'' | 2'-4" | | |
| 5 | 1'-9'' | 2'-5'' | 2'-7'' | 2'-11'' | | |
| 6 | 2'-1'' | 2'-11'' | 3'-1'' | 3'-6" | | |
| 7 | 2'-9'' | 3′-10′′ | 4'-2" | 4'-8'' | | |
| 8 | 3′-8′′ | 5′-1′′ | 5′-5′′ | 6'-2" | | |
| 9 | 4'-7'' | 6′-5′′ | 6′-10′′ | 7′-9′′ | | |

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C

Table 3: Epoxy bar, 0.8 Class C

Table 4: Epoxy bar, Top bar lap, 0.8 Class C

Threaded splicer bar length = min. lap length + 1_2^{l} " + thread length


* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.

| l ocation | Bar | No. assemblies | Table for minimum |
|-------------------|------|-------------------|-------------------|
| LUCUITUIT | size | required | lap length |
| Exp. Jts. (Deck) | #6 | 20 (EB) & 20 (WB) | 3 |
| Exp. Jts. (Abut.) | #6 | 8 (EB) & 8 (WB) | 3 |
| | | | |
| | | | |
| | | | |


Reinforcement Bars Threaded couplers (E) Threaded splicer bar (E) Threaded splicer bar (E) 4'-0" Bridge Deck Approach Slab Threaded splicer bar (E)

BAR SPLICER ASSEMBLY FOR #5 BAR ON INTEGRAL OR SEMI-INTEGRAL ABUTMENTS

No. required =

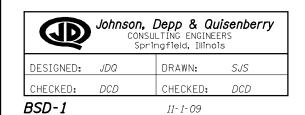


STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

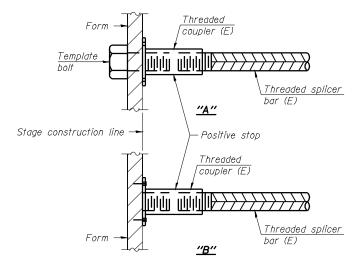


INSTALLATION AND SETTING METHODS

"A": Set bar splicer assembly by means of a template bolt.
"B": Set bar splicer assembly by nalling to wood forms or cementing to steel forms.

(E): Indicates epoxy coating.

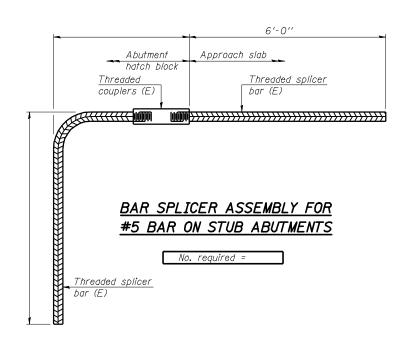



STANDARD MECHANICAL SPLICER

| Location | Bar size | No. assemblies required |
|----------|-------------|----------------------------|
| | | |
| | | |
| | | |
| | | |
| | | |

NOTES

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars.

Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications.

See special provision for Mechanical Splicers.

See approved list of bar splicer assemblies and mechanical splicers for lternatives.

BAR SPLICER ASSEMBLY AND MECHANICAL SPLICER DETAILS STRUCTURE NO. 086-0023(EB) & 0024(WB)