

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
322	(24B)B-1	FAYETTE	22	7
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		

teasleyck
 12/22/2005
 c:\projects\94778\d04899pa.dgn
 TYP

GUARDRAIL SCHEDULE


LOCATION	STEEL PLATE BEAM GUARDRAIL, TYPE A FOOT	REMOVE AND RE-ERECT TRAFFIC BARRIER TERMINAL EACH	GUARDRAIL MARKERS, TYPE A EACH	STEEL PLATE BEAM GUARDRAIL ATTACHED TO STRUCTURE FOOT
STAGE I NE CORNER	100	1	4	
SE CORNER OVER STRUCTURE	163	1		43.75
STAGE II NW CORNER	163	1	4	
SW CORNER OVER STRUCTURE	100	1		43.75
TOTAL	526	4	8	87.5

SEEDING SCHEDULE

SEEDING CLASS 2	0.1 ACRES
NITROGEN FERTILIZER	9 LBS
PHOSPHORUS FERTILIZER NUTRIENT	9 LBS
POTASSIUM FERTILIZER NUTRIENT	9 LBS
AGRICULTURAL GROUND LIMESTONE	0.2 TONS
MULCH METHOD 2	0.1 ACRES
TEMPORARY EROSION CONTROL SEEDING	10 POUND

AGGREGATE DITCH CHECK

OFFSET	STATION	QUANTITY
50' RT	443+25	1 EACH

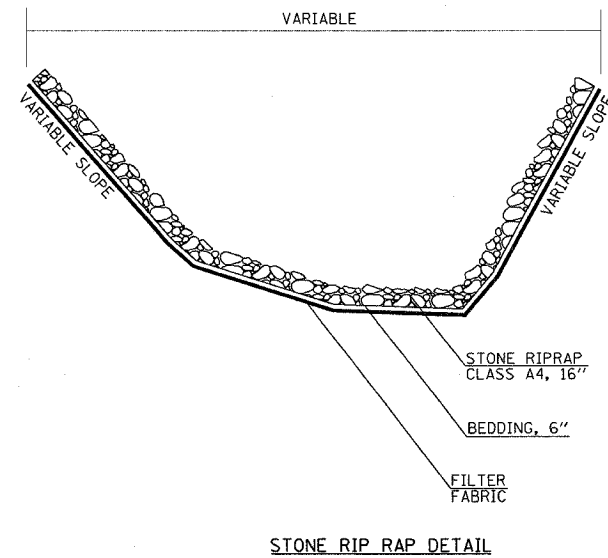

STONE RIPRAP, CLASS A4

Station to	Station	SQ YD
444+30	444+50	112
444+50	445+00	226
445+00	445+50	222
445+50	446+25	329
TOTAL		889

FILTER FABRIC FOR RIPRAP

Station to	Station	SQ YD
444+30	444+50	112
444+50	445+00	226
445+00	445+50	222
445+50	446+25	329
TOTAL		889

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
SCHEDULE OF QUANTITIES & RIPRAP DETAIL
 SCALE: VERT. DATE
 HORIZ. DATE
 DRAWN BY
 CHECKED BY

PLOT DATE = 12/22/2005
 FILE NAME = c:\projects\94778\d04899pa.dgn
 PLOT SCALE = 28.0000 / IN.
 USER NAME = teasleyck