



TYPICAL CROSSWALK MARKING




4' (1.2 m) WIDE MEDIANS ONLY




DIAGONAL LINE SPACING: 50' (15 m) C-C (LESS THAN 30MPH (50 km/h))
75' (25 m) C-C 30MPH (50 km/h) T0 45MPH (70 km/h))
150' (45 m) C-C (MORE THAN 45MPH (70 km/h))

MEDIANS OVER 4' (1.2 m) WIDE

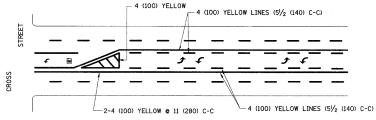


A MINIMUM OF TWO PAIRS OF TURN ARROWS SHALL BE USED, WHITE IN COLOR, ADDITIONAL PAIRS SHALL BE PLACED AT 200' (60 m) TO 300' (90 m) INTERVALS.



MEDIAN WITH TWO-WAY LEFT TURN LANE

TYPICAL PAINTED MEDIAN MARKING




FULL SIZE LETTERS 8' (2.4 m) AND ARROWS SHALL BE USED. \P AREA = 15.6 SQ. FT. (1.5 m²) \P AREA = 20.8 SQ. FT. (1.9 m²)

* TURN LANES IN EXCESS OF 400' (120 m) IN LENGTH MAY HAVE AN ADDITIONAL SET OF ARROW - "ONLY" INSTALLED MIDWAY BETWEEN THE OTHER TWO SETS OF ARROW - "ONLY".

TYPICAL LEFT (OR RIGHT) TURN LANE

TYPICAL TURN LANE MARKING



TYPICAL ISLAND MARKING

TYPE OF MARKING	WIDTH OF LINE	PATTERN	COLOR	SPACING / REMARKS			
CENTERLINE ON 2 LANE PAVEMENT	4 (100)	SKIP-DASH	YELLOW	10' (3 m) LINE WITH 30' (9 m) SPACE			
CENTERLINE ON MULTI-LANE UNDIVEDED PAVEMENT	2 @ 4 (100)	SOLID YELLOW 5 SOLID YELLOW 1		11 (280) C-C			
NO PASSING ZONE LINES: FOR ONE DIRECTION FOR BOTH DIRECTIONS	4 (100) 2 & 4 (100)			5½ (140) C-C FROM SKIP-DASH CENTERLINE 11 (280) C-C OMIT SKIP-DASH CENTERLINE BETWEEN			
LANE LINES	4 (100) 5 (125) ON FREEWAYS	SKIP-DASH SKIP-DASH	WHITE WHITE	10' (3 m) LINE WITH 30' (9 m) SPACE			
DOTTED LINES (EXTENSIONS OF CENTER, LANE OR TURN LANE MARKINGS)	IONS OF CENTER, LANE OR EXTENDED EXTENDED		SAME AS LINE BEING EXTENDED	NG 2' (600) LINE WITH 6' (1.8 m) SPACE			
EDGE LINES	LINES 4 (100) SOLID YELLOW-LEFT WHITE-RIGHT		YELLOW-LEFT WHITE-RIGHT	OUTLINE MOUNTABLE MEDIANS IN YELLOW: EDGE LINES ARE NOT USED NEXT TO BARRIER CURB			
TURN LANE MARKINGS	INE MARKINGS 6 (150) LINE; FULL SIZE LETTERS & SYMBOLS (8' (2.4m))		WHITE	SEE TYPICAL TURN LANE MARKING DETAIL			
TWO WAY LEFT TURN MARKING	2 & 4 (100) EACH DIRECTION	SKIP-DASH AND SOLID	YELLOW	10' (3 m) LINE WITH 30' (9 m) SPACE FOR SKIP-DASH; 5½ (140) C-C BETWEEN SOLID LINE AND SKIP-DASH LINE			
	8' (2.4m) LEFT ARROW	IN PAIRS	WHITE	SEE TYPICAL TWO-WAY LEFT TURN MARKING DETAIL			
CROSSWALK LINES (PEDESTRIAN) A. DIAGONALS (BIKE & EQUESTRIAN) B. LONGITUDINAL BARS (SCHOOL)	2 & 6 (150) 12 (300) & 45° 12 (300) & 90°	SOLID SOLID SOLID	WHITE WHITE WHITE	NOT LESS THAN 6' (1.8 m) APART 2' (600) APART 2' (600) APART SEE TYPICAL CROSSWALK MARKING DETAILS.			
STOP LINES	24 (600)	SOLID	WHITE	PLACE 4' (1,2 m) IN ADVANCE OF AND PARALLEL TO CROSSWALK, IF PRESENT. OTHERWISE, PLACE AT DESIRED STOPPING POINT. PARALLEL TO CROSSROAD CENTERLINE, WHERE POSSIBLE			
PAINTED MEDIANS	2 & 4 (100) WITH 12 (300) DIAGONALS & 45° NO DIAGONALS USED FOR 4' (1,2 m) WIDE MEDIANS	SOLID	YELLOW: TWO WAY TRAFFIC WHITE: ONE WAY TRAFFIC	11 (280) C-C FOR THE DOUBLE LINE SEE TYPICAL PAINTED MEDIAN MARKING.			
GORE MARKING AND CHANNELIZING LINES	8 (200) WITH 12 (300) DIAGONALS @ 45°	SOLID	WHITE	DIAGONALS: 15' (4.5 m) C-C (LESS THAN 30MPH (50 km/h)) 20' (6 m) C-C 30MPH (50 km/h) TO 45MPH (70 km/h)) 30' (9 m) C-C (OVER 45MPH (70 km/h))			
RAILROAD CROSSING	24 (600) TRANSVERSE LINES; "RR" IS 6' (1.8 m) LETTERS; 16 (400) LINE FOR "X"	SOLID	WHITE	SEE STATE STANDARD 780001 AREA OF: "R"=3.6 SQ. FT. (0.33 m²) EACH "X"=54.0 SQ. FT. (5.0 m²)			
SHOULDER DIAGONALS	12 (300) c 45°	SOLID	WHITE - RIGHT YELLOW - LEFT	50' (15 m) C-C (LESS THAN 30MPH (50 km/h)) 75' (25 m) C-C (30 MPH (50 km/h) TO 45MPH (70 km/h). 150' (45 m) C-C (OVER 45MPH (70 km/h))			

FOR FURTHER DETAILS ON PAVEMENT MARKING REFER TO STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND STATE STANDARD 780001.

All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = nguyensm	DESIGNED -	-	EVERS	REVISED	-T.	RAMMACHER 10-27-94
c:\pw_work\pwidot\nguyensm\d0l17709\Dist	Btd.dgn	DRAWN -	-		REVISED	-A.	HOUSEH 10-09-96
	PLOT SCALE = 50.0000 '/ IN.	CHECKED -	-		REVISED	- A.	HOUSEH 10-17-96
	PLOT DATE = 3/19/2009	DATE -	-	03-19-90	REVISED	-T.	RAMMACHER 01-06-00

STATE	OF	: ILLINOIS
DEPARTMENT	OF	TRANSPORTATION

	DISTRICT ONE TYPICAL PAVEMENT MARKINGS						F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.				
							353/ 876	2009-033 TS	СООК	49	48				
									TC-13	NO. 6	0G40				
	SCALE: NONE	SHEET	NO. 1	OF	1	SHEETS	STA.	TO STA.	FED. R	FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT					