




CONTRACT NO. 62716

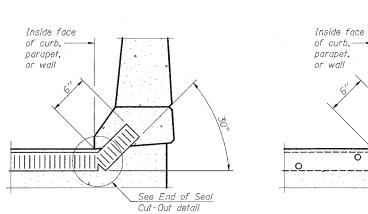



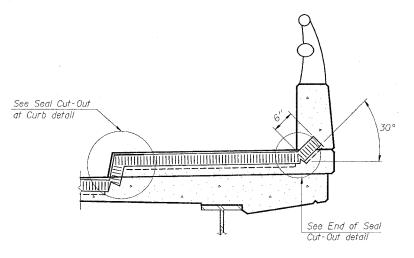


AT CURB, PARAPET, OR WALL (Showing seal)


AT CURB, PARAPET, OR WALL (Showing plate)


AT SIDEWALK OR MEDIAN

(Showing plate and seal)

## TYPICAL END TREATMENTS







PREFORMED JOINT SEAL

END OF SEAL CUT-OUT

SEAL CUT-OUT AT CURB

## HOT POURED JOINT SEALER PREFORMED FLEXIBLE FOAM FILLER 4" X 15"

PAVEMENT EXPANSION JOINT REPAIR 55TH ST AT I-294 & 55TH ST AT FLAGG CREEK

## BILL OF MATERIAL

ITEM	DESCRIPTION	UNIT	QTY	LOCATION
Removal & Replacement of Preformed Elastomeric Compression Joint Seal	Preformed Joint Seal 212"	Foot	73	55th St. at Flagg Creek
	Preformed Joint Seal 4"	Foot	73	
Expansion Joint Repair	Hot Poured Joint Sealer	Foot	120	55th St. at I-294 &
	Preformed Flexiable Foam Filler 4" X 15"		120	55th St. at Flagg Creek

(Sheet 1 of 2)

ILLINOIS DEPARTMENT OF TRANSPORTATION

PREFORMED JOINT SEAL & EXPANSION JOINT DETAIL

55TH ST. SN 016-2610, SN 016-1032

SCALE: NONE

**EJ-BJS** 9-01-03

09/16/2004

DRAWN BY S.E.S. CHECKED BY