



NOTE: CONCRETE SHALL CONTAIN 6"x6" WOVEN WIRE MESH AT LOCATIONS WHERE SIDEWALK CROSSES ALLEYS AND DRIVEWAYS

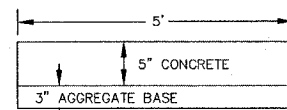


SIDEWALK DETAIL
NOT TO SCALE

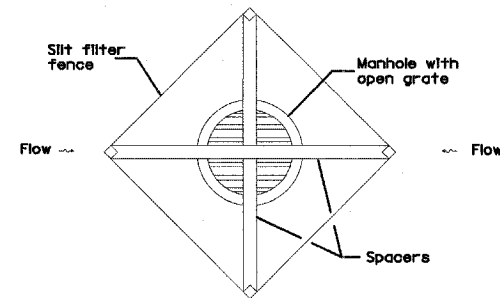

INLET PROTECTION

- NOTES:
1. ALL CURBS AND SIDEWALKS SHALL BE CONSTRUCTED WITH IDOT CLASS "SI" CONCRETE WITH A MINIMUM COMPRESSIVE STRENGTH OF 3,500 PSI AT 14 DAYS.
 2. PARKWAYS SHALL BE FINISHED WITH A MINIMUM OF SIX INCHES OF TOPSOIL AND SOD.
 3. TESTING OF SUBGRADE AND ALL ROADWAY MATERIALS SHALL BE DONE IN ACCORDANCE WITH THE SPECIFICATIONS.

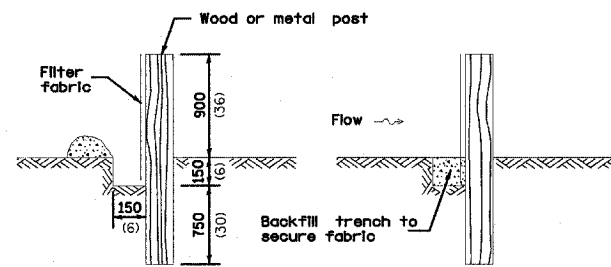

SILT FILTER FENCE AS A PERIMETER EROSION BARRIER

REVISIONS	
1	8
2	7
3	8
4	9
5	10

PREPARED BY:

ROGINA
 & ASSOCIATES, LTD.
 ENGINEERS • SURVEYORS • PLANNERS
 99 Caterpillar Drive • Joliet, Illinois • 815/729-0777 • FAX 815/729-0782

CLIENT:
CITY OF WILMINGTON

PROJECT:
**KANKAKEE STREET WIDENING
 WILMINGTON, ILLINOIS**

PROJECT NO: 101.000481	DESIGNED BY: A.B.
DATE: 12/15/08	DRAWN BY: B.J.R.
SCALE: NONE	CHECKED BY: R.A.R.

CONSTRUCTION DETAILS