CONTRACT NO. 64647

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
595	1-3-R	ROCK ISLAND	476	233
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

NOTE:
TWO WEEKS PIROR TO THE INSTALLATION OF REGULATORY SIGNING
KURT GLAZIER OF THE ILLINOIS DEPARTMENT OF TRANSPORATION
AT 815-284-5478 FOR STAKING OF THE SIGN PLACEMENT.

TYPE I REGULATORY

CODE	SIZE	DESCRIPTION	QTY	SQ FT	TOTAL SQ FT
W3-3	36X36	SIGNAL AHEAD SYMBOL	3	9	27
R4-7	24X30	KEEP RIGHT	1	5	5
R5-1	36X36	DO NOT ENTER	2	9	18
R6-1L	36X12	ONE WAY	1	3	3
W-SPC	36X36	NO OUTLET	1	9	9
R1-1	30X30	STOP	6	6.25	37.5
					99.5

TYPE II REGULATORY

CODE	SIZE	DESCRIPTION	QTY	SQ FT	TOTAL SQ FT
R2-1	36X48	SPEED LIMIT	3	12	36
W13-3	48X60	RAMP SPEED	3	20	60
W4-1R	48X48	MERGE RIGHT	1	16	16
W4-3R	48X48	MERGING RIGHT	1	16	16
W3-3	48X48	SIGNAL AHEAD SYMBOL	2	16	32
					160



1.5" Radius, 0.8" Border, 0.3" Indent, White on Green;
[BLACKHAWK RD] D;
Table of letter and object lefts.

B	L	A	C	K	H	A	W	K	R	D
4.7	10.2	14.2	20.3	25.5	30.8	35.9	41.3	47.7	57.5	63.2

MASTARM MOUNTED



1.5" Radius, 0.8" Border, 0.3" Indent, White on Green;
[VALLEY VIEW DR] D 70% spacing;
Table of letter and object lefts.

V	A	L	L	E	Y	V	V	E	W	D	R
2.9	7.6	13.4	17.5	22.3	28.4	37.5	42.8	44.7	48.9	60.1	65.2

MASTARM MOUNTED

1.5" Radius, 0.8" Border, 0.3" Indent, White on Green;
[44TH STREET] D;
Table of letter and object lefts.

4	4	T	H	S	T	R	E	E	T
3.1	7.9	13.8	18.8	28.6	33.6	38.6	44.0	48.8	53.2

MASTARM MOUNTED

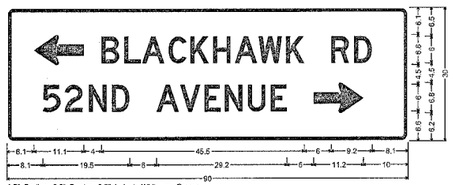

1.5" Radius, 0.8" Border, 0.3" Indent, White on Green;
Standard Arrow Custom 11.1" X 6.8" 180°; [BLACKHAWK RD] D 80% spacing;
[52ND AVENUE] D 80% spacing; Standard Arrow Custom 11.1" X 6.8" 0°;
Table of letter and object lefts.

← B	L	A	C	K	H	A	W	K	R	D
6.1	21.2	26.4	30.5	36.3	41.2	46.2	51.1	56.5	62.6	72.7	77.9
5	2	N	D	A	V	E	N	U	E	→
8.1	13.0	18.4	23.6	33.9	38.9	44.3	48.9	54.0	59.2	69.8	

MASTARM MOUNTED

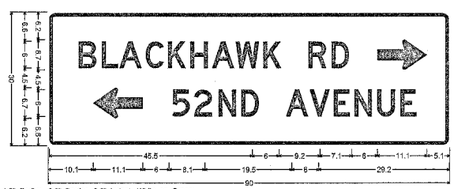

1.5" Radius, 0.8" Border, 0.3" Indent, White on Green;
Standard Arrow Custom 11.1" X 6.8" 180°; [BLACKHAWK RD] D 80% spacing;
[52ND AVENUE] D 80% spacing; Standard Arrow Custom 11.1" X 6.8" 0°;
Table of letter and object lefts.

← B	L	A	C	K	H	A	W	K	R	D
5.1	22.2	27.4	31.3	37.2	42.2	47.2	52.1	57.4	63.6	73.7	78.9
5	2	N	D	A	V	E	N	U	E	→
5.1	13.0	18.4	23.6	33.6	38.9	44.3	48.8	54.0	59.2	68.8	

MASTARM MOUNTED



6.0" Radius, 1.5" Border, 0.3" Indent, White on Green;
[Rock] E Mod 76% spacing; [River] E Mod 75% spacing;
Table of letter and object lefts.

R	o	c	k
7.4	17.3	25.6	34.2
R	i	v	e	r
5.5	15.0	20.0	28.9	37.6

2 TYPE 2 SIGN PANELS 12 SQ FT EACH
- MOUNTED ON TUBAL STEEL
STA 363+50 NB
STA 383+00 SB

MASTARM MOUNTED TYPE I SIGNS

STREE NAME	QTY	SQ FT	TOTAL SQ FT
VALLEY VEW DR	2	9	18
BLACKHAWK DR	1	9	9
44TH STREET	1	7.5	7.5
			34.5

MASTARM MOUNTED TYPE II SIGNS

SIGN MESSAGE	QTY	SQ FT	TOTAL SQ FT
52 ND AVE/BLACKHAWK	1	18.75	18.75
BLACKHAWK/52ND AVE	1	18.75	18.75
ROCK RIVER	2	12	24
EXIT	2	12	24
			85.5

TYPE III SIGNS

STATION	SIGN DIR	SIGN MESSAGE	QTY	SQ FT
1154+00	EB	JOHN DEERE RD / MILAN	1	114
1157+50	WB	ROCK ISLAND/ MILAN	1	96
1158+00	EB	JOHN DEERE RD/RIGHT LANE	1	90
1161+00	EB	JOHN DEERE ROAD	1	74.75
1161+00	WB	ROCK ISLAND/MILAN	1	108
11+50	RAMP 3	IL 5 WEST LEFT 2 LANES	1	50
11+50	RAMP 3	52ND AVE RIGHT ANE	1	28
14+00	RAMP 3	IL 5 WEST	1	37.5
14+00	RAMP 3	52 ND AVE	1	32
359+00	SBR	MILAN/AIRPORT RD	1	56.25
359+00	SBL	MILAN BELTWAY	1	58.5
359+00	NBL	IL 5 EAST JOHN DEERE ROAD W/ARROW	1	114
359+00	NBR	IL 5 WEST BLACKHAWK RD NEXT RIGHT	1	84.5
381+50	SBR	AIRPORT ROAD NEXT RIGHT	1	54
381+50	SBL	MILAN BELTWAY STRAIGHT AHEAD	1	50
381+50	NBL	IL 5 EAST JOHN DEERE RD	1	105
381+50	NBR	IL 5 WEST BLACKHAWK RD	1	88
412+50	SBR	IL 5 WEST ROCK ISLAND	1	87.5
412+50	SBL	MILAN	1	48
418+50	SBL	MILAN LEFT LANES	1	38
416+50	SBR	IL 5 WEST ROCK ISLAND RIGHT LANES	1	78
				1492

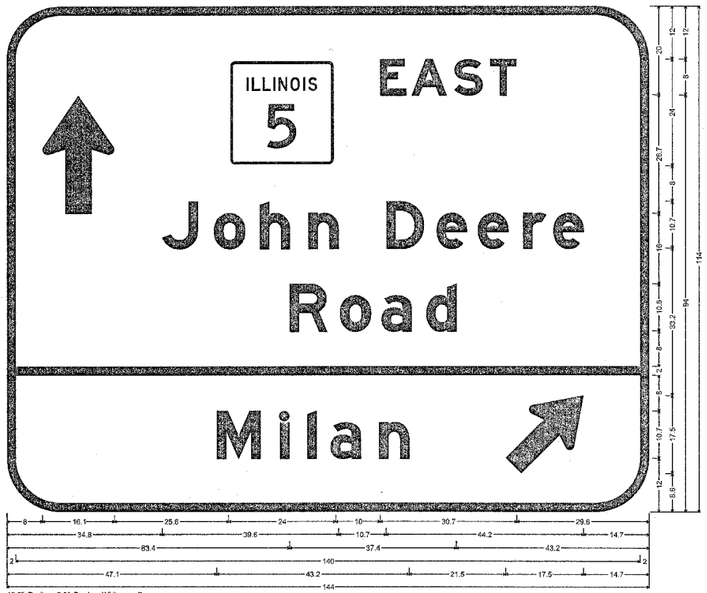

12.0" Radius, 2.0" Border, White on Green;
Standard Arrow Custom 28.8" X 18.1" 90°; [EAST] E Mod; [John Deere] E Mod; [Road] E Mod; [Milan] E Mod; Standard Arrow Custom 22.3" X 13.5" 45°;
Table of letter and object lefts.

↑	M	E	A	S	T
6.9	49.7	53.7	90.9	100.4	106.5
J	o	h	n	D	e	e	r	e
34.8	46.5	56.7	67.6	85.1	96.3	106.6	115.8	122.5
R	o	a	d
83.4	74.7	84.0	94.0
2.0					
M	i	l	a	n	↗
47.1	81.2	87.3	72.6	83.5	111.8

STA 1154+00 EB
POST MOUNTED

12.0" Radius, 2.0" Border, White on Green;
[WEST] E Mod; Standard Arrow Custom 22.3" X 13.5" 90°; [Rock Island] E Mod; Standard Arrow Custom 22.3" X 13.5" 180°; [Milan] E Mod;
Table of letter and object lefts.

M	W	E	S	T
35.8	69.5	79.9	87.5	95.5
T	R	a	c	k	i	s	l	a	n	d
8.3	32.4	43.7	53.5	63.1	80.5	88.1	98.1	101.4	112.2	122.3
2.0										
←	M	i	l	l	a	n
8.3	50.5	64.7	70.8	76.0	86.9

STA 1157+50 WB
POST MOUNTED

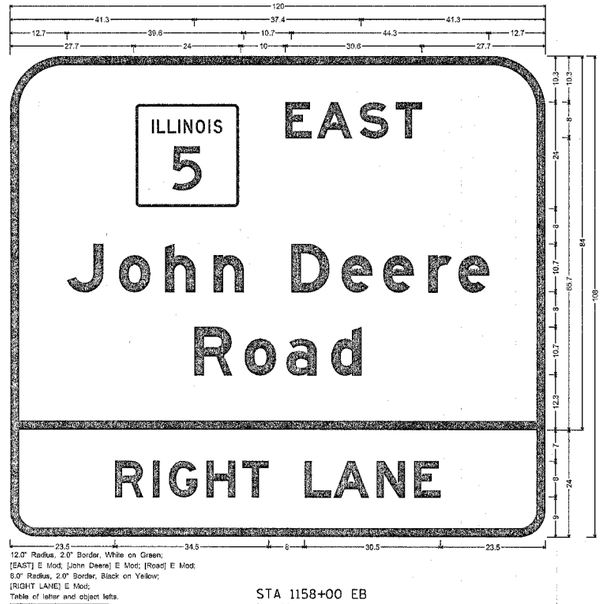

12.0" Radius, 2.0" Border, White on Green;
[EAST] E Mod; [John Deere] E Mod; [Road] E Mod;
6.0" Radius, 2.0" Border, Black on Yellow;
[RIGHT LANE] E Mod;
Table of letter and object lefts.

M	E	A	S	T
27.7	51.7	68.7	78.4	86.4
J	o	h	n	D	e	e	r	e
12.7	24.4	34.7	45.5	53.0	74.3	83.6	93.7	100.5
R	o	a	d
41.3	52.6	61.9	71.9
R	i	G	H	T	L	A	N	E
23.5	31.9	35.6	44.0	52.0	66.0	72.5	82.1	90.5

STA 1158+00 EB
POST MOUNTED

ILLINOIS DEPARTMENT OF TRANSPORTATION

PLOT DATE = Wed Dec 22 13:53:23 2004
FILE NAME = c:\projects\projects\Settings\Voutekier.g\Desktop\Beltway north\d1750\sign sheets.dgn
PLOT SCALE = 20.0000 ' / IN.
REFERENCE = REF