CONTRACT NO. 64647

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
595	1-3-K	ROCK ISLAND	476	317
STA.		TO STA.		
FED. ROAD DIST. NO. _	ILLINOIS	FED. AID PROJECT		

DISTRICT STANDARDS

TREE REPLACEMENT SCHEDULE

SCIENTIFIC NAME	COMMON NAME	SIZE	UNIT	LOCATION	QUANTITY

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES)
UNLESS OTHERWISE NOTED.

5-15-91 90.4

BARRIER REFLECTORS

BARRIER REFLECTOR BRACKET





REFLECTOR MOUNTED ON CONCRETE BARRIER

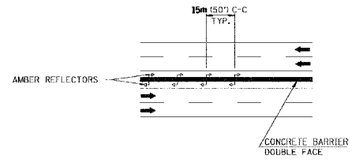





TYPICAL MOUNTING WITH REFLECTOR, BRACKET, & BOLT

NOTES:

BRACKET TO BE FABRICATED FROM 12 GAUGE (MIN) STEEL GALVANIZED IN ACCORDANCE WITH ASSHTO M 111.

INSTALL AMBER REFLECTORS WITH SPACING OF **15m** (50') CENTERS.

BRACKET SHALL BE PLACED BETWEEN THE BOLT HEAD AND THE PLATE WASHER.

REFLECTORS SHALL CONFORM TO THE REQUIREMENTS OF SECTION 784.07 OF THE STANDARD SPECIFICATIONS.

THIS WORK SHALL BE CONSIDERED INCIDENTAL TO UNIT COST OF **CONCRETE BARRIER.**

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

BARRIER REFLECTORS
STANDARD 92.4

TYPICAL MARKING FOR PAINTED ISLANDS

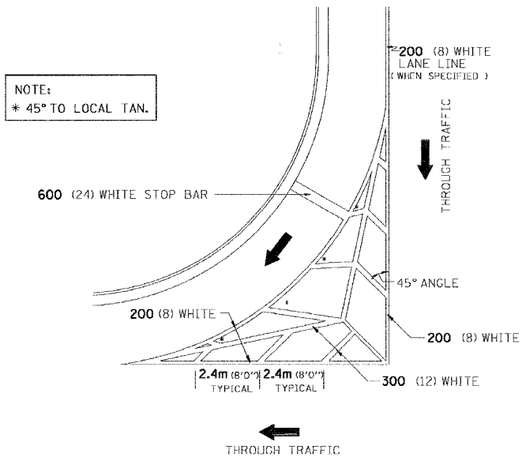

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES)
UNLESS OTHERWISE NOTED.

TYPICAL MARKING FOR PAINTED ISLANDS
1/18/96 93.4

DRAIN FOR AGGREGATE BASE COURSE

NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

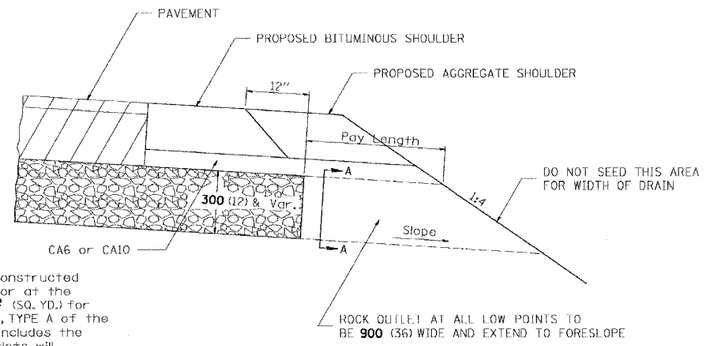



SECTION A-A

NOTE: Slope same as shoulder with 2% min.

NOTES:

The rock outlets shall be constructed using CA7 and will be paid for at the contract unit price per m^2 (SQ. YD.) for SUB-BASE GRANULAR MATERIAL, TYPE A of the thickness specified which includes the filter fabric. The Rock outlets will be measured in TONS , the width being **900** (36) by the length shown above. The cost of the CA6 or CA10 under the shoulder shall be included in the contract unit price per TONS for SUB-BASE GRANULAR MATERIAL, TYPE A of the thickness specified. The filter fabric to be used shall conform to the filter fabric used for Riprap.

REVISED 13-JULY-95 96.4