

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
TR 447	*	Vermilion	16	2
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT	*00-03128-00-BR	

SUMMARY OF QUANTITIES





X080-2A

CODE NO.	ITEM	UNIT	TOTAL QUANTITIES
20100500	TREE REMOVAL, ACRES	ACRE	0.49
*20200100	EARTH EXCAVATION	CU. YD.	77
*20400800	FURNISHED EXCAVATION	CU. YD.	2285
25000200	SEEDING, CLASS 2	ACRE	0.66
25100115	MULCH, METHOD 2	ACRE	0.66
28000250	TEMPORARY EROSION CONTROL SEEDING	POUND	200
28000300	TEMPORARY DITCH CHECKS	EACH	8
28000400	PERIMETER EROSION BARRIER	FOOT	890
35100700	AGGREGATE BASE COURSE, TYPE A, 8"	SO. YD.	1086
*40200800	AGGREGATE SURFACE COURSE, TYPE B	TON	57
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	435
40600300	AGGREGATE (PRIME COAT)	TON	1.7
*50100100	REMOVAL OF EXISTING STRUCTURES	EACH	1
50105220	PIPE CULVERT REMOVAL	FOOT	27
50200100	STRUCTURE EXCAVATION	CU. YD.	117
50300225	CONCRETE STRUCTURES	CU. YD.	72.9
50400605	PRECAST PRESTRESSED CONCRETE DECK BEAMS (33" DEPTH)	SO. FT.	5258
50800105	REINFORCEMENT BARS	POUND	5830
*50901305	STEEL RAILING, TYPE S-1 (SPECIAL)	FOOT	390
51201400	FURNISHING STEEL PILES, HP 10 X 42	FOOT	1036
51202700	DRIVING STEEL PILES	FOOT	1036
51203400	TEST PILE, STEEL HP 10 X 42	EACH	4
51204600	METAL SHOES	EACH	28
51500100	NAME PLATE	EACH	1
58100200	WATERPROOFING MEMBRANE SYSTEM	SO. YD.	585
*X4066414	BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE MIX "C", N 50	TON	205
*X4066614	BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE MIX "C", IL-19.0, N 50	TON	92
*XX004565	GROUTED RIPRAP	SO. YD.	282
*XX004566	CONCRETE CUT-OFF WALL	CU. YD.	5.6
*XX004567	PIPE CULVERTS, TYPE 1 ALUMINIZED CORRUGATED STEEL PIPE, 18" DIA.	FOOT	128
Z0013798	CONSTRUCTION LAYOUT	L. SUM	1

*SEE SPECIAL PROVISIONS

NOTES:

SEE PLAN AND PROFILE SHEET 4 FOR PAVEMENT AND SHOULDER TAPERS.

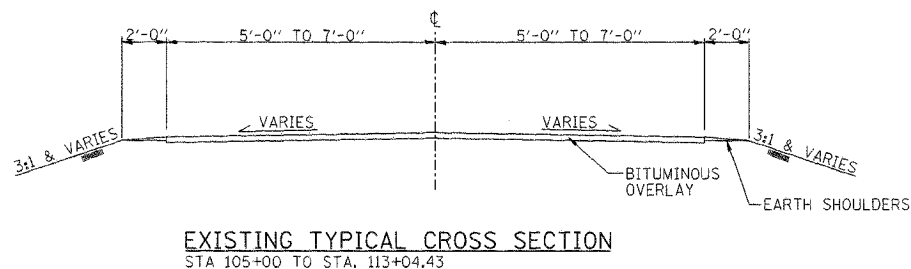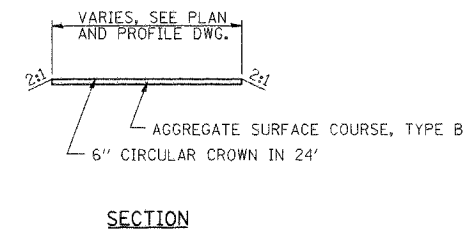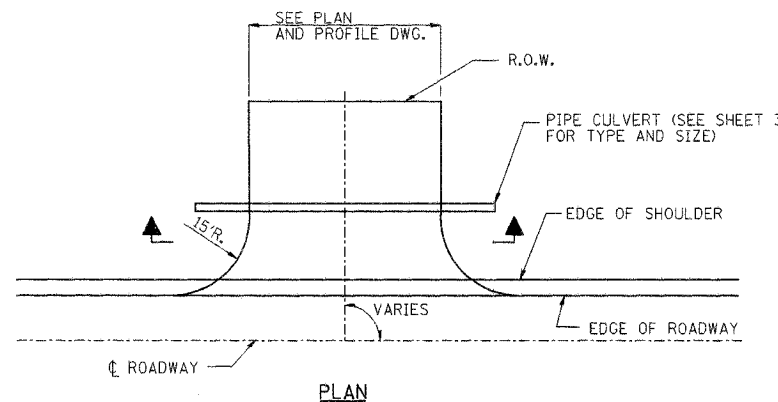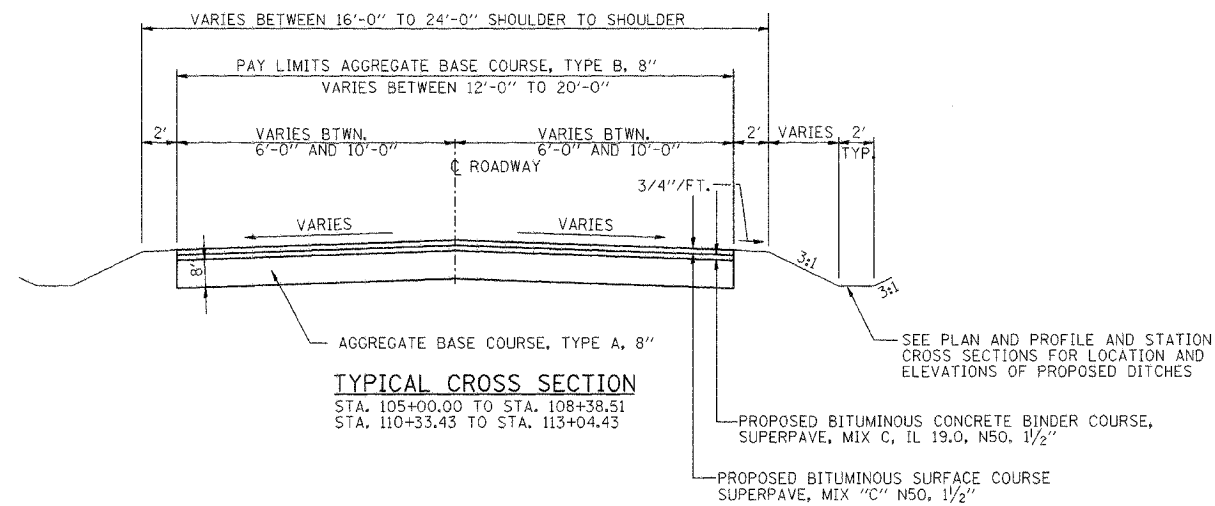

GENERAL NOTES

- The locations of Existing utilities as shown on the plan are for information only, and are not guaranteed. It shall be the Contractor's responsibility to ascertain their exact location from the utility companies and by field inspection.

DSGN	K.E. Brandau				
DR	R.T. Mumm				
CHK	K.E. Brandau				
APVD	K.E. Brandau	NO.	DATE	REVISION	BY

FRAUENHÖFFER

Frauenhoffer and Associates, P.C. Consulting Engineers
 3002 Crossing Court Champaign, IL 61822 217-351-6268

SUM. OF QUANTITIES AND TYP. SECTIONS

CARROLL ROAD DISTRICT
 SECTION 00-03128-00-BR
 VERMILION COUNTY

SHEET	2
DWG NO.	car-sum.dgn
DATE	MAR 2004
PROJ NO.	3080