
TEMPORARY EROSION CONTROL NOTES

- 1. THE CONTRACTOR SHALL INSTALL PERIMETER EROSION BARRIER PRIOR TO STRIPPING OF VEGETATION.
- 2. TEMPORARY DITCH CHECKS SHALL BE INSTALLED IMMEDIATELY AFTER GRADING IS COMPLETED. DITCH CHECKS ARE BASED ON ONE (1) INSTALLATION AND THREE (3) REPLACEMENTS OVER THE DURATION OF THE CONTRACT. THESE ITEMS WILL BE PAID FOR LINEAL FOOT FOR THE ORIGINAL INSTALLATION. REGARDLESS OF THE TYPE OF CONFIGURATION USED.
- 3. RUNOFF FROM EXCAVATED AREAS SHALL LEAVE THE SITE THROUGH SEDIMENT CONTROL
 DEVICES. THE CONTRACTOR SHALL ADJUST HIS OPERATION AND IMPLEMENT EROSION CONTROL
 MEASURES ACCORDINGLY.
- 4. THE PERMIT ISSUED TO THE ILLINOIS DEPARTMENT OF TRANSPORTATION DOES NOT COVER IN-STREAM WORK BY THE CONTRACTOR. AFTER AWARD, THE CONTRACTOR WILL NEED TO COORDINATE AND HAVE A WORK PLAN APPROVED BY THE US ARMY CORPS OF ENGINEERS (USACOE). GUIDELINES ON ACCEPTABLE IN STREAM WORK TECHINQUES CAN BE FOUND ON THE USACOE WEBSITE: http://www.lrc.usage.army.mil/.

- 5. THE CONTRACTOR SHALL SURROUND ANY NECESSARY EARTH STOCKPILES WITH PERIMETER EROSION BARRIER.
- 6. THE CONTRACTOR SHALL MAINTAIN ALL EROSION CONTROL DEVICES AT ALL TIMES. EROSION CONTROL DEVICES SHALL BE INSPECTED EVERY SEVEN CALENDAR DAYS OR WITHIN 24 HOURS AFTER A 13 MM (0.5 INCH) RAINFALL OR SNOWFALL.
- 7. THE CONTRACTOR SHALL SEED ALL DISTURBED AREAS AS SOON AS PRACTICAL AFTER CONSTRUCTION ACTIVITIES IN THAT AREA HAVE BEEN CONCLUDED. AREAS THAT HAVE STEEP SLOPES OR WILL NOT RECEIVE PERMANENT LANDSCAPING, SHALL BE TEMPORARILY SEEDED. ALL FLATTER AREAS OR AREAS WHERE NO FURTHER WORK IS TO OCCUR FOR ONE MONTH OR MORE SHALL BE SEEDED AND COVERED WITH EROSION CONTROL BLANKET WITHIN SEVEN (7) CALENDAR DAYS.





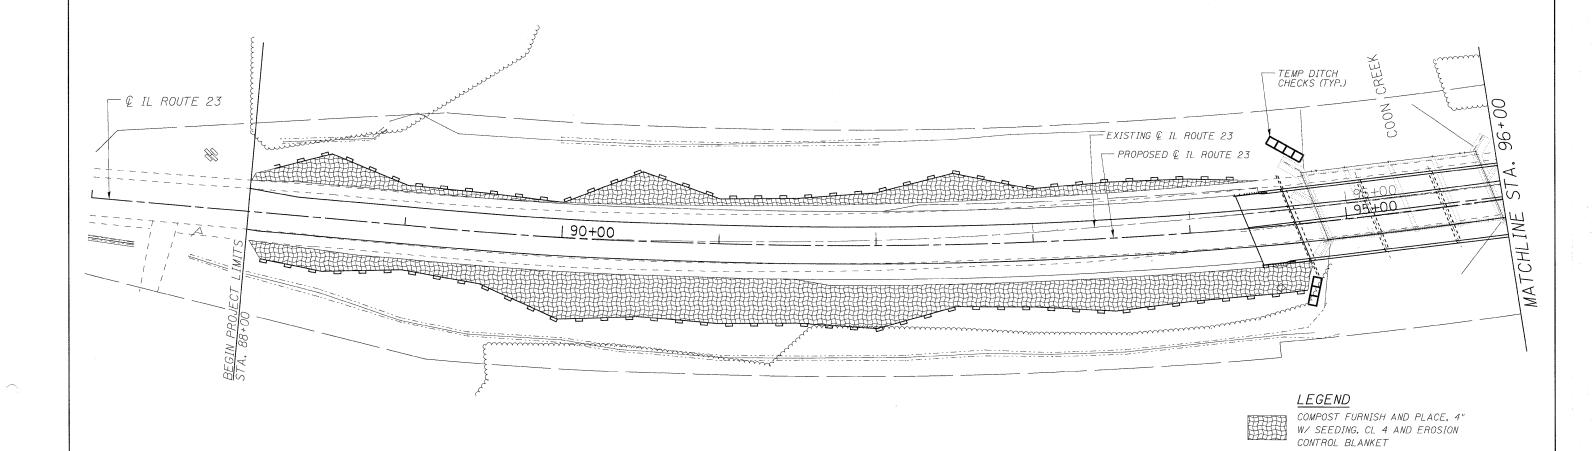

	DESIGNED - MJY	KEVISED -
	DRAWN - ST, TSC	REVISED -
CONSULTING ENGINEERS 1560 WALL ST, SUITE 222 NAPERVILLE, ILLINOIS 60563 PH: (630) 577-9100	CHECKED - MJY, SLV	REVISED -
	DATE - 12/30/2010	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

	EROSION	CONTROL PL	AN
	IL ROUTE 23	OVER COON	CREEK
SCALE: 1" = 30'	SHEET NO. 1 OF 2	STA.	88+00 TO STA. 96+00

A.P. TE.	SECTION						COUNTY		TOTAL SHEETS	SHEET NO.
324	4 24 B-2						MCHENRY		76	21
D-91-178-09					T	CONTRACT NO. 60F64				
ED. RO	DAD DIS	Τ.	NO.	ILLINOIS	FED.	AID	PROJECT			

- PERIMETER EROSION BARRIER

TEMPORARY DITCH CHECKS (STD 280001)