

EXISTING:

- (A) EXISTING 9" CONTINUOUSLY REINFORCED PCC PAVEMENT
- (B) EXISTING HMA OVERLAY
- (C) EXISTING 4" STABILIZED SUBBASE
- (D) EXISTING TEMPORARY CONCRETE BARRIER WALL
- (E) EXISTING COMBINATION CONCRETE CURB AND GUTTER TYPE B-6.24
- (F) EXISTING CONCRETE CURB TYPE B
- (G) EXISTING GRASS MEDIAN
- (H) NOT USED
- (I) EXISTING 10" PCC BASE
- (J) NOT USED
- (K) EXISTING STABILIZED SHOULDERS, VARIES 12"-14"
- (L) EXISTING AGGREGATE SHOULDERS
- (M) EXISTING 9" PCC BASE
- (N) EXISTING STEEL GUARDRAIL
- (O) EXISTING TOPSOIL

PROPOSED:


- (1) POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90, 1 3/4 "
- (2) POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, 3/4 " & VARIES
- (3) HOT-MIX ASPHALT SHOULDERS, 10" POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90, 1 3/4 " HOT-MIX ASPHALT BINDER COURSE, IL 19.0, N70, 8 1/4 "
- (4) PCC PAVEMENT 9" (JOINTED)
- (5) AGGREGATE BASE COURSE, TYPE B 6"
- (6) AGGREGATE SUBGRADE IMPROVEMENT
 - (6a) 3" CA-6 AGGREGATE CAP
 - (6b) 9" POROUS GRANULAR EMBANKMENT
- (7) AGGREGATE SHOULDERS, TYPE B, 6"
- (8) COMBINATION CONCRETE CURB AND GUTTER, B-6.18
- (9) PCC PAVEMENT 10 1/2" (JOINTED)
- (10) STABILIZED SUBBASE - HOT-MIX ASPHALT, 4 1/2 "
- (11) STEEL PLATE BEAM GUARDRAIL, TY. A 6 FT POSTS
- (12) CONCRETE CURB, TYPE B
- (13) CONCRETE BARRIER, DOUBLE FACE, 42 IN. HEIGHT
- (14) PCC SHOULDERS 10 1/2"
- (15) BITUMINOUS MATERIALS (PRIME COAT)
- (16) REGRADING AND LANDSCAPING TOPSOIL EXCAVATION AND PLACE, 6" SEEDING, CLASS 2A
- (17) HMA SURFACE REMOVAL, 2 1/2 "
- (18) PAVED SHOULDER REMOVAL
- (19) PCC SHOULDERS 9"
- (20) DRILL AND GROUT NO. 6 TIE BARS AT 30" CTS (STAGGERED SIDE BY SIDE) INCLUDED IN COST OF CONCRETE BARRIER, DOUBLE FACE, 42 IN. HEIGHT
- (21) CONCRETE BARRIER, VARIABLE CROSS-SECTION, 42" HEIGHT
- (22) LEVELING BINDER (MACHINE METHOD), N70
- (23) HMA SURFACE REMOVAL, VARIABLE DEPTH
- (24) COMBINATION CONCRETE CURB AND GUTTER, B-6.24
- (25) EXCESS PAVEMENT REMOVAL
- (26) CONCRETE BARRIER BASE

(27) LONGITUDINAL CONSTRUCTION JOINT. DRILL AND GROUT NO. 6 DEFORMED TIE BARS 24" LONG AT 24" C-C. (INCLUDED IN THE COST OF PORTLAND CEMENT CONCRETE SHOULDERS 10 1/2" OR 9")

(28) LONGITUDINAL SAWED OR CONSTRUCTION JOINT. FOR LONGITUDINAL SAWED JOINT, POUR IN PLACE NO. 6 DEFORMED EPOXY TIE BARS 30" LONG AT 30" C-C. FOR LONGITUDINAL CONSTRUCTION JOINT, DRILL AND GROUT NO. 6 DEFORMED EPOXY TIE BARS 24" LONG AT 24" C-C. INCLUDED IN COST OF PORTLAND CEMENT CONCRETE PAVEMENT 10 1/2" OR 9" (JOINTED)

(29) PIPE UNDERDRAINS 6"



BOWMAN, BARRETT & ASSOCIATES INC.
CONSULTING ENGINEERS
Chicago, Illinois
312.228.0100
www.bbandainc.com

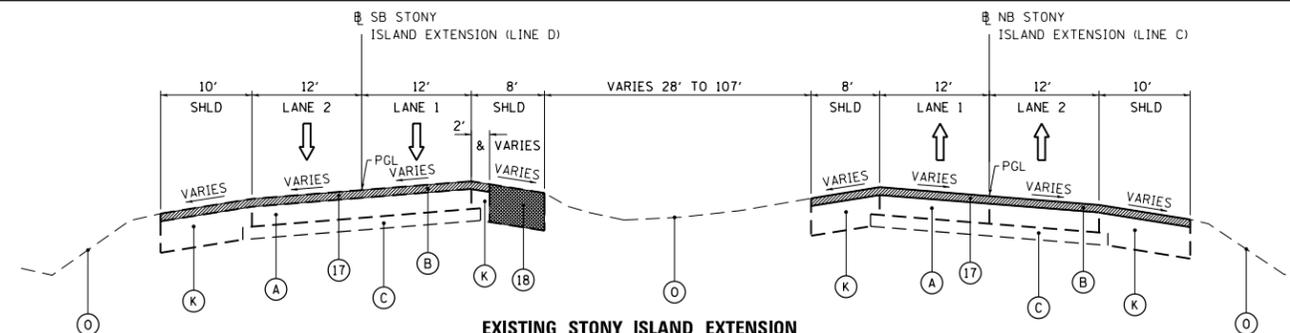

EXISTING STONY ISLAND EXTENSION


NB (LINE C): STA 47+02.66 TO STA 58+37.74
SB (LINE D): STA 37+10.90 TO STA 58+30.29
LOOKING NORTH

TYPICAL DETAIL FOR RESURFACING AT EDGE OF SHOULDER

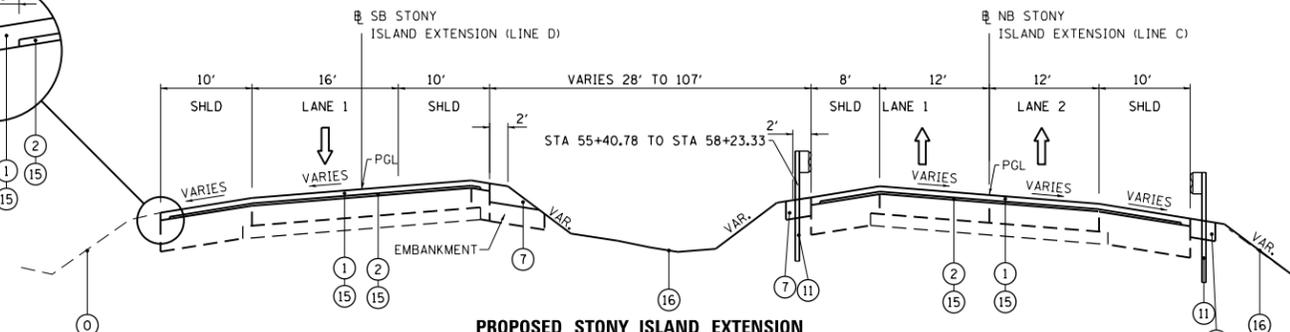


PROPOSED STONY ISLAND EXTENSION

NB (LINE C): STA 47+02.66 TO STA 58+37.74
SB (LINE D): STA 48+52.73 TO STA 58+30.29
LOOKING NORTH

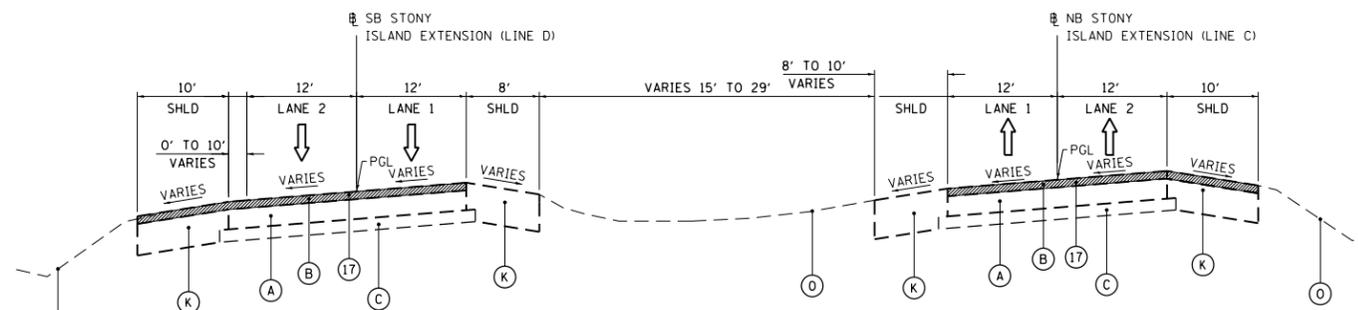

EXISTING STONY ISLAND EXTENSION

NB (LINE C): STA 60+75.02 TO STA 69+80.00
SB (LINE D): STA 60+67.60 TO STA 69+80.00
LOOKING NORTH

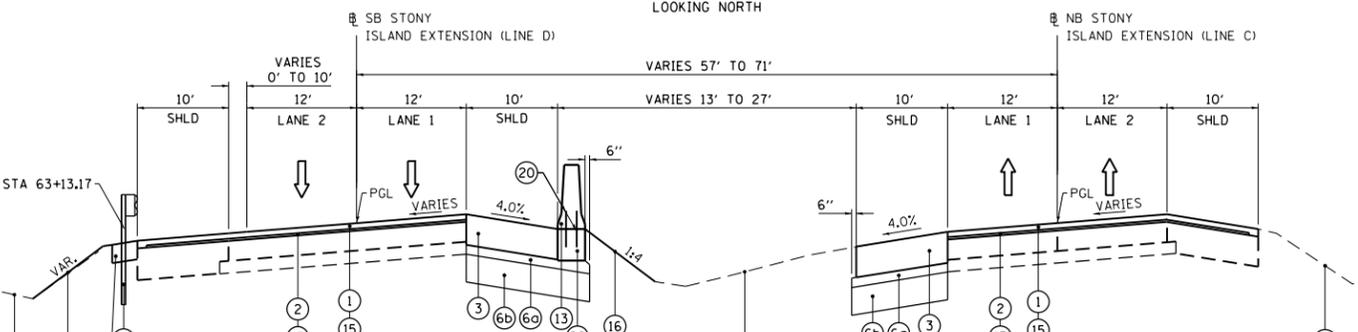

PROPOSED STONY ISLAND EXTENSION

NB (LINE C): STA 60+75.02 TO STA 69+80.00
SB (LINE D): STA 60+67.60 TO STA 69+80.00
LOOKING NORTH

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**TYPICAL SECTIONS
STONY ISLAND EXTENSION**

FILE NAME =	USER NAME = default	DESIGNED -	RTF	REVISED -	
*FILE#		DRAWN -	RTF	REVISED -	
	PLOT SCALE = *SCALE*	CHECKED -	RR	REVISED -	
	PLOT DATE = 3/29/2013	DATE -	03/29/2013	REVISED -	

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
94	2012-059-BR	COOK	631	27
				CONTRACT NO. 60J12
ILLINOIS FED. AID PROJECT				

S:\1072-05-CADD\01680112-Sheet\01680112-sh1-typsec01.dgn