




*** REDUCE TO 40' (12 m) O.C. ON CURVES WITH POSTED OR ADVISORY SPEED 45 M.P.H. (70 km/h) OR LESS.

TWO-LANE/TWO-WAY

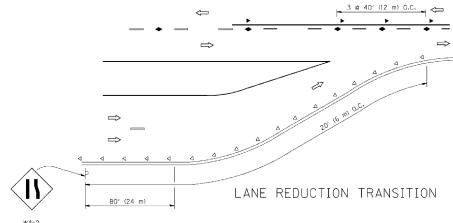


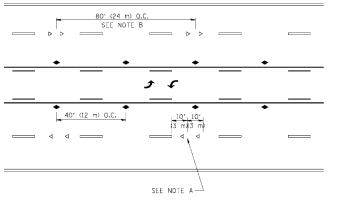

TWO-WAY LEFT TURN

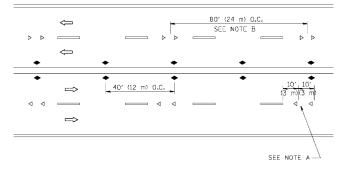

MULTI-LANE/UNDIVIDED

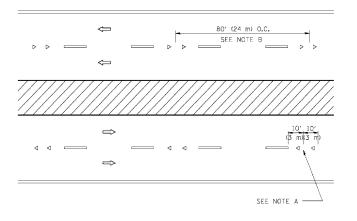

MULTI-LANE/DIVIDED

GENERAL NOTES

- 1. MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- 2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- 3. MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

LANE MARKER NOTES


- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.
- 8. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.

SYMBOLS

- YELLOW STRIPE
- ----- WHITE STRIPE
- ONE-WAY AMBER MARKER
- ONE-WAY CRYSTAL MARKER (₩/O)
- ◆ TWO-WAY AMBER MARKER

DESIGN NOTES

- 1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- 2. EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE
- 3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN
- 4. MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY INVOLVED.

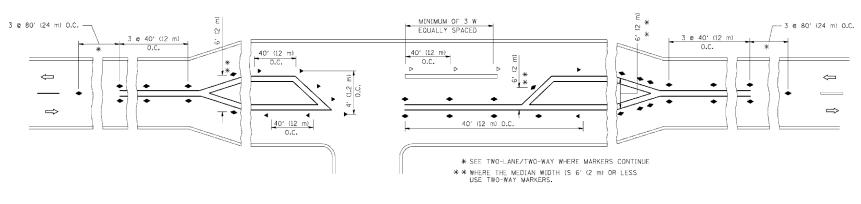

LEFT TURN

All dimensions are in inches (millimeters) unless otherwise shown.

USER NAME = drivakosgn DESIGNED REVISED -T. RAMMACHER 09-19-94 REVISED -T. RAMMACHER 03-12-99 DRAWN \pw_work\pwidot\drivakosan\d0108315\to!i.dan PLOT SCALE = 50.000 '/ IN. CHECKED -REVISED -T. RAMMACHER 01-06-00 REVISED - C. JUCIUS 09-09-0

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT) SHEET NO. 1 OF 1 SHEETS STA. FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT

COUNTY TOTAL SHEE NO. SECTION McHENRY 32 28 066 21-RS-3 CONTRACT NO. 60N27 TC-11