




**TYPE 5 - CONCRETE BRIDGE PARAPET**

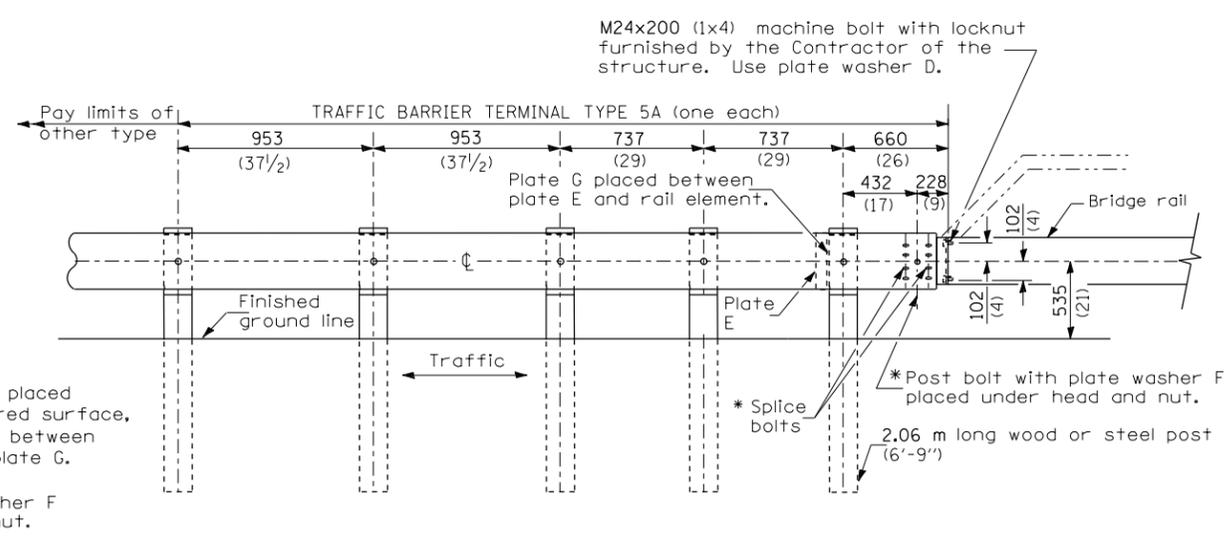


**TYPE 5A - STEEL BRIDGE RAIL**

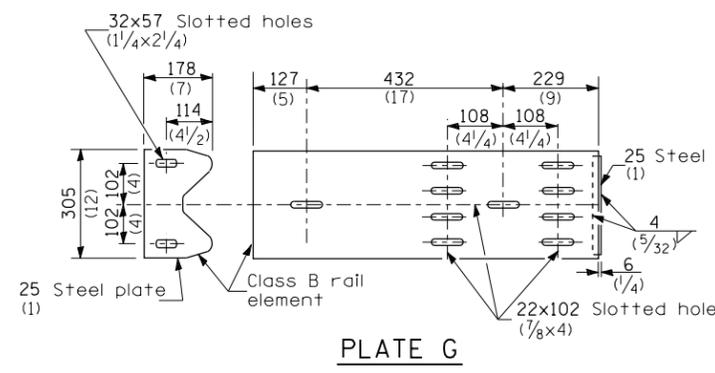

**PLATE G**

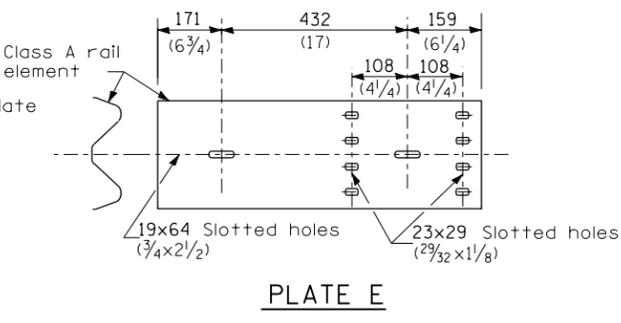

**PLATE E**

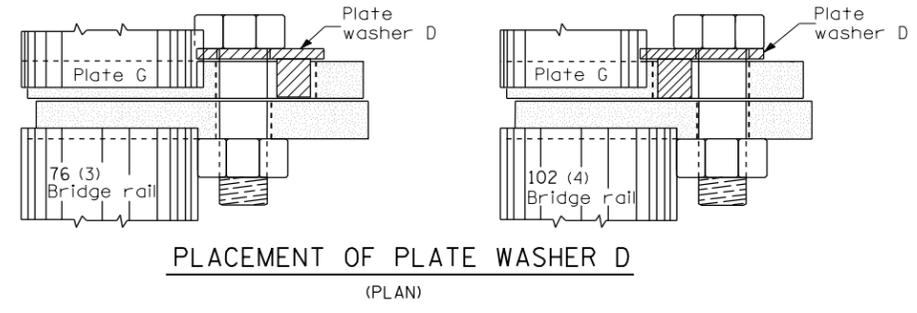


**GENERAL NOTES**

Install plate washer D so that the 25 mm (1") projection fills the remainder of the slotted holes in the 25 mm (1") end plate on plate G after the M24 (1") dia. bolts are in place.


\* Bolts shall be provided with locknut or double nut and shall be tightened only to a point that will allow plate G to be free to move when an expansion joint exists below the connector.

See Standard 630001 for details of guardrail not shown.

All dimensions are in millimeters (inches) unless otherwise shown.

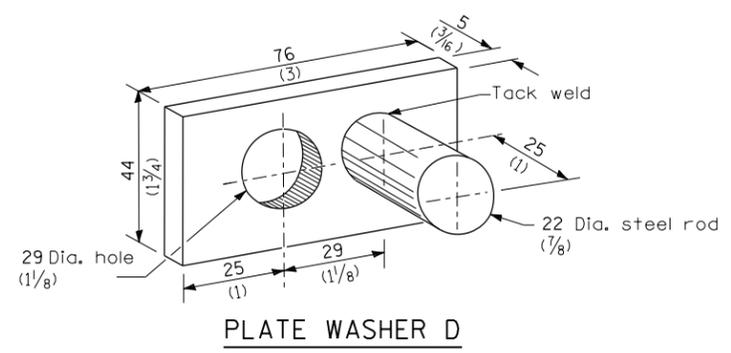

**PLATE WASHER D**

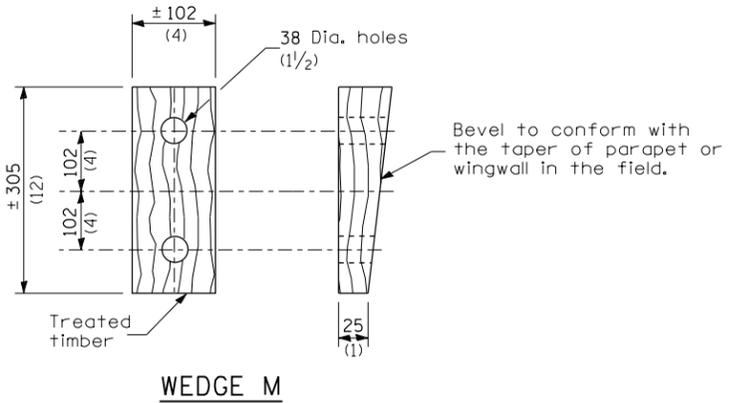

**WEDGE M**