


Note A:
6-100 \$\phi\$ Ducts to be removed and replaced by others. ComEd to provide temporary support prior to Stage II Removal. Hangers and inserts in new bridge deck per ComEd requirements. Inserts are to be furnished and placed by the Contractor. This work

shall be included in the cost of Concrete Superstructure bid item.

Note B: 90 \$\phi\$ Ducts to be removed and replaced with 75 \$\phi\$ Ducts. Contractor to provide temporary support prior to Stage II Removal. Hangers, Inserts and ducts in new bridge deck per City of Chicago Electric requirements. Inserts, hangers and ducts are to be furnished and placed by the Contractor. This work shall be included in the cost of Concrete Superstructure bid item.

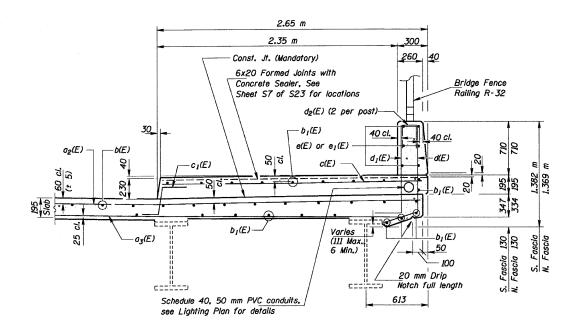

DETAIL 1

Notes

All dimensions are in millimeters (mm) except as noted. See Sheet SIO of S23 for Bill of Materials. See Electrical Drawings for Underpass Luminaire location and attachment details to deck.

REVISIONS
NAME DATE

COLLINS Subs 300
ENGINEERS 2 (312) 704-9300
ELINOIS PROFESSIONAL DESIGN FIRM LICENSE NO. 184-000993

ILLINOIS DEPARTMENT OF TRANSPORTATION
115 TH. STREET OVER FAI 57
FAU RTE. 1584 SEC. 068-1919.2-CF
COOK COUNTY
STATION 2+382.915
STRUCTURE NO. 016-2037

SUPERSTRUCTURE DETAILS-I

DRAWN BY KAC CHECKED BY ERBIDGE

DATE: JANUARY 16, 20