

CONTRACT NO. 60640



STA. 0+902± TO STA. 0+911.5±
(FOR STAGE II)



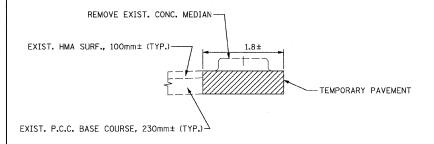





W6-3

END ROAD WORK

1200mm

900mm × 450mm

G20-2a

600mm × 600mm

R4-7b

600mm × 750mm


R9-10

600mm x 300mm

## TEMPORARY SIGN LEGEND

## NOTES:

- 1. FOR BRIDGE DECK STAGING TYPICAL SECTIONS, SEE STRUCTURAL PLANS, SHEET NO. 50.
- 2. THE COST OF REMOVAL OF THE TEMPORARY PAVEMENT SHALL BE PAID FOR AS PAVEMENT REMOVAL.

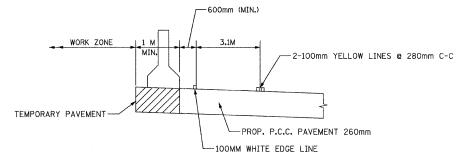

SECTION B-B
STA. 1+040 TO STA. 1+048
(FOR STAGE II)

CHRISTIAN-ROGE & ASSOCIATES, INC.
ENGINEERS-PLANNERS-SURVEYORS
211 WEST WACKER DRIVE
CHICAGO, ILLINOIS 60606
1-312-372-2023 FAX: 1-312-372-5274

ILLINOIS DEPARTMENT OF TRANSPORTATION
SUGGESTED STAGES OF CONSTRUCTION
AND TRAFFIC CONTROL
TEMPORARY SIGNS AND DETAILS
CENTRAL AVENUE AND
I-90 EXPRESSWAY / RAMP

SCALE: NONE
DATE NOVEMBER 2007

DRAWN BY B.K. CHECKED BY S.J.P.