
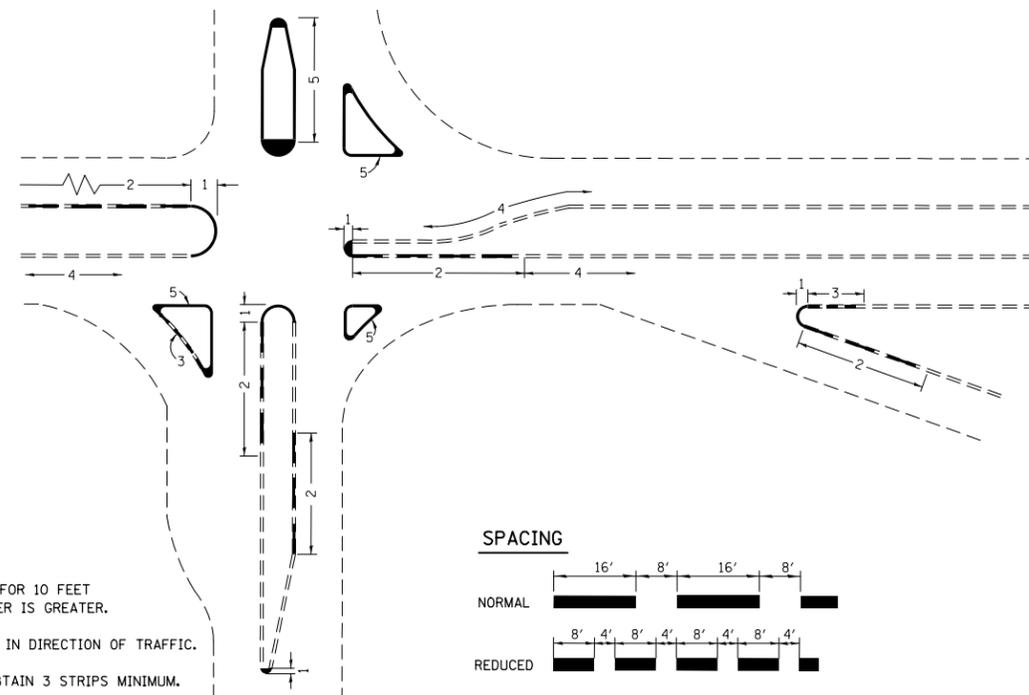


ONE-WAY AMBER RAISED REFLECTIVE PAVEMENT MARKERS @ 40' CENTERS

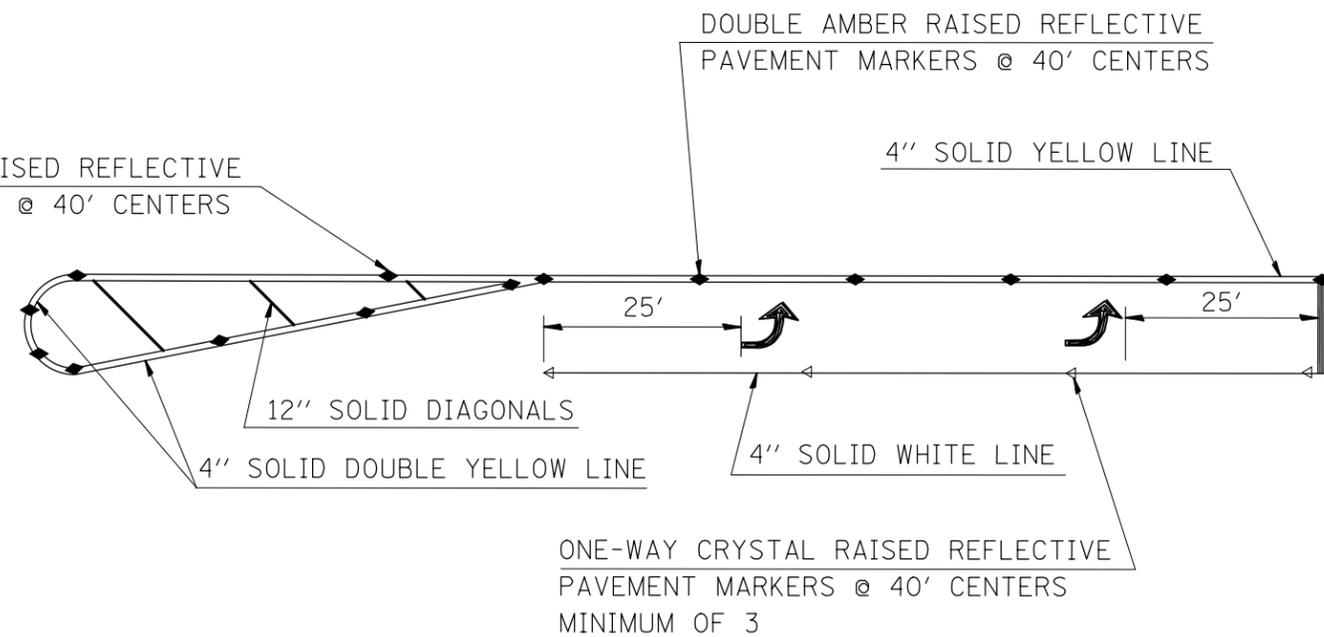

**NOTES**

1. PAINT CURB AND NOSE SOLID FOR 10 FEET OR RADIUS OF NOSE, WHICHEVER IS GREATER.
2. PAINT MINIMUM OF 3 STRIPES IN DIRECTION OF TRAFFIC.
3. REDUCED SPACING USED TO OBTAIN 3 STRIPS MINIMUM.
4. STRIPING RECOMMENDED ONLY WHERE OPERATIONAL PROBLEMS DICTATE.
5. PAINT SOLID WHERE A MINIMUM OF 3 STRIPES CANNOT BE PLACED.

FILE NAME =	USER NAME = elyaskordto	DESIGNED -	REVISED -
es:\pwork\pwork\elyaskordto\0316383\076g06-sht-plan.dgn		DRAWN -	REVISED -
	PLOT SCALE = 100.1553' / in.	CHECKED -	REVISED -
*MODELNAME*	PLOT DATE = 4/12/2013	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**PAVEMENT MARKING DETAILS**

SCALE: SHEET 1 OF 2 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2	(101, 102)RS-2, 202RS-4	MADISON	69	64
CONTRACT NO. 76G06				
ILLINOIS FED. AID PROJECT				