


REINFORCEMENT FOR SOUTHWEST RET. WALLS					
BAR	SIZE	SHAPE	LENGTH	NUMBER	WEIGHT LBS.
A "E"	5		3'	8	25
B "E"	4		VAR.*	19	50
TOTAL					75

* FINAL QUANTITY OF BAR B "E" TO BE DETERMINED IN FIELD

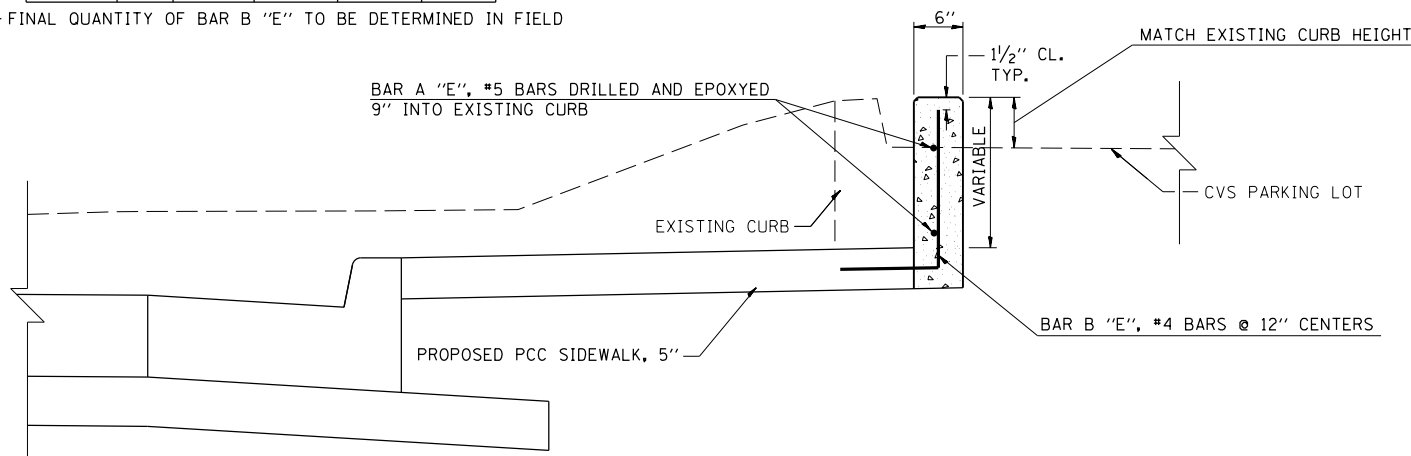


	CONCRETE STRUCTURES (CU. YD.)
0+28.60 TO 0+37.26, SW RAD.	0.32
0+71.76 TO 0+83.92, SW RAD.	0.41
0+00 TO 0+61.93, SE RAD.	1.61
TOTAL	2.34

SEE S.W. RADIUS CROSS SECTIONS FOR SIDEWALK ELEVATIONS.


WORK INVOLVED IN THE CONSTRUCTION OF RETAINING WALLS AND REINFORCEMENT WILL BE PAID FOR AS CONCRETE STRUCTURES (CU YD.).

RETAINING WALL DETAIL

(TO BE USED STA. 0+28.60 TO 0+37.26
& 0+71.76 TO 0+83.92, SW RADIUS)

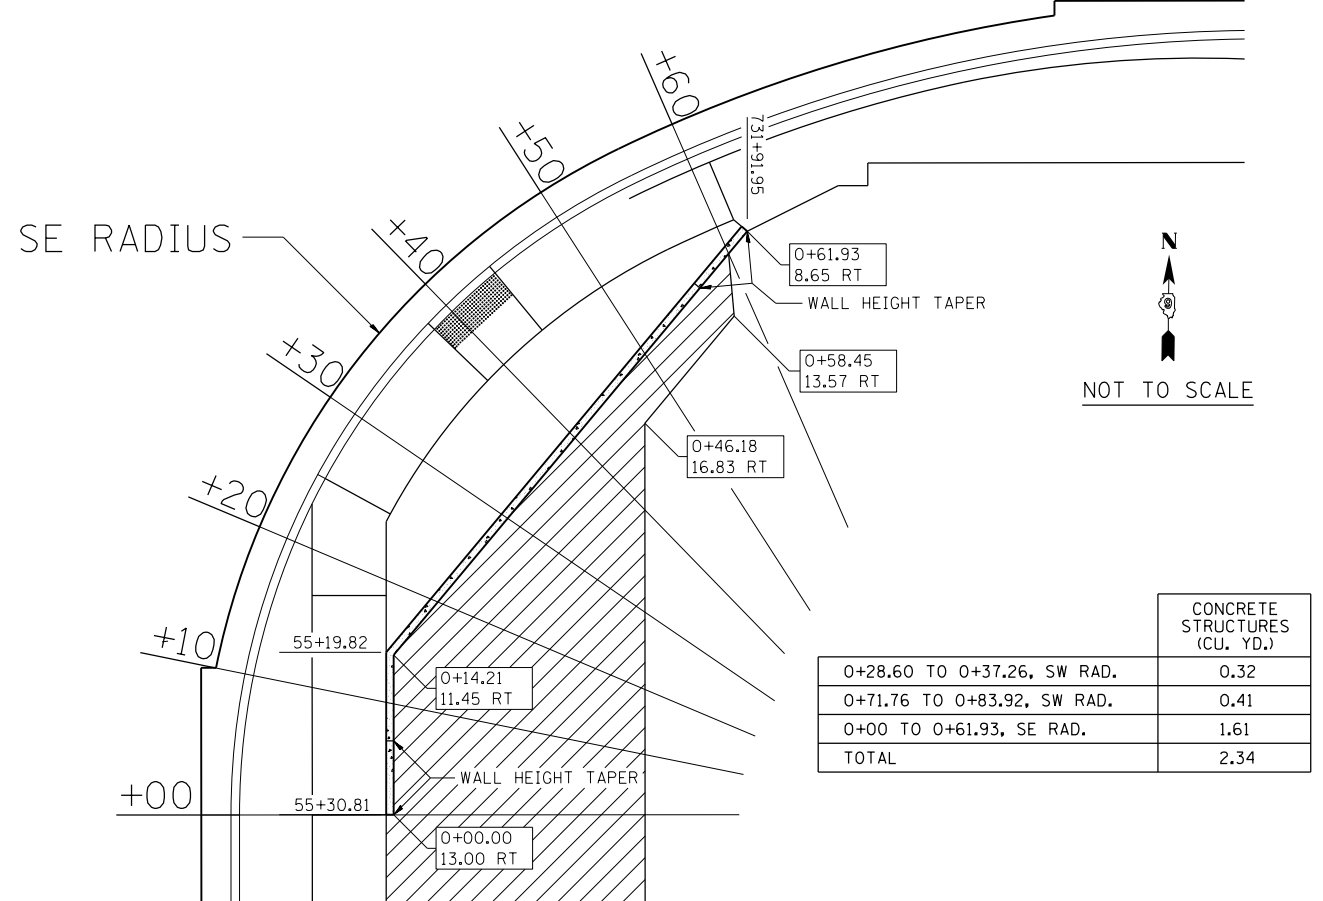

	CONCRETE STRUCTURES (CU. YD.)
0+28.60 TO 0+37.26, SW RAD.	0.32
0+71.76 TO 0+83.92, SW RAD.	0.41
0+00 TO 0+61.93, SE RAD.	1.61
TOTAL	2.34

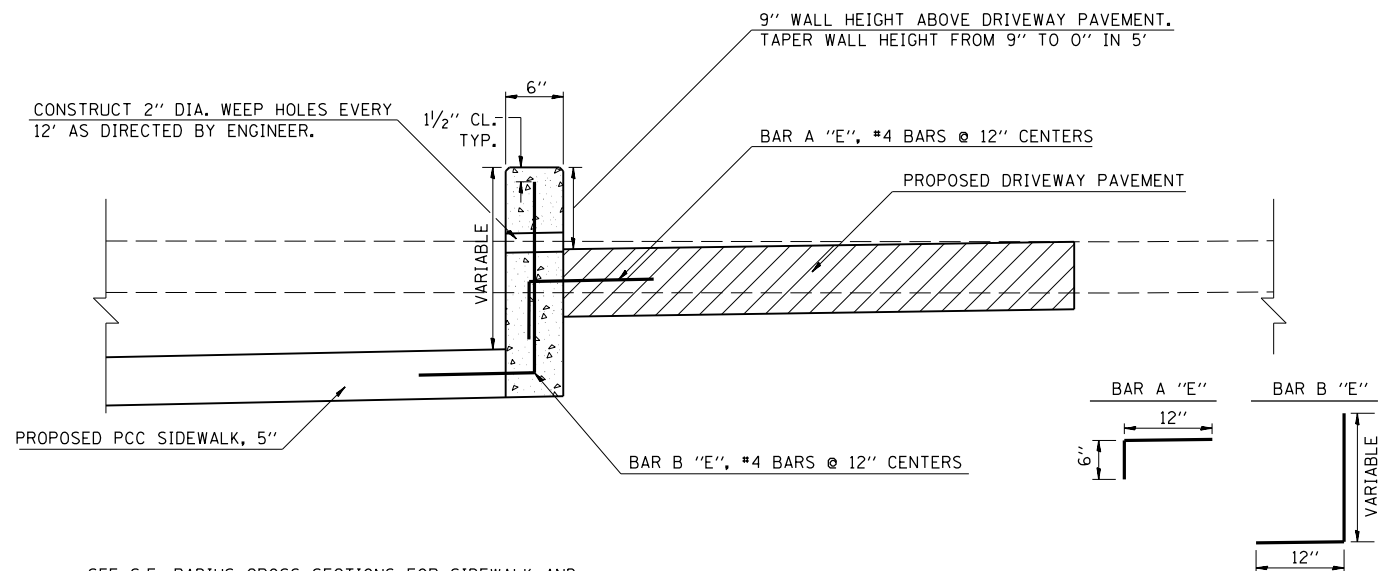

SEE S.E. RADIUS CROSS SECTIONS FOR SIDEWALK AND DRIVEWAY PAVEMENT ELEVATIONS.

WORK INVOLVED IN THE CONSTRUCTION OF RETAINING WALL, INCLUDING WEEP HOLES AND REINFORCEMENT WILL BE PAID FOR AS CONCRETE STRUCTURES (CU YD.).

REINFORCEMENT FOR SOUTHEAST RET. WALL					
BAR	SIZE	SHAPE	LENGTH	NUMBER	WEIGHT LBS.
A "E"	4		18"	47	47
B "E"	4		VAR.*	47	78
TOTAL					125

* FINAL QUANTITY OF BAR B "E" TO BE DETERMINED IN FIELD

RETAINING WALL DETAIL

(TO BE USED STA. 0+00 TO 0+61.93, SE RADIUS)