

## **MAILBOX TURNOUT DETAILS**


ROUTE	SECTION	COUNTY	TOTAL SHEET SHEETS, NO.
FAS 680 (CH 4)	12-00111-00-RS	EDGAR	27   25
CONTRACT NO. 91485			
EDGAR COUNTY, ILLEN	vois EFO. 4	.ID PROJECT	

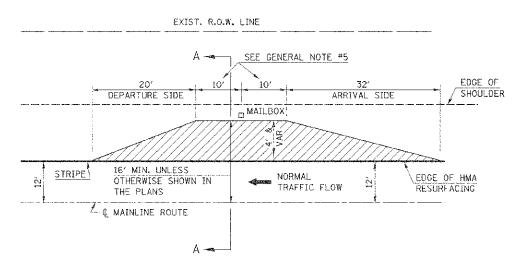


TYPICAL APPLICATION

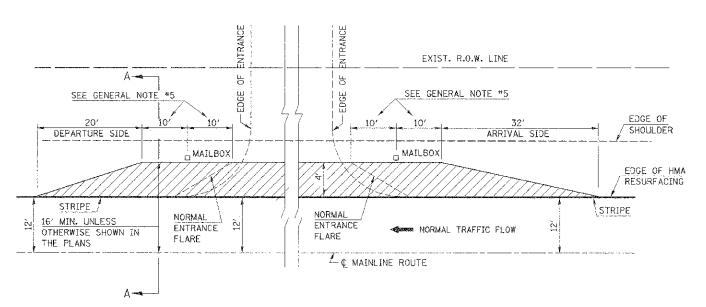

TYPICAL MAILBOX TURNOUT PLACEMENT ADJACENT TO ENTRANCE



INCIDENTAL HOT-MIX-ASPHALT SURFACING

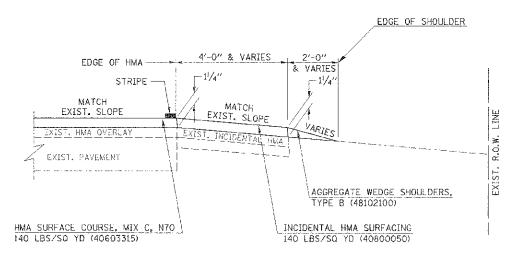

SECTION A-A

## GENERAL NOTES

- 1. THE TEMPORARY RELOCATION OF EXISTING MAILBOXES SHALL BE IN ACCORDANCE WITH ARTICLE 107.20 OF THE STANDARD SPECIFICATIONS.
- 2. WHEN MORE THAN ONE MAILBOX IS INCLUDED IN A PARTICULAR LOCATION THE TWO 10' DIMENSIONS AS SHOWN ABOVE SHALL BE FROM THE END MAILBOX.
- 3. CROSS SLOPE SHALL BE AS SHOWN ON THE STATION CROSS SECTIONS AND/OR AS DIRECTED BY THE ENGINEER.
  MINIMUM 4% (1/2"/") DESIRABLE; MAXIMUM 8% (1"/")
- 4. WHEN MAILBOX TURNOUTS ARE CONSTRUCTED ADJACENT TO FIELD ENTRANCES, THE WIDTH OF THE INCIDENTAL HMA SURFACING CONSTRUCTED FOR THE FIELD ENTRANCE SHALL MATCH THE WIDTH OF THE PROPOSED MAILBOX TURNOUT SURFACING.
- 5. THE TOTAL SHOULDER WIDTH, (4') MINIMUM, SHALL BE PAVED BETWEEN SIDEROADS ENTRANCES AND/OR MAILBOX TURNOUTS AT LOCATIONS WHERE THE DISTANCE BETWEEN RADIUS OR TAPER CONTROL POINTS IS LESS THAN (50').
- 6. MAILBOXES SHALL BE MOUNTED SUCH THAT THE FACE OF THE MAILBOX IS 6" TO 12" AND THE POST A MINIMUM OF 24" FROM THE EDGE OF THE TURNOUT SURFACING.



EDGAR COUNTY HIGHWAY DEPARTMENT