



- NOTES:
  1. FASTEN DECKING TO JOISTS WITH STAINLESS STEEL WOOD SCREWS.
- 2. COLOR OF PLASTIC LUMBER TO BE SELECTED BY SITE MANAGER.
- 3. ALL WOOD, EXCEPT WHERE NOTED IS TO BE NO. 1 ACQ TREATED SOUTHERN PINE.
- 4. FASTEN JOISTS TO POSTS WITH STAINLESS STEEL LAG BOLTS.
- VERIFY ELEVATIONS OF EXISTING STAIR AND TOP OF CONCRETE STAIRCASE PRIOR TO CONSTRUCTION OF WOOD WALKWAY.

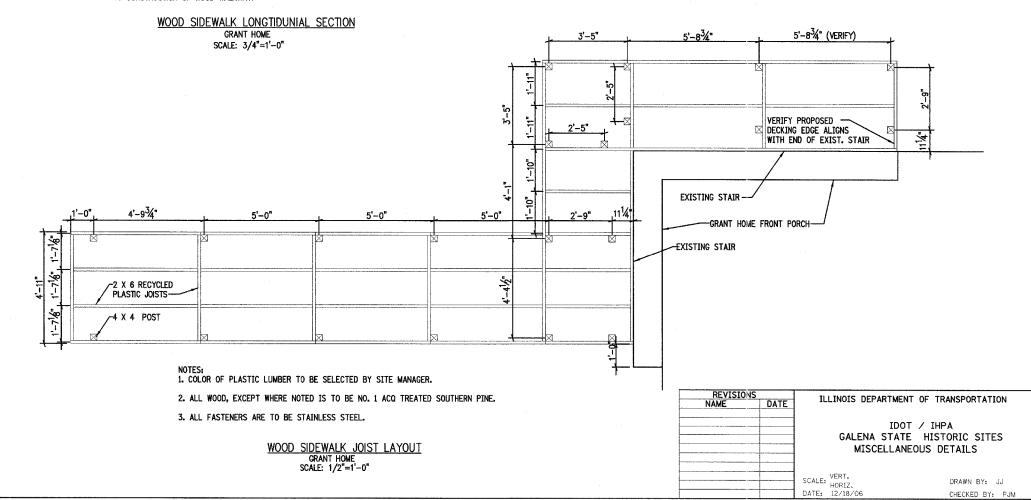

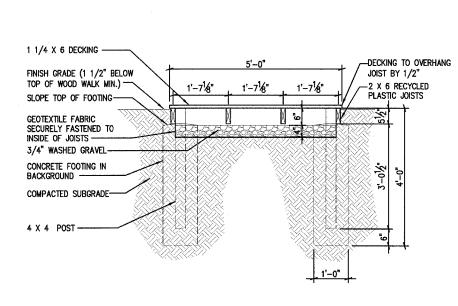

NOTES:
1. FASTEN DECKING TO JOISTS WITH STAINLESS STEEL WOOD SCREWS.

- 2. COLOR OF PLASTIC LUMBER TO BE SELECTED BY SITE MANAGER.
- 3. ALL WOOD, EXCEPT WHERE NOTED IS TO BE NO. 1 ACQ TREATED SOUTHERN PINE.
- 4. FASTEN JOISTS TO POSTS WITH STAINLESS STEEL LAG BOLTS.

WOOD SIDEWALK CROSS SECTION

CRANT HOME
SCALE: 3/4"=1'-0"