
CONTRACT NO. DEC. 19 SECTION S

SEE NOTE B

3 p 40' (12 m) 0.C.

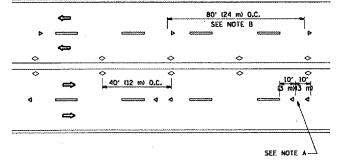

MULTI-LANE/UNDIVIDED

3 @ 40' (12 m)

SEE NOTE A

MULTI-LANE/DIVIDED

GENERAL NOTES

- MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- 2. MARKERS USED ADJACENT TO SOLID LIMES SHALL BE OFFSET 2 TO 3 (SO TO TS) TOWARD TRAFFIC AS SHOWN.
- 3. MARKERS THROUGH TANGENTS LESS THAN 500' 1150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

LANE MARKER NOTES

- B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 м.Р.Н 120 кm/h) LOWER THAN POSTED SPEEDS.
- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.

- 3 a 80' (24 m) O.C.

SYMBOLS

- YELLOW STRIPE
- WHITE STRIPE
- ONE-WAY AMBER MARKER
- ONE-WAY CRYSTAL MARKER (W/O)

 TWO-WAY AMBER MARKER

.

SEE TWO-LANE/TWO-WAY WHERE MARKERS CONTINUE

WHERE THE MEDIAN WIOTH IS 6' (2 m) OR LESS

LISE TWO-WAY WHERE MARKERS CONTINUE

MINIMUM OF 3 W EQUALLY SPACED

LEFT TURN

All dimensions are in inches (millimeters) unless otherwise shown.

REVISIO	NS I
NAME	DATE
T. RAMMACHER	09-19-94
T. RAMMACHER	03-12-99
T. RAMMACHER	01-06-00

ILLINOIS DEPARTMENT OF TRANSPORTATION

TYPICAL APPLICATIONS
RAISED REFLECTIVE PAVEMENT
MARKERS (SNOW-PLOW RESISTANT)

SCALE: NONE

DRAWN BY CADD CHECKED BY

DATE = 4/3/2987 NAME = Phydiswad/willdgm SCALE = 188,388 */ 3%, NAME = ebabes

E: NONE

TC-11