


GREENWOOD AVENUE EXISTING TYPICAL SECTION STA. 14+80 TO STA. 31+05±

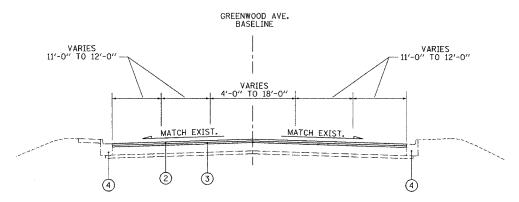


## GREENWOOD AVENUE PROPOSED TYPICAL SECTION STA. 14+80 TO STA. 31+05±

### EXISTING CONDITIONS:

- A HOT-MIX ASPHALT SURFACE AND BINDER COURSE, (3" & VARIES)
- (B) CONTINUOUSLY REINFORCED PORTLAND CEMENT CONCRETE PAVEMENT, 8"
- © PORTLAND CEMENT CONCRETE PAVMENT, 10"
- (D) HOT-MIX ASPHALT BASE COURSE, (DEPTH VARIES)
- E PORTLAND CEMENT CONCRETE BASE COURSE
- F HOT-MIX ASPHALT SUB-BASE, 4"
- G SUB-BASE GRANULAR MATERIAL
- H) HOT-MIX ASPHALT SHOULDERS
- AGGREGATE SHOULDERS
- (J) COMBINATION CONCRETE CURB AND GUTTER
- K BARRIER CURB
- RETAINING WALL


### PROPOSED IMPROVEMENTS:

- 1 HOT-MIX ASPHALT SURFACE REMOVAL, 21/2"
- $\bigcirc$  HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70, (1\sqrt{2}")
- 3 LEVELING BINDER (MACHINE METHOD), N70, (1")
- (4) COMBINATION CONCRETE CURB AND REMOVAL AND REPLACEMENT (AS DETERMINED BY THE ENGINEER)
- 5 AGGREGATE WEDGE SHOULDER, TYPE B

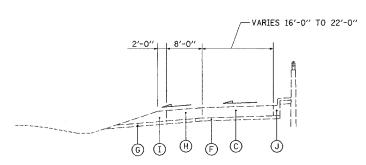

#### EXISTING TYPICAL RAMP SECTION

STA. 50+00± TO STA. 68+00± STA. 103+50± TO STA. 126+00±

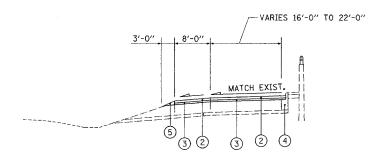

# PROPOSED TYPICAL RAMP SECTION

STA. 50+00± TO STA. 68+00± STA. 103+50± TO STA. 126+00±

