
ENTRANCE APPROACHES - URBAN AREA


			CON	TRA	CT NO.	640	:32
F.A.P. RTE.	SECTION		COUNTY		TOTAL SHEETS	SHEET NO.	
505	110RS-1,	111RS-3	STEPHE	NSON	174	87	
STA. TO STA.							
FED. RO	DAD DIST. NO.	ILLIN	OIS FED.	AID	PROJECT		l

TYPICAL APPLICATION OF ENTRANCES

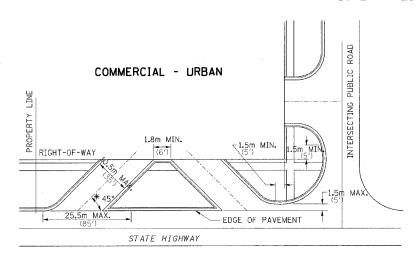


WHEN THE ISLAND BETWEEN DRIVES IS LESS THAN 7.5m (25") LONG OR LESS THAN 10 FEET WIDE, IT SHALL BE DEFINED BY CURBS, MASONRY, OR OTHER DEVICES.

* 45° MIN. ANGLE PERMITTED ONLY FOR ONE-WAY DRIVEWAYS. 60° MIN. ANGLE FOR TWO-WAY DRIVEWAYS.

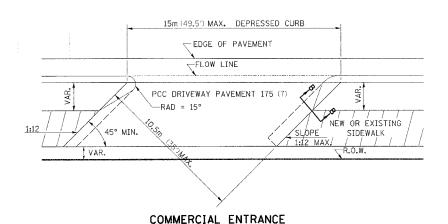



15m (49') DEPRESSED CURB FOR COMMERCIAL ENTRANCE 8m (26') DEPRESSED CURB FOR PRIVATE ENTRANCE

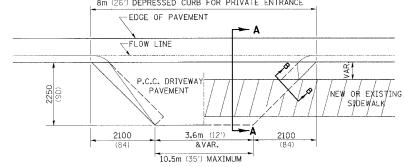



NO SIDEWALK


EXISTING SIDEWALK

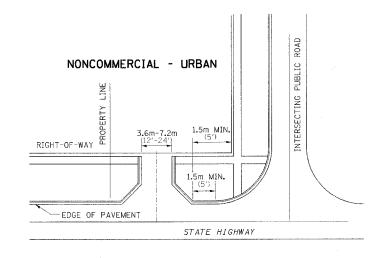

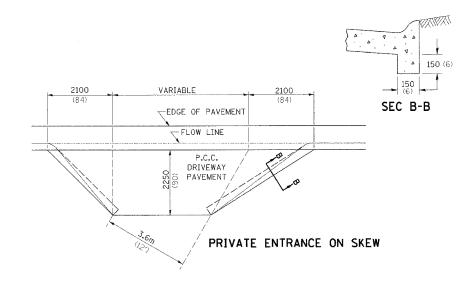


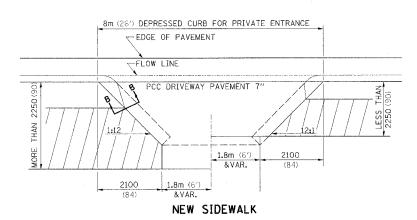

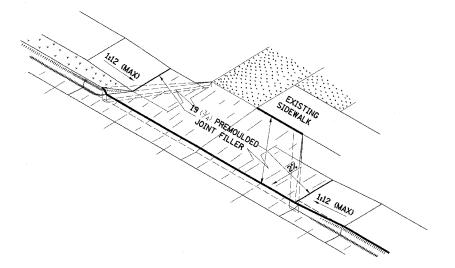




ASCENDING APPROACH



DESCENDING APPROACH

* IN CASES WHERE GRADE EXCEEDS 12%, THE RESIDENT ENGINEER SHALL CHECK WITH DISTRICT DESIGN OFFICE TO DETERMINE NEW APPROACH GRADE, PARTICULAR ATTENTION SHALL BE PAID TO THE NEGATIVE GRADE TO PREVENT DRAINAGE FROM OVER FLOWING INTO THE PRIVATE ENTRANCE.



THE VARIABLE HEIGHT INTEGRAL CURB AND PREMOULDED JOINT FILLER WILL NOT BE PAID FOR SEPARATELY, BUT SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE OF DRIVEWAY PAVEMENT OF THE THICKNESS SPECIFIED.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.