


TO BE USED

STA 420+46.6 TO STA 420+65.5

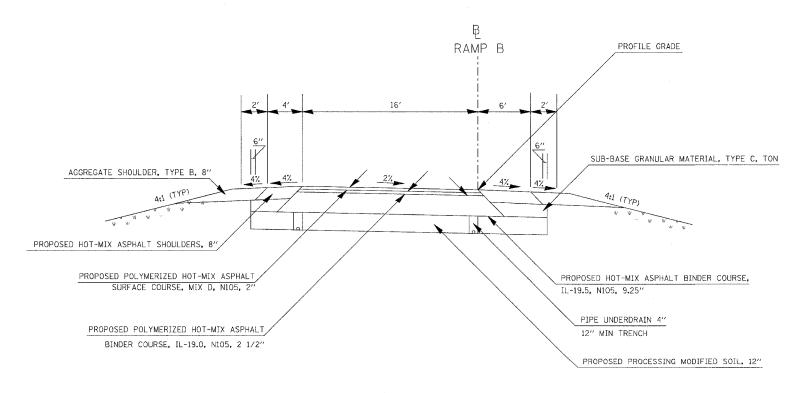

TO BE USED

STA 411+81.17 TO STA 420+46.8

- * THE MINIMUM TRENCH WIDTH FOR PIPE UNDERDRAINS SHALL BE 12"
- * FOR GUARDRAIL LOCATIONS SEE GUARDRAILS SCHEDULE
- * SEE RAMP B CROSS SECTIONS FOR CROSS SLOPES