


STA 513+94.40 TO STA 515+28.63

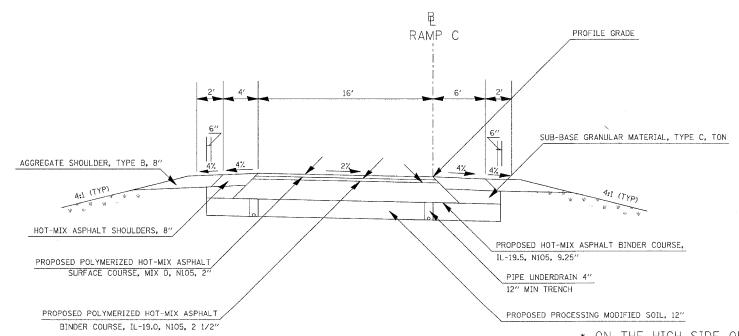

TO BE USED

STA 507+54.98 TO STA 511+34.40

ATTAIN SUPERELEVATION STA 511+34.40 TO STA 513+94.40

REMOVE SUPERELEVATION SEE STANDARD 406001-03

* ON THE HIGH SIDE OF SUPERELEVATED SECTIONS, THE MAXIMUM SHOULDER ROLLOVER SHALL NOT EXCEED 8%

* THE MINIMUM TRENCH WIDTH FOR PIPE UNDERDRAINS SHALL BE 12"

* FOR GUARDRAIL LOCATIONS SEE GUARDRAILS SCHEDULE

* SEE RAMP C CROSS SECTIONS FOR CROSS SLOPES