


TO BE USED

STA 600+71.1 TO STA 603+24.82

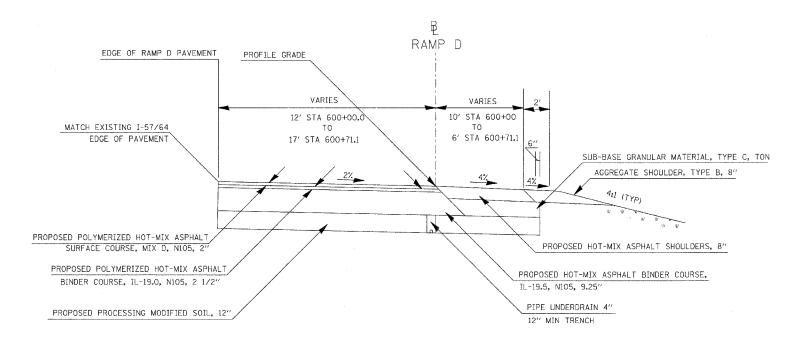

TO BE USED
STA 600+00.0 TO STA 600+71.1

- * THE MINIMUM TRENCH WIDTH FOR PIPE UNDERDRAINS SHALL BE 12"
- * FOR GUARDRAIL LOCATIONS SEE GUARDRAILS SCHEDULE
- * SEE RAMP D CROSS SECTIONS FOR CROSS SLOPES