


TO BE USED

STA 608+30.69 TO STA 616+53.4

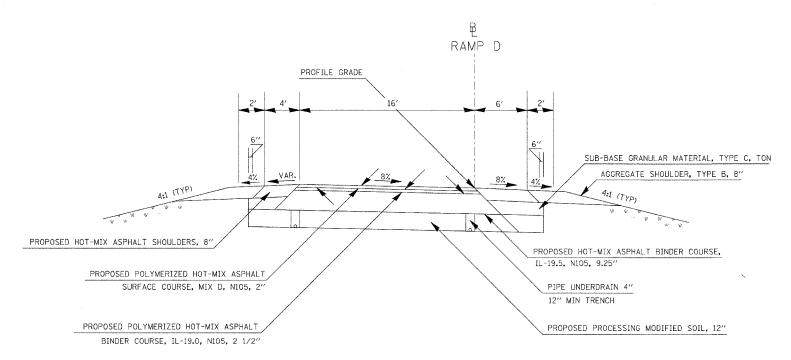

ATTAIN SUPERELEVATION SEE STANDARD 406101-02

REMOVE SUPERELEVATION
STA 605+70.69 TO STA 608+30.69

TO BE USED

STA 605+24.82 TO STA 605+70.69

- * ON THE HIGH SIDE OF SUPERELEVATED SECTIONS, THE MAXIMUM SHOULDER ROLLOVER SHALL NOT EXCEED 8%
- * THE MINIMUM TRENCH WIDTH FOR PIPE UNDERDRAINS SHALL BE 12"
- * FOR GUARDRAIL LOCATIONS SEE GUARDRAILS SCHEDULE
- * SEE RAMP D CROSS SECTIONS FOR CROSS SLOPES

TYPICALS RAMP-D

E NAME = IA98jobs/98s2019s/IDOT RAMPS/typicels.m32 T SCALE = 5.2000 // IN.