

STEEL POST CONSTRUCTION







Plate A shall be placed between rail element and block-out at non-splice mounting points only when steel block-outs are used.

PLATE A



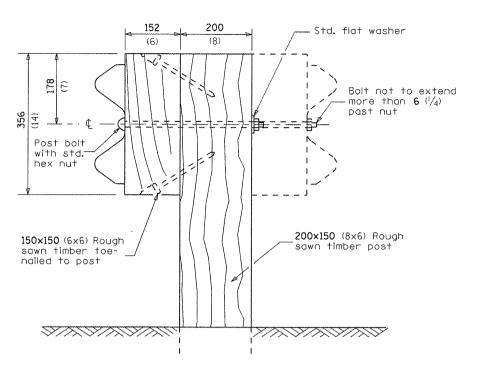

WOOD POST CONSTRUCTION

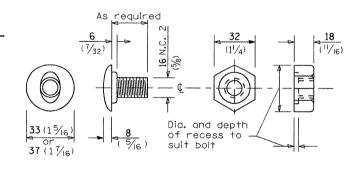

POST OR SPLICE BOLT & NUT

- 1				
-	FILE NAME =	USER NAME = quigleyml	DESIGNED -	REVISED -
١	\pw_work\pwidot\quigleyml\d0300564\D366Cl8-sht-deteils.dgn		DRAWN -	REVISED -
١		PLOT SCALE = 100.0000 '/ in.	CHECKED -	REVISED -
ı		PLOT DATE = 3/26/2012	DATE -	REVISED -

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

PRE-MGS EFFECTIVE 4-1-06	
STEEL PLATE BEAM GUARDRAI	L
STANDARD 630001-06	(Sheet 2 of 4)
SHEET NO. OF SHEETS STA.	TO STA.

- D-3 HIGHWAY DAMAGE REPAIR 2013

A. SECTION COUNTY TOTAL SHEET NO.

RR. • VAR. 37 | 18

CONTRACT NO. 66C18

D. ROAD DIST. NO. | ILLINOIS|FED. AID PROJECT