

NOTES

Detail I - With Bar Splicer or Couplers: Connect one (1) I''xI'''xIO'' steel I to the top layer of couplers with $2^{-5}g''$ ϕ bolts

screwed to coupler at approximate © of each barrier panel.

Detail II - With Extended Reinforcement Bars:

Connect one (1) 1''x7''x 10'' steel \(\begin{align*} \) to the concrete slab or concrete wearing surface with 2-\(5_8'' \) \(\text{Expansion Anchors or cast in place inserts } \) spaced between the top layer of reinforcement at approximate \(\begin{align*} \) of each barrier panel. \(\text{Align*} \)


Cost of anchorage is included with Temporary Concrete Barrier.


The I'' x 7'' x 10'' plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

SECTIONS THRU SLAB OR DECK BEAM

- *** Dimension shown is minimum required embedment into concrete.

 If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.
- **** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

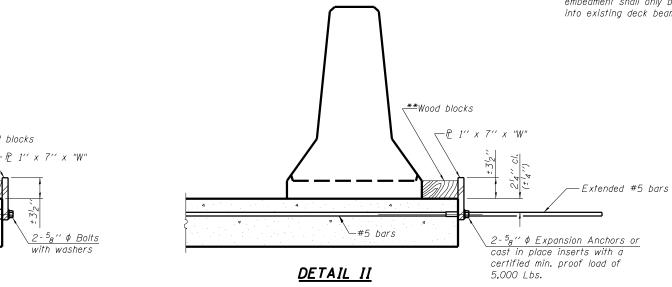



STEEL RETAINER P 1" x 7" x 10"

* Required only with Detail II

** Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"

R-27

11-1-09

DETAIL I

**Wood blocks

Top Layer Splicer

FILE NAME =	USER NAME = huffm00028	DESIGNED - BDC	REVISED -		TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION	F.A.P. RTF.	SECTION	COUNTY	TOTAL SHEET
0760028-78I34.dgn		CHECKED - MNM	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	STRUCTURE NO. 076-0028	132	103B-1	Pope	52 29
	PLOT SCALE =	DRAWN - DAB	REVISED -					CONTRACT NO. 78134	
	PLOT DATE = 02\22\2012	CHECKED - TEH	REVISED -		SHEET NO. 5 OF 28 SHEETS	ILLINOIS FED. AID PROJECT		D PROJECT	