


DETAIL A

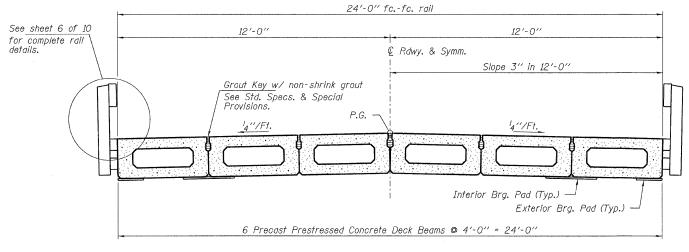

CROSS SECTION
See sheets 3 & 4 for Superstructure.

SECTION AT ABUTMENTS

Hatched area to be poured after beams are in place. $2\frac{1}{2}$ " x 1" Prem. Jt. Filler full width of bridge.

1" Fabric Brg. Pad

I" φ x 2'-6" Dowel Rods

After beams are in place drill
12" φ holes in cap & grout
dowel rods in place.
Rods to be grouted and
allowed to cure (Min. 24 Hrs.)
prior to grouting shear keys.

STATE OF ILLINOIS CLAY COUNTY HIGHWAY DEPARTMENT
 SUPERSTRUCTURE DETAILS
 T.R.

 STRUCTURE NO. 013–3238
 355 07-1

 SHEET NO. 5 OF 11 SHEETS
 STANFORD ROAD