



Roma (Botts) c'i rentro c'il ritr 1430 (T P.C.C. DRIVEWAY PAVEMENT DETAIL

FOR INFORMATION ONLY

SECTION COUNTY STORM COUNTY STO

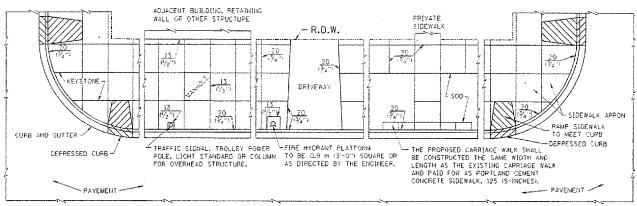

NOTES:



SLOPE FOR SIDEWALK 25 (1") IN 0.9 m (3"-0") IN CHICAGO ONE-HALF INCH THICK EXPANSION JOINTS SHALL BE PLACED BETWEEN THE SIDEWALK AND
ALL STRUCTURES SUCH AS LIGHT STANDARDS, TRAFFIC LIGHT STANDARDS, MANHOLES. WHICH
EXTEND THROUGH THE SIDEWALK.
 20 13/4) THICK EXPANSION JOINTS SHALL BE PLACED AT INTERVALS OF NOT MORE
THAN 30 METERS (100 FEET) IN THE SIDEWALK. WHERE THE SIDEWALK IS CONSTRUCTED ADJA

THAN 30 METERS (100 FEET) IN THE SIDEWALK. WHERE THE SIDEWALK IS ON STRUCTED ADJACENTTO PAVEMENT OR CURB HAVING EXPANSION JOINTS, THE EXPANSION JOINTS IN THE SIDEWALK
SHALL BE PLACED OPPOSITE THE EXISTING EXPANSION JOINTS AS NEARLY AS PRACTICABLE.
EXPANSION JOINTS SHALL ALSO BE PLACED WHERE THE SIDEWALK ABUTS EXISTING SIDEWALKS,
BETWEEN DRIVEWAY PAVEMENT AND SIDEWALK, AND BETWEEN SIDEWALK AND CURBS WHERE THESIDEWALK ABUTS A CURB.

PORTLAND CEMENT CONCRETE SIDEWALK DETAILS

