

F.A.P. RTE.	SECTION	COUNTY		TOTAL SHEE	
351	3277R	COO	соок		148
STA.		TO STA.			
FED. ROAD	DIST. NO.	ILLINOIS	FED.	AID PROJ	ECT

CONTRACT NO. 60774

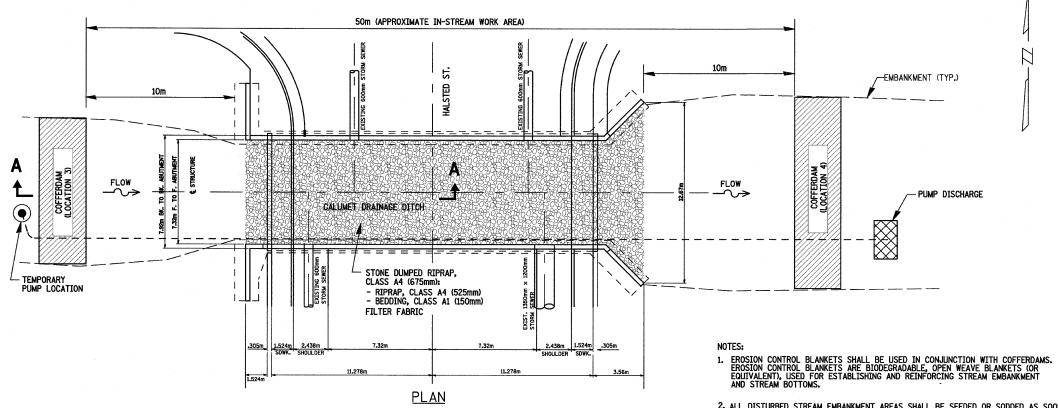

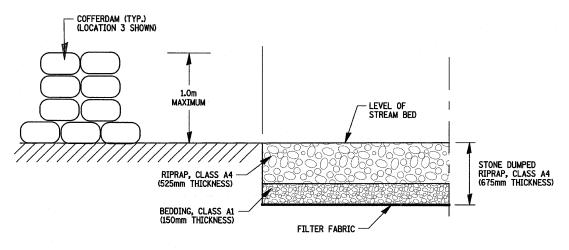

SECTION A-A

ALL DISTURBED STREAM EMBANKMENT AREAS SHALL BE SEEDED OR SODDED AS SOON AS PRACTICAL AFTER CONSTRUCTION ACTIVITIES IN THAT AREA HAVE CONCLUDED.

3. PUMP(S) SHALL BE USED FOR DIVERTING THE WATER THROUGH THE IN-STREAM WORK AREA AND FOR DEWATERING THE WORK AREA. WATERS FROM COFFERDAM AND PUMPING SHALL BE DISCHARGED INTO A SETTLING BASIN/TANK OR SUITABLE DEWATERING FILTER BAG. NO ADDITIONAL COMPENSATION WILL BE PAID FOR PUMPING OR SETTLING BASINS OR FILTER BAGS.

4. EROSION CONTROL MEASURES WILL BE INSPECTED BY THE ENGINEER PERIODICALLY AND WITHIN 24 HOURS OF ANY STORM EXCEEDING $\frac{1}{2}$ INCH PRECIPITATION. DAMAGED AND INEFFECTIVE EROSION CONTROL MEASURES SHALL BE REPAIRED OR REPLACED AS SOON AS POSSIBLE.

5. ALL EROSION CONTROL MEASURES SHALL BE KEPT OPERATIONAL AND MAINTAINED CONTINUOUSLY THROUGHOUT THE PERIOD OF LAND DISTURBANCE UNTIL PERMANENT SEDIMENT AND EROSION CONTROL MEASURES ARE OPERATIONAL.

6. THE COFFERDAMS SHALL NOT BE EARTHEN OR USE ANY PRACTICES THAT WOULD RESULT IN A RELEASE OF SEDIMENT INTO WATERS OF THE U.S. COFFERDAMS SHALL BE CONSTRUCTED OF NON-ERODABLE MATERIALS. ACCEPTABLE PRACTICES INCLUDE PRE-FABRICATED RIGID COFFERDAMS, SHEET PILING, INFLATABLE BLADDERS, SANDBAGS AND FABRIC-LINED BASINS.

DEVICTORS			***************************************		
REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATI			
NAME	DATE	101010	ANTIMENT OF	THATOI ON TATION	
		US RTE (5 FROM I-29	4 TO IL RTE 1	
		С	ONSTRUCTION	ION AND	
		EROSION CONTROL DETAIL			
		ЦАІ	STED ST. A	T CHOO	
		HAL	.31EU 31. A	1 6.0.0.0.	
		DU-52		DRAWN BY MRF	
		DATE 01/28/09)	CHECKED BY JRP	

100 S. WACKER DR., SUITE 500 CHICAGO, ILLINOIS 60606 TEL. (312) 939-1000 FAX (312) 939-4198