

PROP. PAY LIMIT OF BIT. SURF. REMOVAL FULL THICKNESS OF MILLING TEMP, RAMP (NOTE "E") PROP. BIT. SURFACE REMOVAL EXIST. PAVEMENT MILLED TEMPORARY RAMP (FOR BUTT JOINT AND BIT. TAPER SEE DETAIL BELOW) OPTION 1 PROP. PAY LIMIT OF BIT. SURF. REMOVAL FULL THICKNESS OF MILLING SAW CUT (INCLUDED IN THE COST TEMP. RAMP OF BITUMINOUS SURFACE REMOVAL - BUTT JOINT) PROP. BIT. SURFACE REMOVAL-(NOTE "E") _45 (1 3/4) FOR E AND F MIX 40 (1 1/2) FOR C AND D MIX 1.35 m (4.5') PAY LIMIT FOR BUTT JOINT EXIST. BIT. SURF. EXIST. PAVEMENT BITUMINOUS CONSTRUCTED TEMPORARY RAMP (FOR BUTT JOINT AND BIT. TAPER SEE DETAIL BELOW) OPTION 2 TYPICAL TEMPORARY RAMP BIT, TAPER LENGTH *** SAW CUT (INCLUDED IN THE COST OF BITUMINOUS SURFACE REMOVAL - BUTT JOINT) PROP. BIT. SURF. CRSE. PROP. BIT. BINDER CRSE. 1.35 m (4.5') VARIES _ 45 (1 3/4) FOR E AND F MIX 40 (1 1/2) FOR C AND D MIX PAY LIMIT FOR BUTT JOINT (NOTE "D") EXIST. BIT. SURF. EXIST. PAVEMENT - BIT. SURF, REMOVAL - BUTT JOINT BUTT JOINT AND BITUMINOUS TAPER BASIS OF PAYMENT: THE BUTT JOINT WILL BE PAID FOR PER SQUARE METER (SQUARE YARD.) AS "BITUMINOUS SURFACE REMOVAL - BUTT JOINT" OR AS "PORTLAND CEMENT CONCRETE SURFACE REMOVAL- BUTT JOINT". TYPICAL BUTT JOINT AND BITUMINOUS TAPER FOR MILLING AND RESURFACING

SECTION COUNTY TOTAL SHEETS SHEET 3520 2005-001 RS COOK 37 TO STA. FED. ROAD DIST. NO. ! SLLINOIS FEO. AID PROJECT

CONTRACT NO. 62903

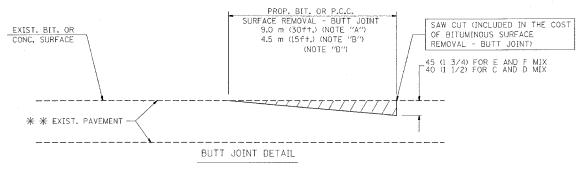

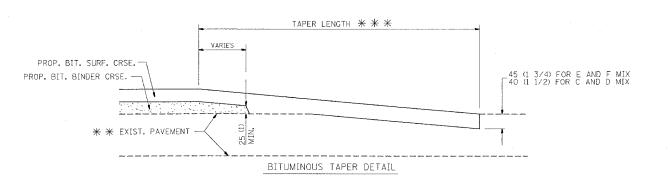

TYPICAL BUTT JOINT AND BITUMINOUS TAPER FOR RESURFACING ONLY

* * PC CONCRETE, BITUMINOUS OR BITUMINOUS RESURFACED PAVEMENT.

NOTES

A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.

B: MINOR SIDE ROADS.

C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING BITUMINOUS SURFACE.

D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED BITUMINOUS COURSES.

E: TAPER THE TEMP, RAMP AT A RATE OF 900 (3 ft.) PER INCH OF MILLING THICKNESS.

F: INSTALLATION AND REMOVAL OF THE 1.35 m (4.5') TEMP. BIT. RAMP WILL BE PAID AS "BITUMINOUS SURFACE REMOVAL - BUTT JOINT".

G: SEE ARTICLE 406.18 AND 406.24 OF THE STANDARD SPECIFICATIONS FOR "BITUMINOUS AND PCC SURFACE REMOVAL, BUTT JOINT".

* SEE TYPICAL SECTIONS FOR MILLING THICKNESS.

* * * 6.1 m (20') PER 25 (1) RESURFACING (NOTE "A") 3.0 m (10') PER 25 (1) RESURFACING (NOTE "B") ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.

ILLINOIS DEPARTMENT OF TRANSPORTATION

BUTT JOINT AND BITUMINOUS TAPER DETAILS

SCALE: NONE

R. SHAH A. ABBAS

04/06/01 DATE PLOTTED:10/3/2005

CHECKED BY BD400-05 (VI=BD32)

REVISION DATE: 04/06/01

.\distatd\bd32.dyn = 10/3/2006 4:07.18 PM User-wilgreendp

IO/3/2005 W:\diststd\bd32.dgn VI=BD32