
F.	A.U. TE.	SECTION		COUNT	Υ	TOTAL SHEETS	SHEET NO.
03	369 97-	00025-0	O-BR	WILL		156	138
S.	TA.		TO	STA.			
FE	D. ROAD I	IST. NO.	ILL INOIS	FED.	AID	PROJECT	

CONTRACT NO: 83757

—Ties at 4'-0" cts. Stage Construction Joint Finishing machine rail-Hardwood 4" x 4" blocks at 4'-0" cts.

FORM BRACES FOR STAGE CONSTRUCTION

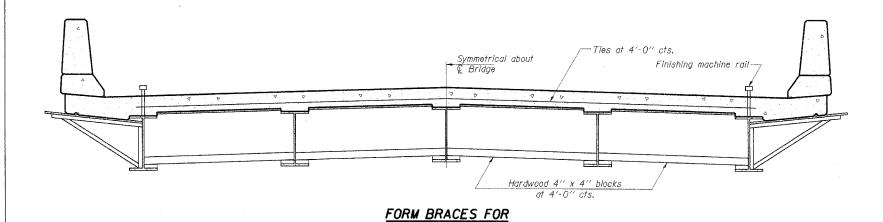

STANDARD CONSTRUCTION

When cantilever forming brackets are used, the work shall be done according to Article 503.06, except as modified below and in the details shown on this sheet.

The finishing machine rails shall be placed on the top flange of the exterior beams.

The beams or girders, supporting cantilever forming brackets, shall be field together at 4 foot intervals.

For Standard construction, or Stage Construction the Hardwood bracing materials shall be placed as shown between webs of beams in each bay.

SHT. S-29 REVISIONS NAME

VILLAGE OF NEW LENOX F.A.U. (0369) CEDAR ROAD OVER HICKORY CREEK WILL COUNTY

CANTILEVER FORMING BRACKETS FOR SUPERSTRUCTURES WITH W27 BEAMS AND SMALLER

SCALE: NO SCALE DATE: 07/01/05

DRAWN BY: FZD CHECKED BY: KPS

TENG

SB-1 9-01-03