


# ELECTRICAL SERVICE - PANEL DIAGRAM (TYPICAL FOR POLE AND GROUND MOUNTED SERVICE) SERVICE INSTALLATION POLE MOUNT (SHOWN)

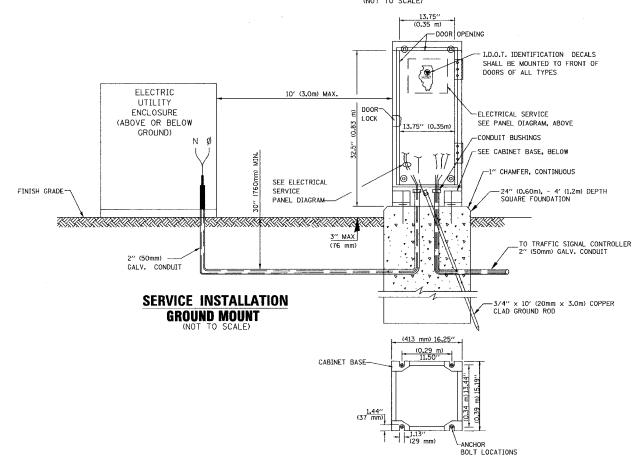

CABINET - BASE BOLT PATTERN

CONSTRUCTED TO U.L. STD 508,
RY THE U.L. LABEL.

D AND SUPPORTED.

CAST CORNER FRAME WEB


UL LISTED GROUND
COMPRESSION CONNECTOR

ANTI-CORROSION COMPOUND
SHALL BE APPLIED ON ALL
EAKER


BOLT/ CONNECTION ASSEMBLIES.

DETAIL "A"

-STAINLESS STEEL NUT AND 2 STAINLESS



# DETAIL "B"

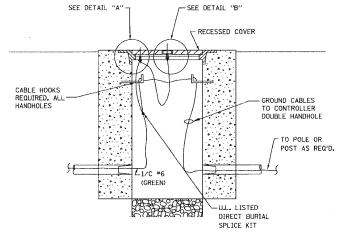

## HANDHOLE COVER & FRAME - GROUNDING DETAIL

(NOT TO SCALE)

EXISTING HANDHOLE COVER & FRAME - GROUNDING DETAIL

(NOT TO SCALE)

#### NOTES:


# GROUNDING SYSTEM

| F.A.U. | SECTION | COUNTY | TOTAL | SHEET | NO. | 3809 | 05-00050-00-CH | DUPAGE | 36 | 35 | STA. | TO STA. | TO STA. | FED. ROAD DIST. NO. 7 | ILLINOIS | FED. AID | PROJECT | F-0021068)

CONTRACT NO. 8385

- 1. THE GROUNDING SYSTEM SHALL CONSIST OF AN INSULATED CONDUCTOR TYPE XLP, NO. 6 A.W.G., STRANDED COPPER TO BE INSTALLED IN RACEWAYS. THE GROUNDING CABLE SHALL BE INSTALLED

  IN A CONTINUOUS MANNER AS SHOWN ON THE CABLE PLAN PROVIDED. ALL GROUNDING CONDUCTORS SHALL BE BONDED TO METAL ENCLOSURE (HANDHOLE, POST, MAST ARM, CONTROLLER, ETC.). GROUND ROD SHALL BE 3/4" DIA. × 10"-0" (20mm × 3.0m) LONG, COPPER CLAD. ONE GROUND ROD SHALL BE INSTALLED AT ALL POST FOUNDATIONS, POLE FOUNDATIONS, CONTROLLER CABINET FOUNDATION AND ELECTRICAL SERVICE INSTALLATION AS INDICATED ON THE CABLE PLAN. IF THERE ARE ANY SPECIAL CONDITIONS SUCH AS SUB-SURFACE CONDITIONS OR INSTALLATION PROBLEMS, THE RESIDENT ENGINEER SHALL BE NOTIFIED OR CONTACT THE BUREAU OF TRAFFIC, ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT ONE AT (947) 705-4139.
- THE NEUTRAL CONDUCTOR AND THE GROUND CONDUCTOR SHALL BE CONNECTED IN THE SERVICE INSTALLATION. AT NO OTHER POINT IN THE TRAFFIC SIGNAL SYSTEM SHALL THE NEUTRAL AND GROUND CONDUCTORS BE CONNECTED.
- ALL EQUIPMENT GROUNDING CONDUCTORS SHALL TERMINATE AT THE GROUND BUS IN THE CONTROLLER CABINET.
- 4. THE CONTRACTOR SHALL PROVIDE A GROUND CABLE WITH CONNECTORS BETWEEN THE HANDHOLE COVER AND HANDHOLE FRAME.






HEAVY-DUTY COMPRESSION TERMINAL (BURNDY TYPE YGHA OR APPROVED EQUAL)

3/4" (20mm) HEAVY-DUTY GROUND ROD CLAMP (BURNDY TYPE GRC OR APPROVED EUAL)

### NOTES:

- ALL CLAMPS SHALL BE BRONZE OR COPPER, UL APPROVED.
- GROUND CABLE SHALL BE LOOPED OVER HOOKS IN THE HANDHOLES 6.5' (2.0m) SLACK SHALL BE PROVIDED IN SINGLE HANDHOLES 13' (4.0m) OF SLACK SHALL BE PROVIDED IN DOUBLE HANDHOLES. 5' (1.4m) OF SLACK SHALL BE PROVIDED BETWEEN FRAME AND COVER.

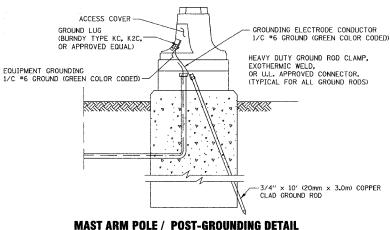

(NOT TO SCALE)

		ILLINOIS DEPARTMENT	UE TENNICHUEL VILLE
NAME	DATE	TEETHOIS DEL ARTIMENT	OF TRANSPORTATION
		DISTRIC	CT 1
		STANDARD TRAF	1 10 01011/10
		DESIGN DE	ETAILS
		SCALE: VERT, NONE	DRAWN BY: RWP DESIGNED BY: DA

SCALE: VERT. NONE
HORIZ.
DATE 1-01-02

DRAWN BY: RWP DESIGNED BY: DAD CHECKED BY: DAZ SHEET 3 OF 4