

PAVEMENT PATCHING (INCIDENTAL TO REMOVAL AND RECONSTRUCTION OF STRUCTURES)

N.T.S.

PROPOSED DRIVEWAY
PREFORMED PAVEMENT (SEE NOTE 1)
EXPANSION JOINT FILLER
(P.C.C. DRIVEWAYS ONLY)

8.0% MAX.

2.0% MAX.

EXIST.
R.O.W. LIN
YARIES
1' MIN.

EXISTING DRIVEWAY
1' MIN.


EXISTING DRIVEWAY
APRON TO BE REMOVED
EXPANSION JOINT FILLER
(P.C.C. DRIVEWAYS ONLY)

PROPOSED COMBINATION
CONCRETE CURB AND GUTTER
TYPE B-6.12 (DEPRESSED AT
DRIVEWAY)

OTES:

- THE PROPOSED DRIVEWAY PAVEMENT SHALL CONSIST OF:
 A) 7" PORTLAND CEMENT CONCRETE AND 4" OF AGGREGATE BASE COURSE TYPE B
 IF THE EXISTING DRIVEWAY IS P.C. CONCRETE, OR
- 2. PREFORMED EXPANSION JOINT FILLER SHALL BE CONSIDERED INCIDENTAL TO P.C.C. DRIVEWAY PAVEMENT, OR


SECTION
TYPICAL DRIVEWAY DETAILS

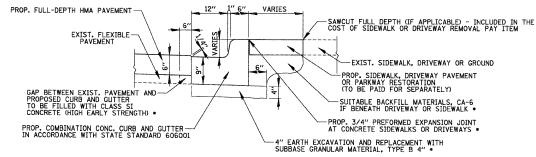

NOTE: LONGITUDINAL BARS, IF ENCOUNTERED IN THE EXISTING CURB OR CURB AND GUTTER, ARE NOT TO BE REPLACED. CUTTING AND REMOVING LONGITUDINAL BARS SHALL BE INCLUDED IN THE COST OF CURB REMOVAL OR CURB AND GUTTER REMOVAL.

 INCLUDED IN THE COST FOR COMBINATION CONCRETE CURB AND GUTTER

COMBINATION CURB AND GUTTER ADJACENT TO EXIST. PAVEMENT AND/OR SIDEWALK N.T.S




* CROSS SLOPE 2% OR AS SHOWN ON CROSS SECTIONS

NOTES:

- 1. ALL REQUIRED EARTH EXCAVATION TO CONSTRUCT P.C.C. SIDEWALK SHALL BE INCIDENTAL TO THE P.C.C. SIDEWALK 5 INCH, SPECIAL.
- 2. THICKNESS SHALL BE INCREASED TO 7" WHERE SIDEWALK IS ADJACENT TO A CONCRETE DRIVEWAY. (COST INCIDENTAL)


P.C.C. SIDEWALK 5 INCH, SPECIAL N.T.S.

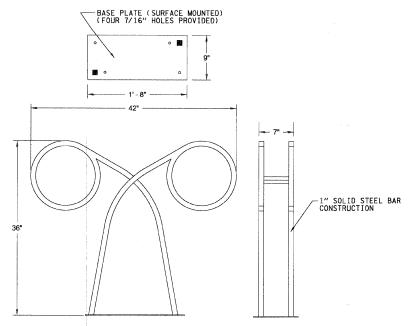


NOTES: (1) IRONSMITH CASIS MODEL BR1 BIKE RACK OR APPROVED EQUAL.

(2) PRIDE TO GRDERING, CONTRACTOR SHALL SUBMIT MANUFACTURER'S
TECHNICAL DATA, INCLUDING CERTIFICATION THAT EACH PRODUCT
COMPLIES WITH THE SPECIFIED REQUIREMENTS. SUBMITTAL MUST
SHOW COMPLETE DIMENSIONING AS WELL AS THE ANCHORING DETAIL.


BICYCLE RACKS DETAIL
N.T.S.

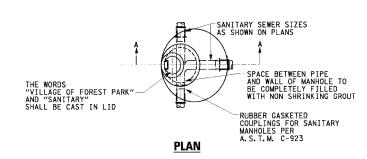

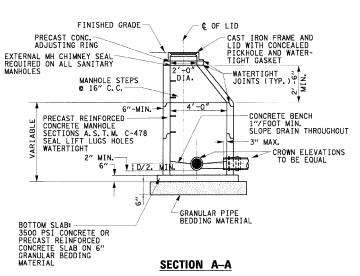

STANDARD SANITARY MANHOLE

N.T.S.



NOTE: 1. PLACE 3/4" EXPANSION JOINTS AT 40' CENTERS.

WALL DETAIL N.T.S.

FILE NAME =	USER NAME = JBARNETT	DESIGNED ~	REVISED -			······································			F.A.U.	SECTION	COUNTY	TOTAL SHEET	
N:\FORESTPARK\070082\C1v1\DET_070082_0	LSHT	DRAWN -	REVISED -	STATE OF ILLINOIS	CONSTRUCTION DETAILS – HARVARD STREET			STREET	1702	07-00106-00-PV	COOK	SHEETS NO.	
	PLOT SCALE = N.T.S.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION						1102	07-00106-00-1 V	CONTRAC	T NO 63148
	PLOT DATE = 2/18/2009	DATE -	REVISED -		SCALE:	SHEET NO. OF	SHEETS	STA.	TO STA.	FED. RO	AD DIST. NO. 1 ILLINOIS FED.	AID PROJECT	1 110: 03110