

**70400100 TEMPRARY CONCRETE BARRIER**

	STATION	STATION	FOOT
<b>STAGE I CONSTRUCTION</b>			
<b>NORTHBOUND</b>			
TANGENT	190+83.16	196+20.66	537.5
TAPER	188+33.16	190+83.16	250.0
<b>SOUTHBOUND</b>			
TANGENT	190+11.72	195+49.22	537.5
TAPER	195+49.22	197+99.22	250.0
<b>TOTAL =</b>			<b>1575.0</b>

**70400200 RELOCATE TEMPORARY CONCRETE BARRIER**

	STATION	STATION	FOOT
<b>STAGE II CONSTRUCTION</b>			
<b>NORTHBOUND</b>			
TANGENT	190+83.16	196+20.66	537.5
TAPER	189+08.16	190+83.16	175.0
<b>SOUTHBOUND</b>			
TANGENT	190+11.72	195+49.22	537.5
TAPER	195+49.22	197+24.22	175.0
<b>TOTAL =</b>			<b>1425.0</b>

PLAN NOTES:

ALL STAGING DETAILS SET UP IN ACCORDANCE WITH TRAFFIC CONTROL AND PROTECTION 701423.

PRIOR TO BARRIER PLACEMENT TRAFFIC CONTROL SHALL BE SET UP IN ACCORDANCE WITH STANDARD 701422.

TRAFFIC CONTROL DETAILS NOT SHOWN ARE TO CONFORM WITH STANDARD 701201 AND 701422.

MESSAGE BOARD SHALL BE PLACED TWO WEEKS PRIOR TO CONSTRUCTION AND MAY BE ADJUSTED TO MEET FIELD CONDITIONS.


RESIDENT ENGINEER AND TRAFFIC CONTROL SUPERVISOR SHALL PROVIDE APPROPRIATE MESSAGE FOR CMS.

RAISED REFLECTIVE PAVEMENT MARKERS AFFECTED BY THE PROPOSED CONSTRUCTION SHALL BE REPLACED. THIS COST SHALL BE INCIDENTAL TO THE VARIOUS TRAFFIC CONTROL PAY ITEMS.

REFLECTORS AND VERTICAL PANELS FOR BARRIER WALL, BRIDGE RAIL AND GUARDRAIL SHALL BE INCLUDED IN THE COST FOR THE APPLICABLE TRAFFIC CONTROL PAY ITEMS.

ATTACH VERTICAL PANELS TO THE LEFT GUARDRAIL AT 25 FOOT CENTERS DURING STAGE II. THIS COST WILL BE INCIDENTAL TO STANDARD 701423.

REFLECTORIZED TEMPORARY MARKING TAPE SHALL BE PLACED THROUGHOUT THE TAPER AND ALONG-SIDE THE WORK AREA. THE EDGE LINE SHALL BE YELLOW FOR LEFT LANE CLOSURES. COST FOR THE PLACEMENT AND REMOVAL SHALL BE INCLUDED IN COST FOR APPLICABLE TRAFFIC CONTROL PAY ITEM.

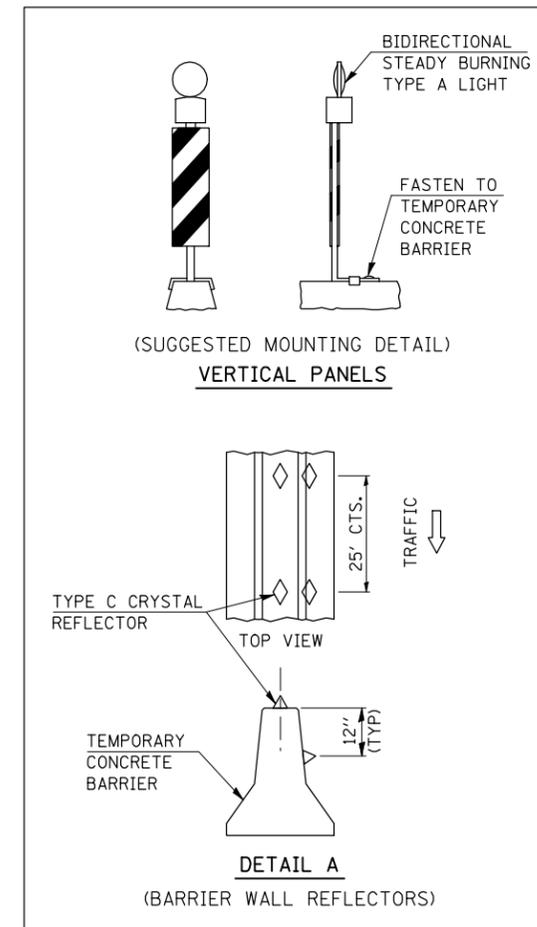

FILE NAME =	USER NAME = shererjm	DESIGNED - JMS	REVISED -
ct:\pw\work\p\dot\shererjm\dms83928\70781Summary.dgn		DRAWN - JMS	REVISED -
		CHECKED - JMS	REVISED -
		DATE - 090308	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**SCHEDULE OF QUANTITIES/PLAN NOTES**

SCALE: N/A SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
676	(9-1)BJR	MCLEAN	17	5
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT			CONTRACT NO. 70731	