


W12-2(0) - 48"x48" (1200x1200)


SIGN (A) 2 SIGNS - W12-2(0) - 48"x48" (1200x1200) ARE TO BE PLACED AT EACH END OF THE REPAIR IN EACH DIRECTION ALONG ROUTE \*.

SIGN (B) 2 SIGNS - (SIGN PANEL, TYPE II) AS SHOWN ARE TO BE PLACED APPROXIMATELY \* MILES EACH SIDE OF THE PROJECT ON ROUTE \*.

\* TO BE DETERMINED BY TRAFFIC CONTROL SUPERVISOR PRIOR TO CONSTRUCTION.

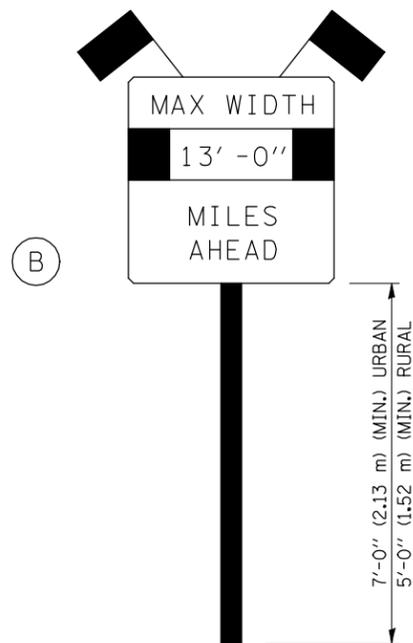

SIGN PANEL, TYPE II

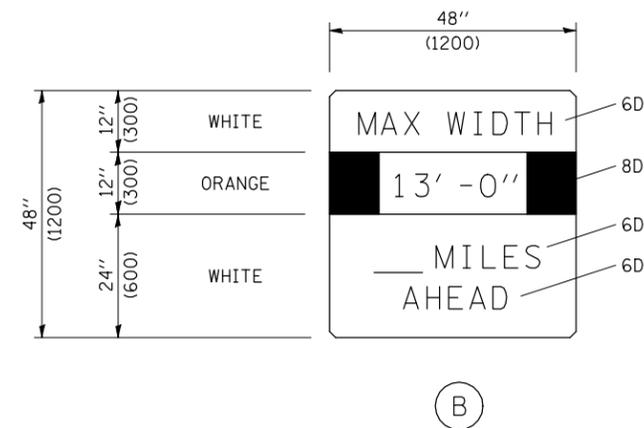

GENERAL NOTES

1. ALL TRAFFIC CONTROL DEVICES SHALL BE FURNISHED, ERECTED AND MAINTAINED BY THE CONTRACTOR.
2. ALL (B) SIGNS SHALL HAVE FLAGS INSTALLED UNLESS OTHERWISE DIRECTED.
3. LOCATIONS OF TRAFFIC CONTROL DEVICES MAY BE ADJUSTED BY THE ENGINEER.
4. ALL TRAFFIC CONTROL SHOWN ON THIS SHEET SHALL BE PAID FOR AT THE CONTRACT LUMP SUM PRICE FOR WIDTH RESTRICTION SIGNING.
5. THE ILLINOIS DEPARTMENT OF TRANSPORTATION WILL SUPPLY ALL "ROUTE MARKER" SIGNS, IF APPLICABLE. THE CONTRACTOR SHALL NOTIFY THE DISTRICT BUREAU OF OPERATIONS A MINIMUM OF 10 WORKING DAYS PRIOR TO PLACEMENT OF WIDTH RESTRICTION SIGNING TO ENSURE AVAILABILITY OR FABRICATION OF THE "ROUTE MARKER" SIGNS.
6. ALL SIGNS SHALL BE POST MOUNTED UNLESS OTHERWISE DIRECTED.
7. ALL SIGNS SHOWN ORANGE (O) SHALL BE FLUORESCENT ORANGE.

FILE NAME =	USER NAME = shererjm	DESIGNED - JMS	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>WIDTH RESTRICTION SIGNING</b>			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
ct:\pw\work\p\dot\shererjm\dms83928\70781Details.dgn	DRAWN - JMS	REVISIED -			676	(9-1)BJR	MCLEAN	17	11			
PLOT SCALE = 100.0000' / IN.	CHECKED -	REVISIED -			CONTRACT NO. 70731			FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		
PLOT DATE = 1/28/2009	DATE - 01/05/09	REVISIED -			N/A	SHEET NO. 1 OF 1 SHEETS	STA. N/A TO STA. N/A					