



Illinois Department of Transportation

2300 South Dirksen Parkway / Springfield, Illinois / 62764

April 8, 2009

SUBJECT: FAP Route 310 (IL 255)
Project ESP-0310 (130)
Section 60-15-1, 60-15HB-1
Madison County
Contract No. 76635
Item No. 238, April 24, 2009 Letting
Addendum A

NOTICE TO PROSPECTIVE BIDDERS:

Attached is an addendum to the plans or proposal. This addendum involves revised and/or added material.

1. Revised pages ii and iii of the Table of Contents to the Special Provisions.
2. Revised pages 39 - 42 of the Special Provisions.
3. Added pages 158 - 163 to the Special Provisions.

Prime contractors must utilize the enclosed material when preparing their bid and must include any Schedule of Prices changes in their bidding proposal.

Bidders using computer-generated bids are cautioned to reflect any and all Schedule of Prices changes, if involved, into their computer programs.

Very truly yours,

Charles J. Ingersoll, Chief
Bureau of Design and Environment

A handwritten signature in cursive script, reading "Ted B. Walschleger P.E.".

By: Ted B. Walschleger, P. E.
Engineer of Project Management

cc: Mary C. Lamie, Region 5, District 8; Bill Frey; R. E. Anderson; Estimates

TBW:DB:jc

ALKALI-SILICA REACTION FOR PRECAST AND PRECAST PRESTRESSED CONCRETE (BDE)	43
APPROVAL OF PROPOSED BORROW AREAS, USE AREAS, AND/OR WASTE AREAS INSIDE ILLINOIS STATE BORDERS (BDE)	45
BUILDING REMOVAL - CASE II (NON-FRIABLE ASBESTOS ABATEMENT) (BDE)	45
BUILDING REMOVAL: NON-FRIABLE	52
APPENDIX D	76
BUILDING REMOVAL - CASE IV (NO ASBESTOS) (BDE).....	78
BUILDING REMOVAL; NO ACM	80
CEMENT (BDE)	87
CONCRETE ADMIXTURES (BDE)	89
CONSTRUCTION AIR QUALITY – DIESEL VEHICLE EMISSIONS CONTROL (BDE).....	92
CONSTRUCTION AIR QUALITY - IDLING RESTRICTIONS (BDE).....	93
DETERMINATION OF THICKNESS (BDE).....	95
DISADVANTAGED BUSINESS ENTERPRISE PARTICIPATION (BDE)	105
DOWEL BARS (BDE)	112
ENGINEER’S FIELD OFFICE TYPE A (BDE)	112
EPOXY PAVEMENT MARKINGS (BDE).....	114
EQUIPMENT RENTAL RATES (BDE).....	116
FLAGGER AT SIDE ROADS AND ENTRANCES (BDE)	117
HMA - HAULING ON PARTIALLY COMPLETED FULL-DEPTH PAVEMENT (BDE)	117
HOT-MIX ASPHALT - FIELD VOIDS IN THE MINERAL AGGREGATE (BDE).....	118
HOT-MIX ASPHALT – PLANT TEST FREQUENCY (BDE)	120
HOT-MIX ASPHALT – TRANSPORTATION (BDE)	121
LIQUIDATED DAMAGES (BDE).....	122
MAST ARM ASSEMBLY AND POLE (BDE).....	122
METAL HARDWARE CAST INTO CONCRETE (BDE).....	123
MONTHLY EMPLOYMENT REPORT (BDE)	124
NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM / EROSION AND SEDIMENT CONTROL DEFICIENCY DEDUCTION (BDE)	126
NOTCHED WEDGE LONGITUDINAL JOINT (BDE).....	126
NOTIFICATION OF REDUCED WIDTH (BDE)	127
PAYMENTS TO SUBCONTRACTORS (BDE)	128
PAYROLLS AND PAYROLL RECORDS (BDE).....	129
PERSONAL PROTECTIVE EQUIPMENT (BDE)	130
PRECAST CONCRETE HANDLING HOLES (BDE)	130

Revised 04/08/2009

PRISMATIC CURB REFLECTORS (BDE)	132
RECLAIMED ASPHALT PAVEMENT (RAP) (BDE)	132
REFLECTIVE SHEETING ON CHANNELIZING DEVICES (BDE)	139
REINFORCEMENT BARS (BDE)	140
REINFORCEMENT BARS - STORAGE AND PROTECTION (BDE).....	141
SELF-CONSOLIDATING CONCRETE FOR CAST-IN-PLACE CONSTRUCTION (BDE).....	141
SELF-CONSOLIDATING CONCRETE FOR PRECAST PRODUCTS (BDE).....	145
SIGN PANELS AND SIGN PANEL OVERLAYS (BDE)	147
SILT FILTER FENCE (BDE)	147
STONE GRADATION TESTING (BDE).....	147
SUBCONTRACTOR MOBILIZATION PAYMENTS (BDE)	148
TEMPORARY EROSION CONTROL (BDE)	148
VARIABLY SPACED TINING (BDE).....	149
WORKING DAYS (BDE)	149
AMERICAN RECOVERY AND REINVESTMENT ACT PROVISIONS (BDE)	150
BITUMINOUS MATERIALS COST ADJUSTMENTS (BDE) (RETURN FORM WITH BID)	151
STEEL COST ADJUSTMENT (BDE) (RETURN FORM WITH BID)	154
AMERICAN RECOVERY AND REINVESTMENT ACT SIGNING (BDE)	158

Revised 04/08/2009

The paint manufacturer's product data sheets shall be available for QA review in the shop and submitted to the Engineer prior to start of field work and the requirements as outlined in the data sheets shall be followed.

Special Instructions.

Painting Date/System Code. At the completion of the work, the Contractor shall stencil in contrasting color paint the date of painting the bridge, the painting Contractors name, and the paint type code from the Structure Information and Procedure Manual for the system used. The letters shall be capitals, not less than 2 in. (50 mm) and not more than 3 in. (75 mm) in height.

The stencil shall contain the following wording "PAINTED BY (insert the name of the painting Contractor)" and shall show the month and year in which the painting was completed, followed by "CODE S" for the Inorganic Zinc/ Acrylic System, "CODE X" for the Organic Zinc/ Epoxy/ Urethane System, "CODE AB" for the Organic Zinc/ Epoxy/ Urethane System (shop applied), and "CODE U" for the Aluminum Epoxy Mastic/ Acrylic System all stenciled on successive lines. This information shall be stenciled on the cover plate of a truss end post near the top of the railing, or on the outside face of an outside stringer near both ends of the bridge facing traffic, or at some equally visible surface designated by the Engineer.

Method of Measurement. Shop cleaning and painting new structures will not be measured for payment. Field cleaning and painting will not be measured for payment except when performed under a contract that contains a separate pay item for this work.

Basis of Payment. This work will be paid for according to Article 506.07.

SLOPE WALL, SPECIAL

This item shall consist of all labor and materials required to construct a concrete slope wall as shown on the plans as herein specified. All work shall be in accordance with the applicable requirements of Section 511 of the Standard Specifications.

Slope wall shall be measured for payment in place, and the area computed in square meters (square yards) in accordance with Section 511 of the Standard Specifications.

This work will be paid for at the contract unit price per square meter (square yard) for SLOPE WALL, SPECIAL, installed and measured as specified herein. Preparation of the earth bed, excavation, backfilling, disposal of surplus materials, decorative sawcuts, and furnishing and placing all materials, including fabric reinforcement and anchor and cut-off walls will not be paid for separately, but shall be included in the cost of the slope wall.

Revised 04/08/09

This page intentionally left blank.

Deleted 04/08/09

This page intentionally left blank.

Deleted 04/08/09

This page intentionally left blank.

Deleted 04/08/09

AMERICAN RECOVERY AND REINVESTMENT ACT SIGNING (BDE)

Effective: April 1, 2009

Revised: April 2, 2009

Description. This work shall consist of furnishing, fabricating and installing sign panels, complete with sign faces, legend, and supplemental panels according to Section 720 of the Standard Specifications and as specified herein.

Materials. The “Putting America to Work” sign shall be fabricated using Type AP fluorescent orange sheeting for the background material with black vinyl or black opaque ink legend, symbol and borders. The “American Recovery and Reinvestment Act” sign shall be fabricated using Type AP green sheeting for the background with Type AP white sheeting for the legend and border. A green translucent overlay film may also be used over white Type AP sheeting to fabricate the “American Recovery and Reinvestment Act” sign.

Sign Layout. See following attachment. The “Putting America to Work” sign shall be 84 in. x 18 in. The “American Recovery and Reinvestment Act” sign shall be 84 in x 60 in.

General. The signs shall be erected to applicable portions of Article 701.14 of the Standard Specifications. These signs shall be erected midway between the first and second warning signs as required by the traffic control plan and standards utilized for this project. If the second warning sign is defining a moving or intermittent operation, the sign may be maintained at a distance of 500 ft (150 m) beyond the first post mounted ROAD CONSTRUCTION AHEAD sign. The signs shall remain in place for the duration of the project. Upon completion of the project, the signs and posts shall be removed and shall remain the property of the Contractor.

Basis of Payment. This work will not be paid for separately but shall be included in the cost of Traffic Control items as shown on the plans.

Added 04/08/2009

**PROJECT FUNDING SOURCE SIGN ASSEMBLY
AMERICAN RECOVERY AND REINVESTMENT ACT
SIGN LAYOUT DETAILS**



PROJECT FUNDING SOURCE
SIGN ASSEMBLY

Added 04/08/2009

**PROJECT FUNDING SOURCE SIGN ASSEMBLY
 AMERICAN RECOVERY AND REINVESTMENT ACT
 SIGN LAYOUT DETAILS**



NOTE: SIGN SHALL NOT BE INSTALLED WITHOUT PROJECT FUNDING SOURCE PLAQUE

Dimensions in inches

A	B	C	D	E	F	G	H	J	K	L	M	N	P
120	84	1.5	6	5 D	4.5	8 D*	3.75	6 D* (45 LC)	14.5	10	27.917	5	10.831
84	60	1	5	4 C	3.5	6 C*	3	4 D* (3 LC)	9.25	7	19.047	4	7.362

Q	R	S	T	U	V	W	X	Y	Z	AA	BB	CC	DD
14.087	8.106	11.556	49.42	2.742	5.258	46.904	6.812	46.76	22.472	8	16.288	5	30
9.484	5.162	7.763	31.722	2.415	3.585	30.552	4.542	30.911	14.737	6	10.175	4	21


EE	FF	GG
11	4.5	3
7.5	2.25	2.25

- * Increase character spacing 50%
- ** See Pictograph
- *** See Pictograph

COLORS: LEGEND, BORDER — WHITE (RETROREFLECTIVE)
 BACKGROUND — GREEN (RETROREFLECTIVE)

Added 04/08/2009

PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS

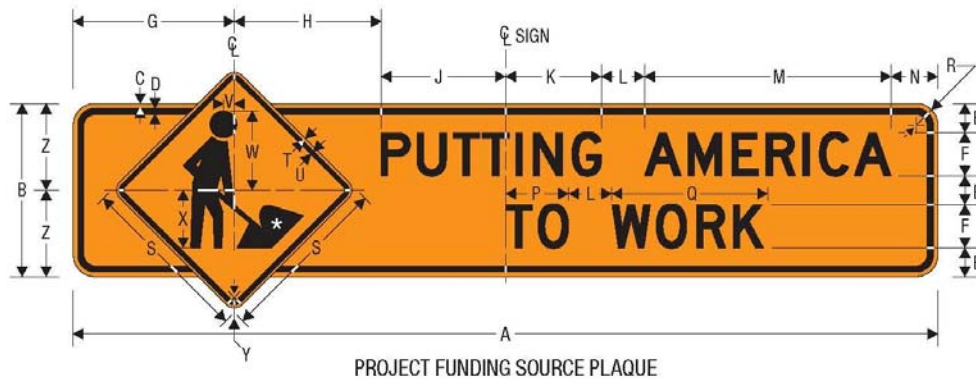

NOTE: PLAQUE SHALL NOT BE INSTALLED
 WITHOUT SIGN

* See *Standard Highway Signs*
 Page 6-59 for symbol design.

Dimensions in inches

A	B	C	D	E	F	G	H	J	K	L	M	N	P
120	24	0.625	0.875	4	6 D	22.349	20.370	17.281	13.28	6	34.22	6.5	8.765
84	18	0.375	0.625	3.5	4 D	16.607	15.686	9.707	10.667	4	22.813	5	5.843

Q	R	S	T	U	V	W	X	Y	Z
21.013	3	24	0.375	0.625	1.5	11	8	1.5	12
14.009	2.25	18	0.375	0.625	1	7	6	1.5	9

COLORS: LEGEND, BORDER — BLACK
 BACKGROUND — ORANGE (RETROREFLECTIVE)

Added 04/08/2009

**PROJECT FUNDING SOURCE SIGN ASSEMBLY
AMERICAN RECOVERY AND REINVESTMENT ACT
SIGN LAYOUT DETAILS**



RECOVERY
Vector-Based, Vinyl-Ready Pictograph

COLORS: LEGEND, OUTLINE	— WHITE (RETROREFLECTIVE)
BORDER	— BLUE (RETROREFLECTIVE)
BACKGROUND (UPPER)	— BLUE (RETROREFLECTIVE)
BACKGROUND (LOWER RIGHT)	— RED (RETROREFLECTIVE)
BACKGROUND (LOWER LEFT)	— GREEN (RETROREFLECTIVE)

Added 04/08/2009

**PROJECT FUNDING SOURCE SIGN ASSEMBLY
AMERICAN RECOVERY AND REINVESTMENT ACT
SIGN LAYOUT DETAILS**



USDOT TIGER
Vector-Based, Vinyl-Ready Pictograph

COLORS: OUTLINE — WHITE (RETROREFLECTIVE)
USDOT LEGEND — BLACK
TIGER DIAGONALS — BLACK,
ORANGE (RETROREFLECTIVE)

Added 04/08/2009