


PIPE BEDDED ON 4" MIN FINELY DIVIDED NATIVE SOIL EXCAVATED FROM TRENCH, FREE OF ROCKS, FOREIGN MATERIALS, AND FROZEN EARTH. INITIAL BACKFILL CONSOLIDATED TO TOP OF PIPE (75% STANDARD PROCTOR — ASTM D698)

EMBEDMENT TAMPED SOIL

ROCK MARKET FINAL BACKFILL FINAL BACKFILL

NATURAL SOIL

PIPE BEDDING DETAIL STMS NOT TO SCALE

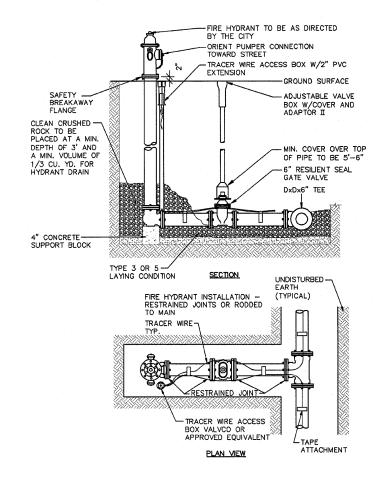



GENERAL NOTES:

ILLINOIS SPECIAL PROVISIONS FOR CONSTRUCTION OF WATER MAIN WITHIN THE ROW SHALL APPLY.



Project Mgr: MCJ Project Number 07193-02