

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1.	COVER SHEET
2.	GENERAL NOTES, DETAILS, AND TYPICAL SECTIONS
3.	SUMMARY OF QUANTITIES AND DETAILS
4.	SCHEDULES OF QUANTITIES
5.	TRAFFIC CONTROL PLAN
6.-7.	STORM WATER POLLUTION PREVENTION PLAN
8.-9.	PLAN AND PROFILE
10.-31.	STRUCTURE PLANS
32.-53.	CROSS SECTIONS

REQUIRED HIGHWAY STANDARDS

000001-05	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
280001-04	TEMPORARY EROSION CONTROL SYSTEMS
515001-03	NAME PLATE FOR BRIDGES
542101-02	REINFORCED CONCRETE END SECTIONS FOR PIPE CULVERTS 15" (375 MM) THRU 36" (900 MM) DIA. AT RIGHT ANGLES WITH ROADWAY
542401-01	METAL END SECTION FOR PIPE CULVERTS
601101-01	CONCRETE HEADWALL FOR PIPE DRAIN
606001-04	CONCRETE CURB TYPE B AND COMBINATION CONCRETE CURB AND GUTTER
606401-01	PAVED DITCH
609006-04	BRIDGE APPROACH PAVEMENT (DRAIN DETAIL)
630001-08	STEEL PLATE BEAM GUARDRAIL
630301-05	SHOULDER WIDENING FOR TYPE 1 (SPECIAL) GUARDRAIL TERMINALS
631031-07	TRAFFIC BARRIER TERMINAL, TYPE 6
635006-03	REFLECTOR AND TERMINAL MARKER PLACEMENT
635011-02	REFLECTOR MARKER AND MOUNTING DETAILS
701901-01	TRAFFIC CONTROL DEVICES
780001-02	TYPICAL PAVEMENT MARKINGS
BLR 21-8	TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS
BLR 24-2	MAILBOX TURNOUT FOR LOCAL ROADS

UTILITY COMPANIES

CORN BELT ENERGY CORP.
PRINCETON, ILLINOIS


NICOR GAS
OTTAWA, ILLINOIS

AT&T
JOLIET, ILLINOIS

CALL J.U.L.I.E.
BEFORE YOU DIG
1-800-892-0123 OR 811



CONTRACT NO. 87368

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION PLANS FOR PROPOSED MAJOR BRIDGE FUNDS LASALLE COUNTY SECTION 05-00626-00-BR F.A.S. 1365 (CH 33) OVER LITTLE VERMILION RIVER PROJECT NO. BRS-1365(111) JOB NUMBER C-93-116-08

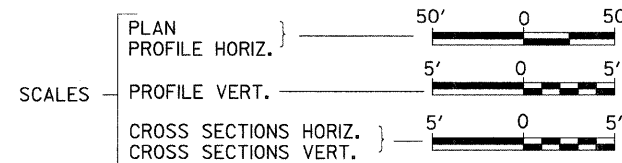

PROPOSED STRUCTURE NO. 050-3587
THREE SPAN 36" P.P.C. I-DECK BEAM
WITH CONCRETE DECK STRUCTURE
ON CONC. INTEGRAL ABUTMENTS
AND CONC. ENCASED PIERS,
169'-4" BK. TO BK. AND 35'-2" O. TO O.,
30° LT. AH. SKEW

SECTION 05-00626-00-BR
BEGINS
STATION 12+25.00

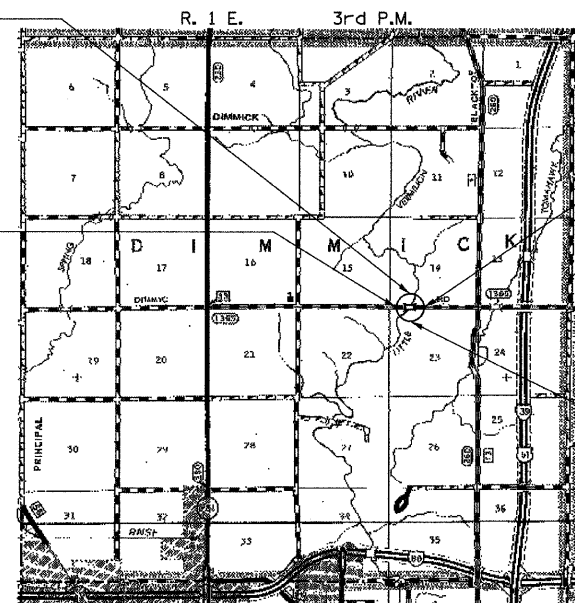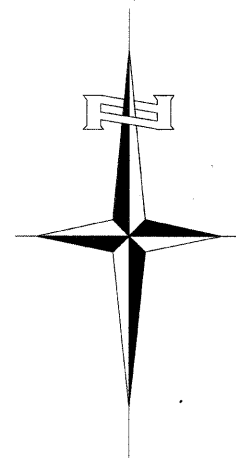

LOCATION MAP

1 MI 0 1 MI
APPROXIMATE SCALE

SECTION 05-00626-00-BR
ENDS
STATION 31+25.00


EXISTING STRUCTURE 050-3055
SINGLE SPAN CONCRETE T-BEAM
SUPERSTRUCTURE ON CONCRETE CLOSED
ABUTMENTS ON TIMBER PILE SUPPORTED
CONCRETE FOOTINGS,
±53'-11" BK. TO BK., AND ±25'-4" O. TO O.,
30° LT. AH. SKEW (TO BE REMOVED)

NET LENGTH OF PROJECT = 1,900.00 FEET = 0.36 MILES
DESIGN CLASSIFICATION: MAJOR-COLLECTOR (NON-URBAN)
DESIGN ADT = 1000 (2029)
DESIGN SPEED = 50 MPH

Hutchison Engineering, Inc.
JACKSONVILLE ILLINOIS
SHOREWOOD ILLINOIS

2008

JOB#2498



Signature
ENGINEER'S SEAL

APPROVED 1/29 2009

Signature of J. King
LASALLE COUNTY ENGINEER

PASSED 01-30-09 2009

Signature of Kenneth R. King
DISTRICT THREE ENGINEER OF
LOCAL ROADS & STREETS

Released For
Bid Based on
Limited Review 01-30-09 2009

Signature of George E. Ryan
DEPUTY DIRECTOR OF HIGHWAYS,
REGION TWO ENGINEER

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION



LOCATION OF SECTION INDICATED THUS: -