


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
PLANS FOR PROPOSED
HIGHWAY BRIDGE PROGRAM

TOWNSHIP ROUTE 265 (LINGLE CREEK ROAD)
COUNTY UNIT ROAD DISTRICT
SECTION 04-01183-00-BR
PROJECT NO. BROS-181(43)
JOB NO. C-99-550-04
LINGLE CREEK

UNION COUNTY

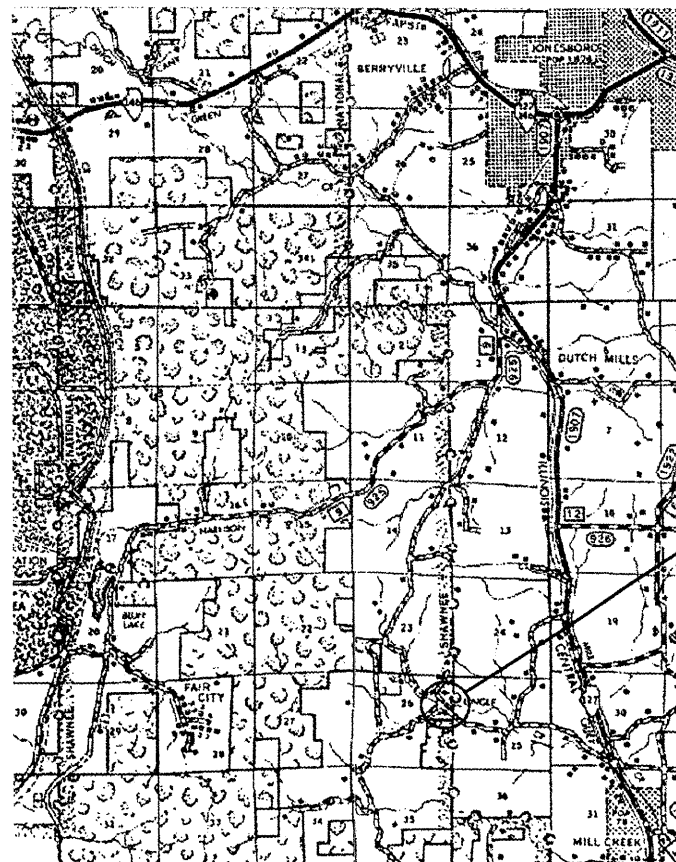


LOCATION MAP

SCALE: 1" = 2 MILES

NET LENGTH OF IMPROVEMENT = 612.00 FT. = 0.1159 MILES

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
TR 265	04-01183-00-BR	UNION	10	1
PROJECT NO. BROS-181(43)		CONTRACT NO. 99252		

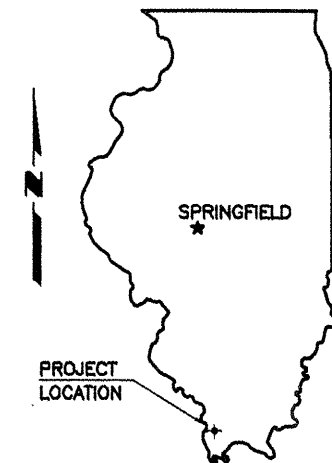

INDEX OF SHEETS

- COVER SHEET
 - PLAN AND PROFILE
 - GENERAL PLAN AND ELEVATION
 - DECK BEAMS 21" X 36"
 - DECK BEAMS 21" X 48"
 - ABUTMENTS
 - STEEL RAILING
 - NAME PLATES
 - PILE DETAILS
 - CROSS SECTIONS
- STANDARDS 000001-05 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
280001-04 TEMPORARY EROSION CONTROL SYSTEMS
701901-01 TRAFFIC CONTROL DEVICES
BLR-21-8 TRAFFIC CONTROL

CLASSIFICATION : LOCAL ROAD
ADT : 100
DESIGN SPEED : 30 MPH

SUMMARY OF QUANTITIES			
CODE NO.	PAY ITEM	UNIT	TOTAL
20100110	TREE REMOV 6-15	UNIT	59
20100210	TREE REMOV OVER 15	UNIT	71
20200100	EARTH EXCAVATION	CU YD	446
20300100	CHANNEL EXCAVATION	CU YD	67
25000200	SEEDING, CLASS 2	ACRE	0.4
25000400	NITROGEN FERTILIZER NUTRIENT	POUND	36
25000500	PHOSPHORUS FERTILIZER NUTRIENT	POUND	36
25000600	POTASSIUM FERTILIZER NUTRIENT	POUND	36
25000700	AGRICULTURAL GROUND LIMESTONE	TON	0.8
25100120	MULCH, METHOD 2	TON	0.8
28100809	STONE DUMPED RIPRAP, CLASS A5	TON	217
40200800	AGGREGATE SURFACE COURSE, TYPE B	TON	842
50100100	REMOVAL OF EXISTING STRUCTURES	EACH	1
50200100	STRUCTURE EXCAVATION	CU YD	48
50300225	CONCRETE STRUCTURES	CU YD	16.6
50300280	CONCRETE ENCASEMENT	CU YD	2.1
50400405	PRECAST PRESTRESSED CONCRETE DECK BEAMS (21" DEPTH)	SQ FT	1198
50800105	REINFORCEMENT BARS	POUND	2240
* 50900205	STEEL RAILING, TYPE S1	FOOT	100
51201400	FURNISHING STEEL PILES HP10X42	FOOT	244
51202305	DRIVING PILES	FOOT	244
51500100	NAME PLATES	EACH	1
54200223	PIPE CULVERTS, CLASS D, TYPE 1 18"	FOOT	46
67100100	MOBILIZATION	L SUM	1

* SPECIALTY ITEMS

JOINT UTILITY LOCATION INFORMATION
FOR EXCAVATION
J.U.L.I.E. 1-800-892-0123
CONTACT 48 HOURS BEFORE EXCAVATING

CONTRACT NO. 99252

E. MILLER ENGINEERING, INC.
CONSULTING ENGINEERS
HARRISBURG, ILLINOIS



Edward W. Miller
PROFESSIONAL ENGINEER
#062-025277
EXPIRES NOV. 30, 2009

ILLINOIS DEPARTMENT OF TRANSPORTATION	
Approved	<u>February 27, 2008</u> <u>Bruce L. Boyd</u> Union County Engineer
Passed	<u>12-16-08</u> <u>Carl Miley</u> District 9 Engineer of Local Roads and Streets
Releasing for Bid Based on Limited Review	<u>12-16-08</u> <u>Mary C. Harris</u> Deputy Director of Highways, Region 5 Engineer