



When cantilever forming brackets are used, the work shall be done according to Article 503.06(b) of the Standard Specifications, except as modified below and in the details shown on this sheet.
 The finishing machine rails shall be placed on the top flange of the exterior beams.
 The beams or girders, supporting cantilever forming brackets, shall be tied together at 4 foot intervals.
 For Standard construction, or Stage Construction the Hardwood bracing materials shall be placed as shown between webs of beams in each bay.

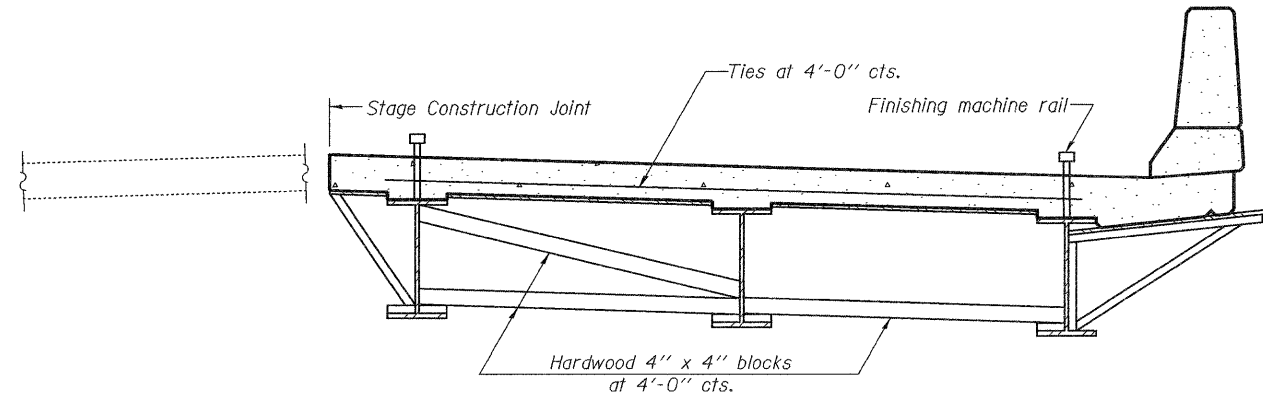

**FORM BRACES FOR
STAGE CONSTRUCTION**

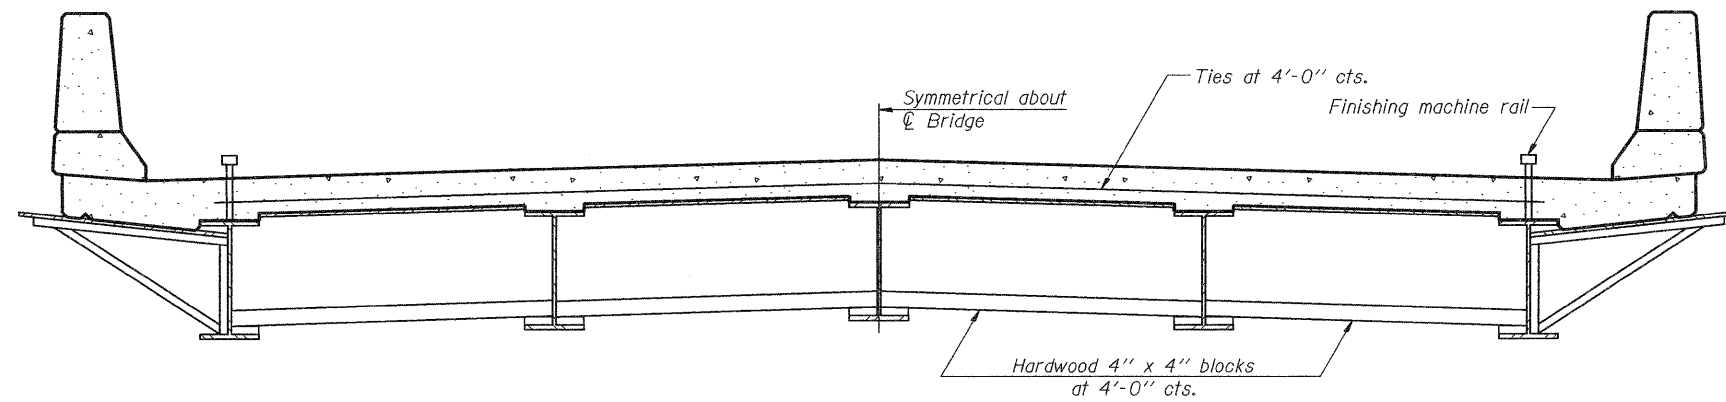

**FORM BRACES FOR
STANDARD CONSTRUCTION**

SB-1

7-1-10

*PERRY/FRANKLIN

DESIGNED - Jessica C. Forrest	EXAMINED - <i>Thomas J. Domagalaki</i> ENGINEER OF BRIDGE DESIGN	DATE - 5/10/2011
CHECKED - Nicholas R. Barnett	PASSED - <i>Carl Perry</i> ENGINEER OF BRIDGES AND STRUCTURES	
DRAWN - h.t. duong		
CHECKED - JCF/NRB		

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**CANTILEVER FORMING BRACKETS FOR SUPERSTRUCTURES WITH
W27 BEAMS AND SMALLER
STRUCTURE NO. 073-0038**

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
869	6B-2	*	237	152
			CONTRACT NO. 98797	
ILLINOIS FED. AID PROJECT				

SHEET NO. 22 OF 26 SHEETS