

06/17/2022 LETTING ITEM 107

FOR INDEX OF SHEETS, SEE SHEET NO. 2
FOR INDEX OF HIGHWAY STANDARDS, SEE SHEET NO. 2

FUNCTIONAL CLASSIFICATION
MAJOR COLLECTOR

TRAFFIC DATA
WASHINGTON AVENUE
ADT (2018) = 4,600

POSTED SPEED LIMIT
WASHINGTON AVENUE = 30 MPH

DESIGN SPEED LIMIT
WASHINGTON AVENUE = 30 MPH

STATE OF ILLINOIS

DEPARTMENT OF TRANSPORTATION

PLANS FOR PROPOSED FEDERAL AID HIGHWAY

FAU ROUTE 1472 (WASHINGTON AVENUE)
KEMMAN AVE TO PRAIRIE AVENUE
RESURFACING
SECTION NO.: 21-00135-00-RS
PROJECT NO.: Z3Q2(622)
VILLAGE OF BROOKFIELD
COOK COUNTY


FAU ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	1
ILLINOIS PROJECT				
CONTRACT NO. 61H70				



LOCATION OF SECTION INDICATED THUS:



♦ Civil Engineers 9933 Roosevelt Road
 ♦ Municipal Consultants Westchester, IL, 60154-2780
 ♦ Established 1911 Phone: 708-865-0300
 www.ehancock.com

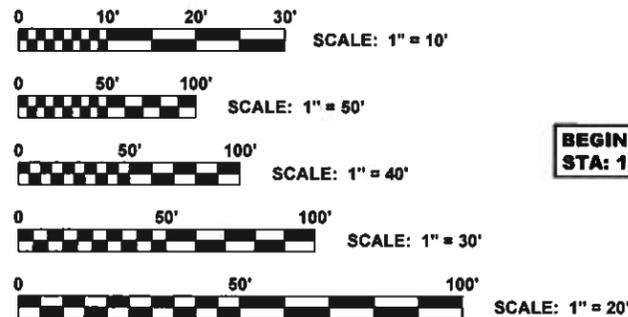

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.


J.U.L.I.E.
 JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
 1-800-892-0123
 OR 811

**BEGIN PROJECT
STA: 1+00.00**

**BEGIN OMISSION
STA: 26+17.00**

**END OMISSION
STA: 28+38.00**

**END PROJECT
STA: 47+16.00**

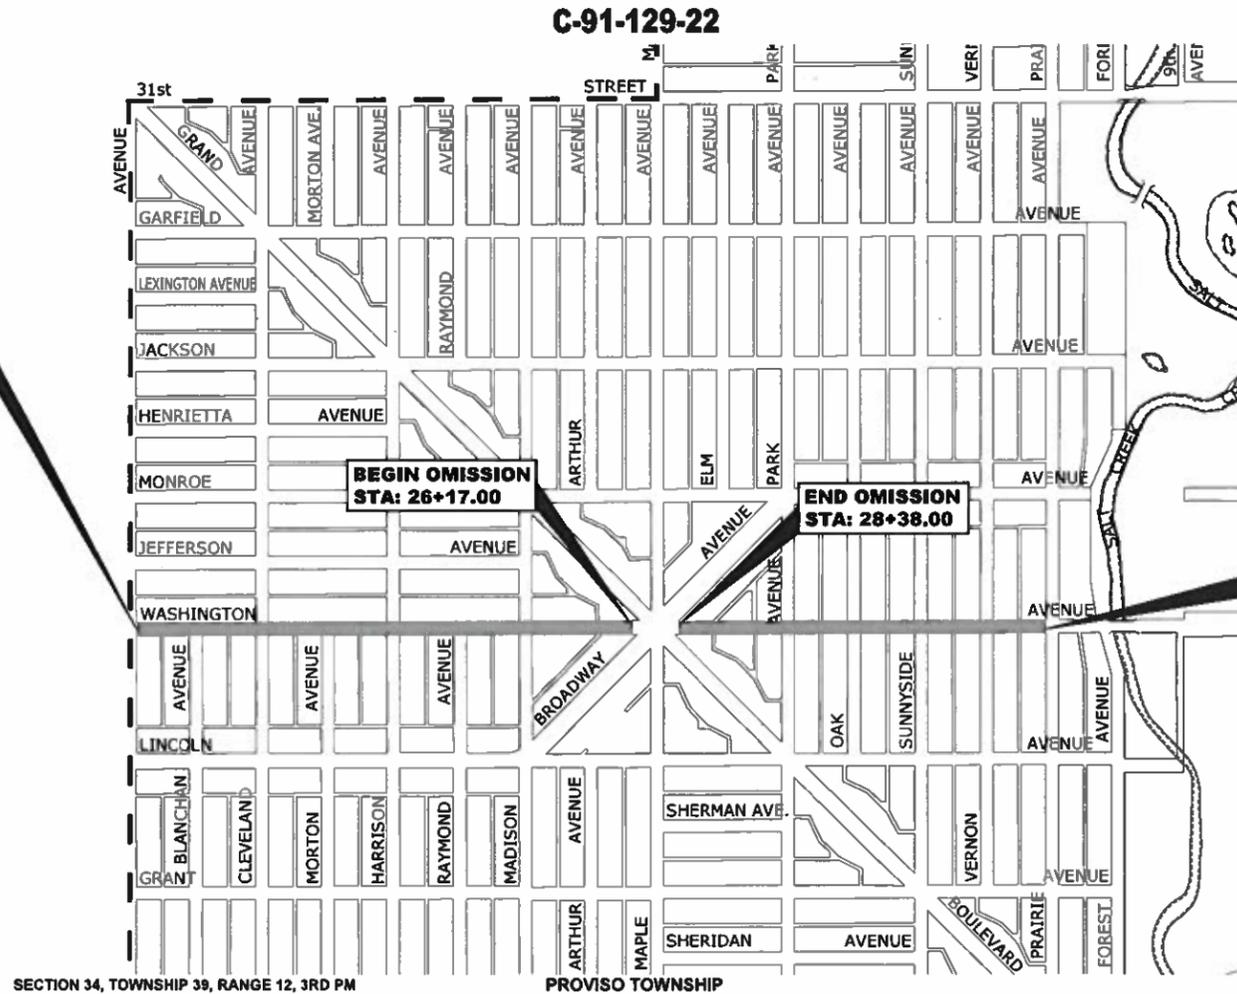

(NOT TO SCALE)

SECTION 34, TOWNSHIP 39, RANGE 12, 3RD PM
PROVISO TOWNSHIP

LOCATION MAP
NOT TO SCALE

CONTRACT NO. 61H70

GROSS LENGTH OF IMPROVEMENT = 4,616.00 FT = 0.874 MI
NET LENGTH OF IMPROVEMENT = 4,395.00 FT = 0.832 MI

STATE OF ILLINOIS
ILLINOIS DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

APPROVED: 3/4 20 22
M. ...
VILLAGE OF BROOKFIELD, PRESIDENT

PASSED: April 6 20 22
C. ...
DISTRICT 1 ENGINEER OF LOCAL ROADS & STREETS

RELEASED FOR BID
BASED ON LIMITED
REVIEW: April 6 20 22
Joe ...
REGIONAL ENGINEER



SIGNED: Drew Trechsel
DATE: 03-07-2022 LICENSE EXPIRES: 11-30-23

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave L&D\Cover.dwg May 23, 2022 8:32am FEDERAL AID PROGRAM DESIGN ENGINEER: CARMEN E. RAMOS, P.E., SCHAUMBURG, IL

GENERAL NOTES

- ANY REFERENCE TO STANDARDS THROUGHOUT THE PLANS OR SPECIAL PROVISIONS SHALL BE INTERPRETED TO BE THE LATEST STANDARD OF THE ILLINOIS DEPARTMENT OF TRANSPORTATION AS SHOWN ON THE INDEX OF SHEETS IN THE PLANS. ALL CONSTRUCTION SHALL BE DONE IN ACCORDANCE WITH THE "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION" ADOPTED JANUARY 1, 2022. THE LATEST EDITION OF THE "ILLINOIS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS," "THE STANDARD SPECIFICATIONS FOR WATER AND SEWER MAIN CONSTRUCTION IN ILLINOIS" 8TH EDITION, AND THE "DETAILS" IN THE PLANS AND THE "SPECIAL PROVISIONS" INCLUDED IN THE CONTRACT DOCUMENTS. VILLAGE OF BROOKFIELD MUNICIPAL CODE. THE METROPOLITAN WATER RECLAMATION DISTRICT OF GREATER CHICAGO (MWRD) WATERSHED MANAGEMENT ORDINANCE AND TECHNICAL GUIDANCE MANUAL. IN CASE OF CONFLICT BETWEEN THE APPLICABLE ORDINANCES NOTED, THE MORE STRINGENT SHALL TAKE PRECEDENCE AND SHALL CONTROL ALL CONSTRUCTION.
- BEFORE STARTING ANY EXCAVATION, THE CONTRACTOR SHALL CALL "JULIE" AT 811 FOR FIELD LOCATIONS OF BURIED ELECTRICAL, TELEPHONE AND GAS FACILITIES. (48 HOURS NOTIFICATION IS REQUIRED).
- THE LOCATIONS OF THE UNDERGROUND UTILITIES IF SHOWN ON THE PLANS HAVE BEEN OBTAINED BY FIELD SURVEYS AND SEARCHES OF AVAILABLE RECORDS. THE VILLAGE OF BROOKFIELD, THE ILLINOIS DEPARTMENT OF TRANSPORTATION AND/OR OTHER OFFICES AND AGENCIES ASSOCIATED WITH THE DEVELOPMENT OF THESE PLANS DO NOT GUARANTEE THEIR ACCURACY OR COMPLETENESS. THE CONTRACTOR SHALL BE REQUIRED TO VERIFY THE EXACT LOCATION OF EACH FACILITY WITH THE UTILITY COMPANY, AND SHALL TAKE DUE CARE IN ALL PHASES OF THE CONSTRUCTION TO PROTECT ANY SUCH FACILITIES WHICH MAY BE AFFECTED BY THE WORK. ANY DAMAGE TO EXISTING UTILITIES DURING CONSTRUCTION ACTIVITIES SHALL BE REPAIRED OR REPLACED TO THE SATISFACTION OF THE ENGINEER.
- THE CONTRACTOR SHALL COORDINATE CONSTRUCTION ACTIVITIES WITH UTILITY COMPANIES AND THE VILLAGE OF BROOKFIELD.
- ON ALL IMPROVEMENTS, THE FRAMES AND LIDS OF EXISTING CATCH BASINS, INLETS, MANHOLES, AND VALVE VAULTS WHICH ARE TO BE ABANDONED DUE TO CONSTRUCTION OF THIS IMPROVEMENT ARE TO REMAIN THE PROPERTY OF THE VILLAGE OF BROOKFIELD AND BE SALVAGED. THE CONTRACTOR SHALL DELIVER FRAMES AND LIDS TO THE VILLAGE OF BROOKFIELD LOCATED AT 4545 EBERLY AVE, BROOKFIELD, IL 60513 (708) 485-7344.
- THE WORD "WATER", "SANITARY", OR "STORM" SHALL BE CAST INTO THE LID OF EACH RESPECTIVE MANHOLE OR VALVE VAULT
- THE CONTRACTOR SHALL CONDUCT OPERATIONS AS TO MAINTAIN AT ALL TIMES FLOW THROUGH EXISTING STORM AND SANITARY SEWER SYSTEMS. THE CONTRACTOR SHALL ALSO PROVIDE AND MAINTAIN AN EFFICIENT PUMPING PLANT IF NECESSARY AND A TEMPORARY OUTLET AND BE PREPARED AT ALL TIMES TO DISPOSE OF THE WATER COLLECTED IN A SAFE MANNER WITHOUT DAMAGE OF ANY KIND TO ADJACENT PROPERTIES. THE ENDS OF EXISTING DRAINAGE LINES THAT ARE NOT TO BE INCORPORATED INTO THE PROJECT SHALL BE SEALED AS SPECIFIED IN THE SPECIAL PROVISIONS. EXISTING STRUCTURES ARE TO BE INSPECTED BEFORE CONSTRUCTION STARTS - ANY ACCUMULATION OF MATERIAL IN THE STRUCTURE DUE TO CONSTRUCTION OPERATIONS SHALL BE REMOVED BY THE CONTRACTOR.
- CONTRACTOR SHALL TAKE PRECAUTION BY PRESERVING EXISTING TREES WITHIN THE RIGHT OF WAY. IF ANY DAMAGE OCCURS, TREE SHALL BE REPLACED IN KIND PER ARTICLE 201.07 REPAIR OR REPLACEMENT OF EXISTING PLANT MATERIAL REQUIREMENTS STATED HEREIN.
- WHEN REMOVING PAVEMENT AND/OR OTHER STRUCTURES, THE CONTRACTOR SHALL NOT USE ANY TYPE OF CONCRETE BREAKERS SUCH AS DROP HAMMERS, THAT MIGHT DAMAGE UNDERGROUND PUBLIC OR PRIVATE UTILITIES.
- THE CONTRACTOR SHALL SAW CUT ASPHALT PAVEMENT AS INDICATED ON THE PLANS TO SEPARATE THE EXISTING PAVEMENT TO BE REMOVED BY APPROVED MEANS OR AN APPROVED CONCRETE SAW TO A DEPTH AS DIRECTED BY THE ENGINEER. SUITABLE GUIDELINES OR DEVICES SHALL BE USED TO ASSURE CUTTING A NEAT, STRAIGHT LINE AS SHOWN ON THE PLANS. CARE SHALL BE TAKEN BY THE CONTRACTOR AS NOT TO DAMAGE THE REMAINING PAVEMENT DIRECTLY ADJACENT TO THE PAVEMENT TO BE REMOVED. ANY DAMAGE TO THE EXISTING PAVEMENT RESULTING FROM PAVEMENT REMOVAL OPERATIONS SHALL BE REPAIRED TO THE SATISFACTION OF THE ENGINEER.
- THE CONTRACTOR WILL NOT BE ALLOWED TO SET UP A YARD OR FIELD OFFICE ON STATE OR VILLAGE PROPERTY WITHOUT WRITTEN PERMISSION FROM THE ENGINEER.
- A BUTT JOINT WILL BE INSTALLED AT THE ENDS OF ALL RESURFACING (WHERE RESURFACING MEETS EXISTING PAVEMENT) IN ACCORDANCE WITH THE "BUTT JOINT AND HMA TAPER DETAILS" SHEET INCLUDED IN THE PLANS, UNLESS OTHERWISE SPECIFIED.
- WHEN MILLED PAVEMENT IS OPEN TO TRAFFIC THE MAXIMUM GRADE DIFFERENTIAL BETWEEN PASSES OF THE MILLING MACHINE SHALL NOT EXCEED 1½ INCHES (40 MM) WHERE THE SPEED LIMIT IS 45 MPH (80 KM/H) OR LESS AND 1 INCH (25 MM) WHERE THE SPEED LIMIT IS GREATER THAN 45 MPH (80 KM/H). WITH WRITTEN APPROVAL FROM THE ENGINEER, A MAXIMUM GRADE DIFFERENTIAL OF 3 INCHES (75 MM) MAY BE ALLOWED IF THE EDGE OF THE MILLING IS SLOPED A MINIMUM 1:3 (V:H).
- THE CONTRACTOR WILL BE REQUIRED TO SCHEDULE THEIR OPERATIONS SO THAT NO SECTIONS OF PAVEMENT ALONG THE CENTERLINE WILL HAVE A COLD JOINT OVERNIGHT.
- LOCATIONS OF CLASS B PATCHES ON PLANS ARE APPROXIMATE. EXACT LOCATIONS WILL BE DETERMINED IN THE FIELD BY ENGINEER. CLASS B PATCHES LOCATED WITHIN THE THROUGH LANES SHALL BE MADE ACCESSIBLE TO TRAFFIC AT THE END OF EACH WORK DAY.
- PAVEMENT PATCHING SHALL BE STAGED TO MAINTAIN TWO-WAY TRAFFIC AT ALL TIMES.
- THE CONTRACTOR SHALL MAINTAIN ACCESS FOR EMERGENCY VEHICLES AND GARBAGE TRUCKS AT ALL TIMES. IF THE GARBAGE TRUCKS ARE NOT ABLE TO HAVE ACCESS TO ALL OF THE PROPERTIES WITHIN THE PROJECT LIMITS, THEN THE CONTRACTOR SHALL PLACE ANY GARBAGE THAT IS AFFECTED IN A LOCATION WHERE THE GARBAGE TRUCKS CAN PICK IT UP. THE CONTRACTOR SHALL RETURN THE GARBAGE CANS TO THE PARKWAY OF THE RESPECTIVE PROPERTY BY THE END OF THE DAY.
- THE CONTRACTOR SHALL TAKE PRECAUTIONS SO AS NOT TO DAMAGE EXISTING SIDEWALKS, DRIVEWAYS, AND PAVEMENTS OUTSIDE THE LIMITS OF RESTORATION. THE GENERAL LIMITS OF RESTORATION ARE SHOWN ON THE PLANS. THE ENGINEER WILL MARK OUT THE EXACT LIMITS OF REMOVAL FOR THESE ITEMS PRIOR TO THE COMMENCEMENT OF WORK. THE CONTRACTOR SHALL RESTORE ANY DAMAGE TO SIDEWALKS, DRIVEWAYS, AND PAVEMENTS OUTSIDE OF THESE LIMITS TO THE SATISFACTION OF THE ENGINEER.

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	COVER SHEET
2	INDEX OF SHEETS, GENERAL NOTES AND IDOT HIGHWAY STANDARDS
3	M.W.R.D.G.C. GENERAL NOTES
4-7	SUMMARY OF QUANTITIES
8-9	EXISTING AND PROPOSED TYPICAL SECTIONS
10-13	RESURFACING PLAN
14-17	PAVEMENT MARKING AND SIGNING PLAN
18-20	EROSION AND SEDIMENT CONTROL PLAN
21-22	JOB SPECIFIC DETAILS
23	DETAILS FOR FRAME AND LIDS ADJUSTMENT WITH MILLING
24	BUTT JOINT AND HMA TAPER DETAILS
25	TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS
26	DISTRICT ONE TYPICAL PAVEMENT MARKINGS
27	ARTERIAL ROAD INFORMATION SIGN

IDOT HIGHWAY STANDARDS

STANDARD NO.	DESCRIPTION
000001-08	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
280001-07	TEMPORARY EROSION CONTROL SYSTEMS
424001-11	PERPENDICULAR CURB RAMPS FOR SIDEWALKS
442101-09	CLASS B PATCHES
604001-05	FRAME AND LIDS, TYPE 1
701006-05	OFF ROAD OPERATION MARKERS, 2L, 2W 15' (4.5m) TO 24" (600mm) FROM PAVEMENT EDGE
701301-04	LANE CLOSURE, 2-LANE, 2-WAY, SHORT-TIME OPERATIONS
701311-03	LANE CLOSURE, 2-LANE, 2-WAY, MOVING OPERATIONS, DAY ONLY
701501-06	URBAN LANE CLOSURE, 2-LANE, 2-WAY, UNDIVIDED
701701-10	URBAN LANE CLOSURE, MULTILANE INTERSECTION
701801-06	SIDEWALK, CORNER, OR CROSSWALK CLOSURE
701901-08	TRAFFIC CONTROL DEVICES
720001-01	SIGN PANEL MOUNTING DETAILS
720006-04	SIGN PANEL ERECTION DETAILS
720011-01	METAL POSTS FOR SIGNS, MARKERS & DELINEATORS
729001-01	APPLICATIONS OF TYPES A & B METAL POSTS (FOR SIGNS & MARKERS)
780001-05	TYPICAL PAVEMENT MARKINGS

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave LAFO\Notes.dwg Mar 23, 2022 - 10:32am

HANCOCK ENGINEERING

100+ Years of Excellence

- ◆ Civil Engineers
- ◆ Municipal Consultants
- ◆ Established 1911

9933 Roosevelt Road
Westchester, IL 60154-2780
Phone: 708-845-0300
www.hancockeng.com

DESIGNED	- -	REVISED	- -
DRAWN	- ECW, SFB, DMM	REVISED	- -
CHECKED	- -	REVISED	- -
DATE	- 11-17-21	REVISED	- 2-15-22 I.D.O.T.

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

INDEX OF SHEETS, GENERAL NOTES AND IDOT HIGHWAY STANDARDS

SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. - TO STA. -

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	2
CONTRACT NO. 61H70				
FED. ROAD DIST. NO. 1 ILLINOIS			FED. AID PROJECT Z3Q2(622)	

E.H.E. PROJECT NO. 1252100601

M.W.R.D.G.C. GENERAL NOTES

b. NOTIFICATIONS

1. THE MWRD LOCAL SEWER SYSTEMS SECTION FIELD OFFICE MUST BE NOTIFIED AT LEAST TWO (2) WORKING DAYS PRIOR TO THE COMMENCEMENT OF ANY WORK (CALL 708-588-4055).
2. THE VILLAGE OF BROOKFIELD ENGINEERING DEPARTMENT AND PUBLIC MUST BE NOTIFIED AT LEAST 24 HOURS PRIOR TO THE START OF CONSTRUCTION AND PRIOR TO EACH PHASE OF WORK. CONTRACTOR SHALL DETERMINE ITEMS REQUIRING INSPECTION PRIOR TO START OF CONSTRUCTION OR EACH WORK PHASE.

b. GENERAL NOTES

1. ELEVATION DATUM IS C.C.D.
2. THE ENGINEER IN COORDINATION WITH THE MWRD, THE MUNICIPALITY AND THE OWNER OR OWNER'S REPRESENTATIVE; SHALL HAVE TO THE AUTHORITY TO INSPECT, APPROVE, AND REJECT THE CONSTRUCTION IMPROVEMENTS.
3. THE CONTRACTOR(S) SHALL INDEMNIFY THE OWNER, ENGINEER, MUNICIPALITY, MWRD, AND THEIR AGENTS, ETC., FROM ALL LIABILITY INVOLVED WITH THE CONSTRUCTION, INSTALLATION OR TESTING OF THIS WORK ON THE PROJECT.
4. THE UNDERGROUND CONTRACTOR SHALL MAKE ALL NECESSARY ARRANGEMENT TO NOTIFY ALL INSPECTION AGENCIES.
5. ALL NEW AND EXISTING UTILITY STRUCTURES ON SITE AND IN AREAS DISTURBED DURING CONSTRUCTION SHALL BE ADJUSTED TO FINISH GRADE PRIOR TO FINAL INSPECTION.
6. RECORD DRAWINGS SHALL BE KEPT BY THE CONTRACTOR AND SUBMITTED TO THE ENGINEER AS SOON AS UNDERGROUND IMPROVEMENTS ARE COMPLETED. FINAL PAYMENTS TO THE CONTRACTOR SHALL BE HELD UNTIL THEY ARE RECEIVED. ANY CHANGES IN LENGTH, LOCATION OR ALIGNMENT SHALL BE SHOWN IN RED. ALL WYES OR BENDS SHALL BE LOCATED FROM THE DOWNSTREAM MANHOLE. ALL VALVES, B-BOXES, TEES OR BENDS SHALL BE TIED TO A FIRE HYDRANT.

d. SANITARY SEWER

1. A WATER-TIGHT PLUG SHALL BE INSTALLED IN THE DOWNSTREAM SEWER PIPE AT THE POINT OF SEWER CONNECTION PRIOR TO COMMENCING ANY SEWER CONSTRUCTION. THE PLUG SHALL REMAIN IN PLACE UNTIL REMOVAL IS AUTHORIZED BY THE ENGINEER IN COORDINATION WITH THE MUNICIPALITY AND/OR MWRD AFTER THE SEWERS HAVE BEEN TESTED AND ACCEPTED.
2. DISCHARGING ANY UNPOLLUTED WATER INTO THE SANITARY SEWER SYSTEM FOR THE PURPOSE OF SEWER FLUSHING OF LINES FOR THE DEFLECTION TEST SHALL BE PROHIBITED WITHOUT PRIOR APPROVAL BY THE ENGINEER IN COORDINATION WITH THE MUNICIPALITY AND/OR MWRD.
3. ALL FLOOR DRAINS SHALL DISCHARGE TO THE SANITARY SEWER SYSTEM.
4. ALL DOWNSPOUTS AND FOOTING DRAINS SHALL DISCHARGE TO THE STORM SEWER SYSTEM.
5. ALL SANITARY SEWER PIPE MATERIALS AND JOINTS (AND STORM SEWER PIPE MATERIALS AND JOINTS IN A COMBINED SEWER AREA) SHALL CONFORM TO THE FOLLOWING:

PIPE MATERIAL	PIPE SPECIFICATIONS	JOINT SPECIFICATIONS
VITRIFIED CLAY PIPE	ASTM C-700	ASTM C-425
REINFORCED CONCRETE SEWER PIPE	ASTM C-76	ASTM C-443
CAST IRON SOIL PIPE	ASTM A-74	ASTM C-564
DUCTILE IRON PIPE	ANSI A21.51	ANSI A21.11
POLYVINYL CHLORIDE (PVC) PIPE		
6-INCH TO 15-INCH DIAMETER SDR 26	ASTM D-3034	ASTM D-3212
18-INCH TO 27-INCH DIAMETER F/DY=46	ASTM F-679	ASTM D-3212
HIGH DENSITY POLYETHYLENE (HDPE FUSION)	ASTM D-3350	ASTM D-3261, F-2620 (HEAT FUSION)
	ASTM D-3035	ASTM D-3212, F-477
(GASKETED)		
WATER MAIN QUALITY PVC		
4-INCH TO 36-INCH	ASTM D-2241	ASTM D-3139
4-INCH TO 12-INCH	AWWA C900	ASTM D-3139
14-INCH TO 48-INCH	AWWA C905	ASTM D-3139

THE FOLLOWING MATERIALS ARE ALLOWED ON A QUALIFIED BASIS SUBJECT TO DISTRICT REVIEW AND APPROVAL PRIOR TO PERMIT ISSUANCE. A SPECIAL CONDITION WILL BE ADDED TO THE PERMIT WHEN THE PIPE MATERIAL BELOW IS USED FOR SEWER CONSTRUCTION OR A CONNECTION IS MADE.

PIPE MATERIAL	PIPE SPECIFICATIONS	JOINT SPECIFICATIONS
POLYPROPYLENE (PP) PIPE		
12-INCH TO 24-INCH DOUBLE WALL	ASTM F-2736	D-3212, F-477
30-INCH TO 60-INCH TRIPLE WALL	ASTM F-2764	D-3212, F-477

8. ALL SANITARY SEWER CONSTRUCTION (AND STORM SEWER CONSTRUCTION IN COMBINED SEWER AREAS), REQUIRES STONE BEDDING WITH STONE 1/2" TO 1" IN SIZE, WITH MINIMUM BEDDING THICKNESS EQUAL TO 1/4 THE OUTSIDE DIAMETER OF THE SEWER PIPE, BUT NOT LESS THAN FOUR (4) INCHES NOR MORE THAN EIGHT (8) INCHES. MATERIAL SHALL BE CA-7, CA-11 OR CA-13 AND SHALL BE EXTENDED AT LEAST 12" ABOVE THE TOP OF THE PIPE WHEN USING PVC.
9. NON-SHEAR FLEXIBLE-TYPE COUPLINGS SHALL BE USED IN THE CONNECTION OF SEWER PIPES OF DISSIMILAR PIPE MATERIALS.
10. ALL MANHOLES SHALL BE PROVIDED WITH BOLTED, WATERTIGHT COVERS, SANITARY LIDS SHALL BE CONSTRUCTED WITH A CONCEALED PICKHOLE AND WATERTIGHT GASKET WITH THE WORD "SANITARY" CAST INTO THE LID.
11. WHEN CONNECTING TO AN EXISTING SEWER MAIN BY MEANS OTHER THAN AN EXISTING WYE, TEE, OR AN EXISTING MANHOLE, ONE OF THE FOLLOWING METHODS SHALL BE USED:
 - a) A CIRCULAR SAW-CUT OF SEWER MAIN BY PROPER TOOLS AND PROPER INSTALLATION OF HUB-WYE SADDLE OR HUB-TEE SADDLE.
 - b) REMOVE AN ENTIRE SECTION OF PIPE (BREAKING ONLY THE TOP OF ONE BELL) AND REPLACE WITH A WYE OR TEE BRANCH SECTION.
 - c) WITH PIPE CUTTER, NEATLY AND ACCURATELY CUT OUT DESIRED LENGTH OF PIPE FOR INSERTION OF PROPER FITTING, USING COUPLINGS TO HOLD IT FIRMLY IN PLACE.
12. WHENEVER A SANITARY/COMBINED SEWER CROSSES UNDER A WATERMAIN, THE MINIMUM VERTICAL DISTANCE FROM THE TOP OF THE SEWER TO THE BOTTOM OF THE WATERMAIN SHALL BE 18 INCHES. FURTHERMORE, A MINIMUM HORIZONTAL DISTANCE OF 10 FEET BETWEEN SANITARY/COMBINED SEWERS AND WATERMANS SHALL BE MAINTAINED UNLESS: THE SEWER IS LAID IN A SEPARATE TRENCH, KEEPING A MINIMUM 18" VERTICAL SEPARATION; OR THE SEWER IS LAID IN THE SAME TRENCH WITH THE WATERMAIN LOCATED AT THE OPPOSITE SIDE ON A BENCH OF UNDISTURBED EARTH, KEEPING A MINIMUM 18" VERTICAL SEPARATION. IF EITHER THE VERTICAL OR HORIZONTAL DISTANCES DESCRIBED CANNOT BE MAINTAINED, OR THE SEWER CROSSES ABOVE THE WATERMAIN, THE SEWER SHALL BE CONSTRUCTED TO WATERMAIN STANDARDS OR IT SHALL BE ENCASED WITH A WATERMAIN QUALITY CARRIER PIPE WITH THE ENDS SEALED.
13. ALL EXISTING SEPTIC SYSTEMS SHALL BE ABANDONED. ABANDONED TANKS SHALL BE FILLED WITH GRANULAR MATERIAL OR REMOVED.
14. ALL SANITARY MANHOLES, (AND STORM MANHOLES IN COMBINED SEWER AREAS), SHALL HAVE A MINIMUM INSIDE DIAMETER OF 48 INCHES, AND SHALL BE CAST IN PLACE OR PRE-CAST REINFORCED CONCRETE.
15. ALL SANITARY MANHOLES, (AND STORM MANHOLES IN COMBINED SEWER AREAS), SHALL HAVE PRECAST "RUBBER BOOTS" THAT CONFORM TO ASTM C-923 FOR ALL PIPE CONNECTIONS. PRECAST SECTIONS SHALL CONSIST OF MODIFIED GROOVE TONGUE AND RUBBER GASKET TYPE JOINTS.
16. ALL ABANDONED SANITARY SEWERS SHALL BE PLUGGED AT BOTH ENDS WITH AT LEAST 2 FEET LONG NON-SHRINK CONCRETE OR MORTAR PLUG.
17. EXCEPT FOR FOUNDATION/FOOTING DRAINS PROVIDED TO PROTECT BUILDINGS, OR PERFORATED PIPES ASSOCIATED WITH VOLUME CONTROL FACILITIES, DRAIN TILES/FIELD TILES/UNDERDRAINS/PERFORATED PIPES ARE NOT ALLOWED TO BE CONNECTED TO OR TRIBUTARY TO COMBINED SEWERS, SANITARY SEWERS, OR STORM SEWERS TRIBUTARY TO COMBINED SEWERS IN COMBINED SEWER AREAS. CONSTRUCTION OF NEW FACILITIES OF THIS TYPE IS PROHIBITED; AND ALL EXISTING DRAIN TILES AND PERFORATED PIPES ENCOUNTERED WITHIN THE PROJECT AREA SHALL BE PLUGGED OR REMOVED, AND SHALL NOT BE CONNECTED TO COMBINED SEWERS, SANITARY SEWERS, OR STORM SEWERS TRIBUTARY TO COMBINED SEWERS.
18. A BACKFLOW PREVENTER IS REQUIRED FOR ALL DETENTION BASINS TRIBUTARY TO COMBINED SEWERS. REQUIRED BACKFLOW PREVENTERS SHALL BE INSPECTED AND EXERCISED ANNUALLY BY THE PROPERTY OWNER TO ENSURE PROPER OPERATION, AND ANY NECESSARY MAINTENANCES SHALL BE PERFORMED TO ENSURE FUNCTIONALITY. IN THE EVENT OF A SEWER SURCHARGE INTO AN OPEN DETENTION BASIN TRIBUTARY TO COMBINED SEWERS, THE PERMITTEE SHALL ENSURE THAT CLEAN UP AND WASH OUT OF SEWAGE TAKES PLACE WITHIN 48 HOURS OF THE STORM EVENT.

e. EROSION AND SEDIMENT CONTROL

1. THE CONTRACTOR SHALL INSTALL THE EROSION AND SEDIMENT CONTROL DEVICES AS SHOWN ON THE APPROVED EROSION AND SEDIMENT CONTROL PLAN.
2. EROSION AND SEDIMENT CONTROL PRACTICES SHALL BE FUNCTIONAL PRIOR TO HYDROLOGIC DISTURBANCE OF THE SITE.
3. ALL DESIGN CRITERIA, SPECIFICATIONS, AND INSTALLATION OF EROSION AND SEDIMENT CONTROL PRACTICES SHALL BE IN ACCORDANCE WITH THE ILLINOIS URBAN MANUAL.
4. A COPY OF THE APPROVED EROSION AND SEDIMENT CONTROL PLAN SHALL BE MAINTAINED ON THE SITE AT ALL TIMES.
5. INSPECTIONS AND DOCUMENTATION SHALL BE PERFORMED, AT A MINIMUM:
 - a) UPON COMPLETION OF INITIAL EROSION AND SEDIMENT CONTROL MEASURES, PRIOR TO ANY SOIL DISTURBANCE.
 - b) ONCE EVERY SEVEN (7) CALENDAR DAYS AND WITHIN 24 HOURS OF THE END OF A STORM EVENT WITH GREATER THAN 0.5 INCH OF RAINFALL OR LIQUID EQUIVALENT PRECIPITATION.
6. SOIL DISTURBANCE SHALL BE CONDUCTED IN SUCH A MANNER AS TO MINIMIZE EROSION. IF STRIPPING, CLEARING, GRADING, OR LANDSCAPING ARE TO BE DONE IN PHASES, THE CO-PERMITTEE SHALL PLAN FOR APPROPRIATE SOIL EROSION AND SEDIMENT CONTROL MEASURES.
7. A STABILIZED MAT OF CRUSHED STONE MEETING THE STANDARDS OF THE ILLINOIS URBAN MANUAL SHALL BE INSTALLED AT ANY POINT WHERE TRAFFIC WILL BE ENTERING OR LEAVING A CONSTRUCTION SITE. SEDIMENT OR SOIL REACHING AN IMPROVED PUBLIC RIGHT-OF-WAY, STREET, ALLEY OR PARKING AREA SHALL BE REMOVED BY SCRAPING OR STREET CLEANING AS ACCUMULATIONS WARRANT AND TRANSPORTED TO A CONTROLLED SEDIMENT DISPOSAL AREA.
8. CONCRETE WASHOUT FACILITIES SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE ILLINOIS URBAN MANUAL AND SHALL BE INSTALLED PRIOR TO ANY ON SITE CONSTRUCTION ACTIVITIES INVOLVING CONCRETE.
9. MORTAR WASHOUT FACILITIES SHALL BE CONSTRUCTED IN ADDITION TO CONCRETE WASHOUT FACILITIES FOR ANY BRICK AND MORTAR BUILDING ENVELOPE CONSTRUCTION ACTIVITIES.
10. TEMPORARY DIVERSIONS SHALL BE CONSTRUCTED AS NECESSARY TO DIRECT ALL RUNOFF FROM HYDROLOGICALLY DISTURBED AREAS TO AN APPROPRIATE SEDIMENT TRAP OR BASIN. VOLUME CONTROL FACILITIES SHALL NOT BE USED AS TEMPORARY SEDIMENT BASINS.
11. DISTURBED AREAS OF THE SITE WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED SHALL BE STABILIZED WITH TEMPORARY OR PERMANENT MEASURES WITHIN SEVEN (7) DAYS.
12. ALL FLOOD PROTECTION AREAS AND VOLUME CONTROL FACILITIES SHALL, AT A MINIMUM, BE PROTECTED WITH A DOUBLE-ROW OF SILT FENCE (OR EQUIVALENT).
13. VOLUME CONTROL FACILITIES SHALL NOT BE CONSTRUCTED UNTIL ALL OF THE CONTRIBUTING DRAINAGE AREA HAS BEEN STABILIZED.
14. SOIL STOCKPILES SHALL, AT A MINIMUM, BE PROTECTED WITH PERIMETER SEDIMENT CONTROLS. SOIL STOCKPILES SHALL NOT BE PLACED IN FLOOD PROTECTION AREAS OR THEIR BUFFERS.
15. EARTHEN EMBANKMENT SIDE SLOPES SHALL BE STABILIZED WITH APPROPRIATE EROSION CONTROL BLANKET.
16. STORM SEWERS THAT ARE OR WILL BE FUNCTIONING DURING CONSTRUCTION SHALL BE PROTECTED BY APPROPRIATE SEDIMENT CONTROL MEASURES.
17. THE CONTRACTOR SHALL EITHER REMOVE OR REPLACE ANY EXISTING DRAIN TILES AND INCORPORATE THEM INTO THE DRAINAGE PLAN FOR THE DEVELOPMENT. DRAIN TILES CANNOT BE TRIBUTARY TO A SANITARY OR COMBINED SEWER. DRAIN TILES ALLOWED IN COMBINED SEWER AREA FOR GREEN INFRASTRUCTURE PRACTICES.
18. IF DEWATERING SERVICES ARE USED, ADJOINING PROPERTIES AND DISCHARGE LOCATIONS SHALL BE PROTECTED FROM EROSION AND SEDIMENTATION. DEWATERING SYSTEMS SHOULD BE INSPECTED DAILY DURING OPERATIONAL PERIODS. THE SITE INSPECTOR MUST BE PRESENT AT THE COMMENCEMENT OF DEWATERING ACTIVITIES.
19. THE CONTRACTOR SHALL BE RESPONSIBLE FOR TRENCH DEWATERING AND EXCAVATION FOR THE INSTALLATION OF SANITARY SEWERS, STORM SEWERS, WATERMANS AS WELL AS THEIR SERVICES AND OTHER APPURTENANCES. ANY TRENCH DEWATERING, WHICH CONTAINS SEDIMENT SHALL PASS THROUGH A SEDIMENT SETTLING POND OR EQUALLY EFFECTIVE SEDIMENT CONTROL DEVICE. ALTERNATIVES MAY INCLUDE DEWATERING INTO A SUMP PIT, FILTER BAG OR EXISTING VEGETATED UPSLOPE AREA. SEDIMENT LADEN WATERS SHALL NOT BE DISCHARGED TO WATERWAYS, FLOOD PROTECTION AREAS OR THE COMBINED SEWER SYSTEM.
20. ALL PERMANENT EROSION CONTROL PRACTICES SHALL BE INITIATED WITHIN SEVEN (7) DAYS FOLLOWING THE COMPLETION OF SOIL DISTURBING ACTIVITIES.
21. ALL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE MAINTAINED AND REPAIRED AS NEEDED ON A YEAR-ROUND BASIS DURING CONSTRUCTION AND ANY PERIODS OF CONSTRUCTION SHUTDOWN UNTIL PERMANENT STABILIZATION IS ACHIEVED.
22. ALL TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES SHALL BE REMOVED WITHIN THIRTY (30) DAYS AFTER PERMANENT SITE STABILIZATION.
23. THE EROSION AND SEDIMENT CONTROL MEASURES SHOWN ON THE PLANS ARE THE MINIMUM REQUIREMENTS. ADDITIONAL MEASURES MAY BE REQUIRED, AS DIRECTED BY THE ENGINEER, SITE INSPECTOR, OR MWRD.

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave L&FO\Details.dwg Mar 07, 2022 - 11:01am

 <p>HANCOCK ENGINEERING 1994 State of Illinois Established 1911</p>	<p>◆ Civil Engineers ◆ Municipal Consultants ◆ Established 1911</p>	<p>1999 Roosevelt Road Woodstock, IL 60184-2700 Phone: 708.946.0300 www.hancockeng.com</p>
	DESIGNED -- --	REVISED --
	DRAWN -- ECW, SFB, DMM	REVISED --
	CHECKED -- --	REVISED --
DATE -- 11-17-21	REVISED -- 2-15-22 I.D.O.T.	

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

M.W.R.D.G.C. GENERAL NOTES

SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. - TO STA. -

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	3
CONTRACT NO. 61H70				
FED. ROAD DIST. NO. 1 ILLINOIS			FED. AID PROJECT Z3Q2(622)	

E.H.E. PROJECT NO. 1252100601

SUMMARY OF QUANTITIES

		Code No.	Item	Unit	Total Quantity	Const. Type Code 0021 80%Federal 20%Local	Const. Type Code 0042 80%Federal 20%Local
		20101100	TREE TRUNK PROTECTION	EACH	65	65	
	*	20101200	TREE ROOT PRUNING	EACH	10	10	
		20800150	TRENCH BACKFILL	CU YD	100	100	
		21101615	TOPSOIL FURNISH AND PLACE, 4"	SQ YD	3500	3500	
	*	25200100	SODDING	SQ YD	3500	3500	
	*	25200200	SUPPLEMENTAL WATERING	UNIT	94	94	
		28000250	TEMPORARY EROSION CONTROL SEEDING	POUND	73	73	
		28000510	INLET FILTERS	EACH	50	50	
		35300300	PORTLAND CEMENT CONCRETE BASE COURSE 8"	SQ YD	125	125	
		40201000	AGGREGATE FOR TEMPORARY ACCESS	TON	30	30	
		40600290	BITUMINOUS MATERIALS (TACK COAT)	POUND	14400	14400	
		40600400	MIXTURE FOR CRACKS, JOINTS, AND FLANGEWAYS	TON	25	25	
		40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SQ YD	350	350	
		40602978	HOT-MIX ASPHALT BINDER COURSE, IL-9.5, N50	TON	1500	1500	
		40604060	HOT-MIX ASPHALT SURFACE COURSE, IL-9.5, MIX "D", N50	TON	2000	2000	
		40800050	INCIDENTAL HOT-MIX ASPHALT SURFACING	TON	15	15	

SEE SPECIAL PROVISIONS

* INDICATES SPECIALTY ITEM

Drawing File: W:\Projects\by_Mileage\Brookfield\12521006 - Washington Ave L&P\Drawings.dwg Apr 13, 2022 - 9:23am



9933 Roosevelt Road
 Westchester, IL 60154-2730
 Phone: 708-865-0000
 www.hancock.com

DESIGNED --	REvised --
DRAWN -- ECW, SFB, DMM	REvised --
CHECKED --	REvised -- 4-13-22 I.D.O.T.
DATE -- 11-17-21	REvised -- 2-15-22 I.D.O.T.

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SUMMARY OF QUANTITIES

SCALE: NONE SHEET NO. 1 OF 4 SHEETS STA. - TO STA. -

F.A.U. RTE. 1472	SECTION 21-00135-00-RS	COUNTY COOK	TOTAL SHEETS 27	SHEET NO. 4
FED. ROAD DIST. NO. 1 ILLINOIS			CONTRACT NO. 61H70	
FED. AID PROJECT Z3Q2(622)			E.H.E. PROJECT NO. 1252100601	

SUMMARY OF QUANTITIES

		Code No.	Item	Unit	Total Quantity	Const. Type Code 0021 80%Federal 20%Local	Const. Type Code 0042 80%Federal 20%Local
		4200300	PORTLAND CEMENT CONCRETE PAVEMENT 8"	SQ YD	225	225	
		42001300	PROTECTIVE COAT	SQ YD	2400	2400	
		42300300	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 7 INCH	SQ YD	650	650	
		42400200	PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH	SQ FT	12500	12500	
		42400800	DETECTABLE WARNINGS	SQ FT	1040	1040	
		44000100	PAVEMENT REMOVAL	SQ YD	350	350	
		44000200	DRIVEWAY PAVEMENT REMOVAL	SQ YD	650	650	
		44000500	COMBINATION CURB AND GUTTER REMOVAL	FOOT	3000	3000	
		44000600	SIDEWALK REMOVAL	SQ FT	12500	12500	
		44200929	CLASS B PATCHES, TYPE I, 8 INCH	SQ YD	100	100	
		44200934	CLASS B PATCHES, TYPE II, 8 INCH	SQ YD	150	150	
		44200942	CLASS B PATCHES, TYPE III, 8 INCH	SQ YD	250	250	
		44200944	CLASS B PATCHES, TYPE IV, 8 INCH	SQ YD	500	500	
		44201297	DOWEL BARS 1"	EACH	800	800	
		44213200	SAW CUTS	FOOT	2000	2000	
		56500600	DOMESTIC WATER SERVICE BOXES TO BE ADJUSTED	EACH	10	10	

SEE SPECIAL PROVISIONS

* INDICATES SPECIALTY ITEM

Drawing file: W:\Projects_by_Mileage\Bromfield\12521006 - Washington Ave L&D\Detail.dwg Mar 23, 2022 - 1:17pm



5037 Years of
 Experience
 ♦ Civil Engineers
 ♦ Municipal Consultants
 ♦ Established 1911
 1933 Roosevelt Road
 Westchester, IL 60154-2780
 Phone: 708-863-0300
 www.hancock.com

DESIGNED - -	REVISED - -
DRAWN - - ECW, SFB, DMM	REVISED - -
CHECKED - -	REVISED - -
DATE - - 11-17-21	REVISED - - 2-15-22 I.D.O.T.

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SUMMARY OF QUANTITIES

SCALE: NONE | SHEET NO. 2 OF 4 SHEETS | STA. - TO STA. -

F.A.U. RTE. 1472	SECTION 21-00135-00-RS	COUNTY COOK	TOTAL SHEETS 27	SHEET NO. 5
CONTRACT NO. 61H70			FED. AID PROJECT Z3Q2(622)	
E.H.E. PROJECT NO. 1252100601				

SUMMARY OF QUANTITIES

		Code No.	Item	Unit	Total Quantity	Const. Type Code 0021 80%Federal 20%Local	Const. Type Code 0042 80%Federal 20%Local
		60604100	COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12 (MODIFIED)	FOOT	3000	3000	
		60218400	MANHOLES , TYPE A, 4'-DIAMETER, TYPE 1 FRAME, CLOSED LID	EACH	4	4	
		60250400	CATCH BASINS TO BE ADJUSTED WITH NEW TYPE 1 FRAME, OPEN LID	EACH	4	4	
		60255800	MANHOLES TO BE ADJUSTED WITH NEW TYPE 1 FRAME, CLOSED LID	EACH	4	4	
		60265900	VALVE VAULTS TO BE ADJUSTED WITH NEW TYPE 1 FRAME, CLOSED LID	EACH	2	2	
		60300305	FRAMES AND LIDS TO BE ADJUSTED	EACH	10	10	
		67100100	MOBILIZATION	L SUM	1	1	
		70102620	TRAFFIC CONTROL AND PROTECTION, STANDARD 701501	L SUM	1	1	
		70102635	TRAFFIC CONTROL AND PROTECTION, STANDARD 701701	L SUM	1	1	
		70102640	TRAFFIC CONTROL AND PROTECTION, STANDARD 701801	L SUM	1	1	
		70300100	SHORT TERM PAVEMENT MARKING	FOOT	1068	1068	
		70300150	SHORT TERM PAVEMENT MARKING REMOVAL	SQ FT	356	356	
	*	72000100	SIGN PANEL - TYPE 1	SQ FT	40	40	
	*	72900100	METAL POST - TYPE A	FOOT	125	125	
	*	78000100	THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	400	400	
	*	78000200	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT	1000	1000	

SEE SPECIAL PROVISIONS

* INDICATES SPECIALTY ITEM

Drawing file: W:\Projects\by_Village\Bioscience\12521006 - Washington Ave L&T\Delisted.dwg May 03, 2022 - 9:31am



♦ Civil Engineers
 ♦ Municipal Consultants
 ♦ Established 1911

1933 Roosevelt Road
 Westchester, IL 60154-2760
 Phone: 708-665-0300
 www.hancock.com

DESIGNED --	REvised --
DRAWN -- ECW, SFB, DMM	REvised --
CHECKED --	REvised -- 5-2-22 I.D.O.T.
DATE -- 11-17-21	REvised -- 2-15-22 I.D.O.T.

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUMMARY OF QUANTITIES

SCALE: NONE SHEET NO. 2 OF 4 SHEETS STA. - TO STA. -

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-R5	COOK	27	6
FED. ROAD DIST. NO. 1 ILLINOIS			CONTRACT NO. 61H70	
FED. AID PROJECT Z3Q2(622)			E.H.E. PROJECT NO. 12521006/01	

SUMMARY OF QUANTITIES

		Code No.	Item	Unit	Total Quantity	Const. Type Code 0021 80%Federal 20%Local	Const. Type Code 0042 80%Federal 20%Local
	*	78000400	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	8000	8000	
	*	78000600	THERMOPLASTIC PAVEMENT MARKING - LINE 12"	FOOT	150	150	
	*	78000650	THERMOPLASTIC PAVEMENT MARKING - LINE 24"	FOOT	350	350	
		X0325207	TELEVISION INSEPCION OF SEWER	FOOT	3500	3500	
		X4401198	HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH	SQ YD	15650	15650	
		X6020399	CONNECTION TO EXISTING MANHOLE	EACH	2	2	
		X6030310	FRAMES AND LIDS TO BE ADJUSTED (SPECIAL)	EACH	25	25	
		XX005634	12" X 6" PVC SEWER SERVICE CONNECTIONS	EACH	2	2	
		XX006449	PVC COMBINED SEWER PIPE REPLACEMENT 12"	FOOT	66	66	
		XX006450	PVC COMBINED SEWER PIPE REPLACEMENT 15"	FOOT	44	44	
		XX006452	15" X 6" PVC SEWER SERVICE CONNECTIONS	EACH	1	1	
		XX006453	6" PVC SEWER SERVICE PIPE REPAIR ACROSS TRENCH	FOOT	18	18	
		XX007785	SURFACE REMOVAL (SPECIAL)	SQ YD	75	75	
		Z0030850	TEMPORARY INFORMATION SIGNING	SQFT	52	52	
		Z0076600	TRAINEES	HOUR	500		500
		Z0076604	TRAINEES TRAINING PROGRAM GRADUATE	HOUR	500		500

SEE SPECIAL PROVISIONS

* INDICATES SPECIALTY ITEM

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave L&P\Details.dwg May 03, 2022 - 9:21am

HANCOCK ENGINEERING
40th Years of Experience

- ◆ Civil Engineers
- ◆ Municipal Consultants
- ◆ Established 1911

1933 Roosevelt Road
 Waukegan, IL 60154-2790
 Phone: 708-665-0300
 www.hancock.com


DESIGNED --	REVISED --
DRAWN -- ECW, SFB, DMM	REVISED --
CHECKED --	REVISED -- 5-2-22 I.D.O.T.
DATE -- 11-17-21	REVISED -- 2-15-22 I.D.O.T.

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

SUMMARY OF QUANTITIES


SCALE: NONE | SHEET NO. 2 OF 4 SHEETS | STA. - TO STA. -

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	7
FED. ROAD DIST. NO. 1 ILLINOIS			CONTRACT NO. 61H70	
FED. AID PROJECT Z3Q2(622)			E.H.E. PROJECT NO. 1252100601	

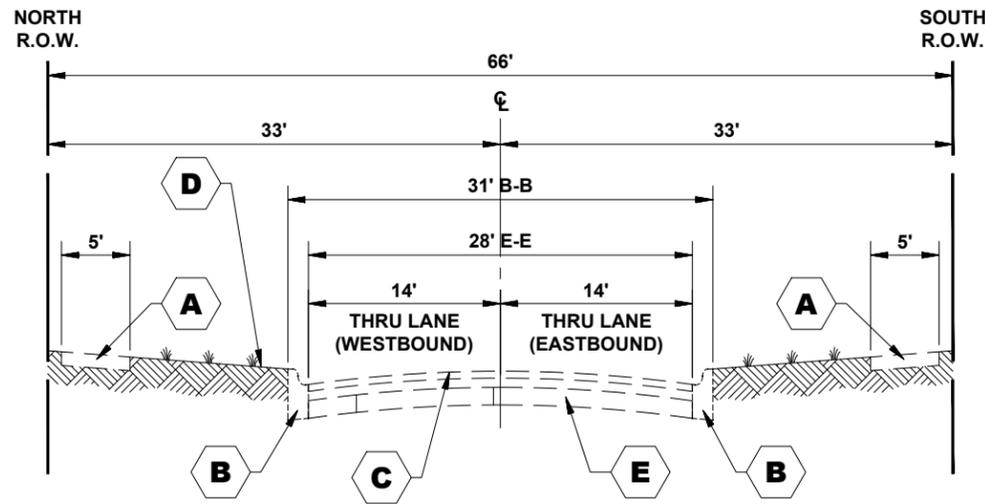

EXISTING TYPICAL SECTION

WASHINGTON AVENUE
(STATION 1+00 TO STATION 24+17)

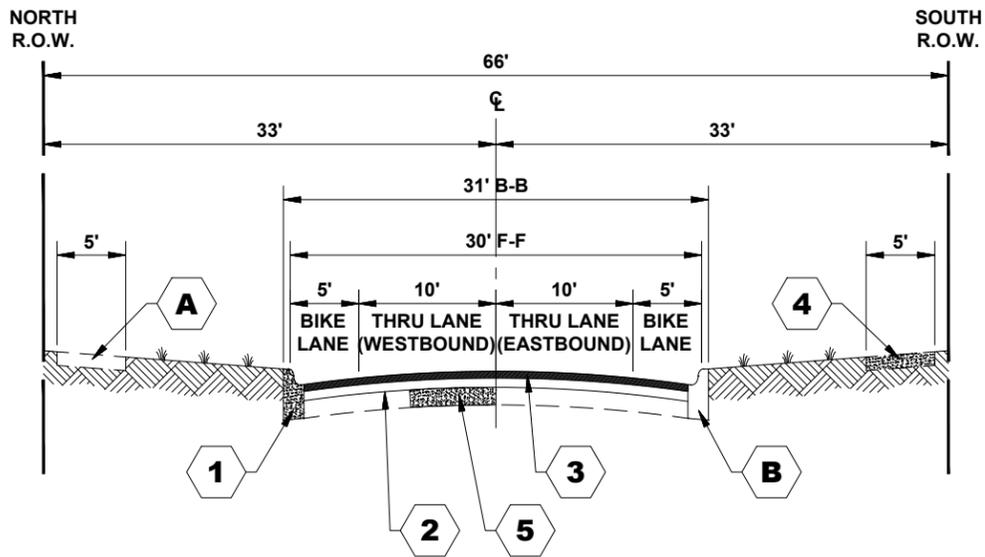

PROPOSED TYPICAL SECTION

WASHINGTON AVENUE
(STATION 1+00 TO STATION 24+17)


TYPICAL SECTION LEGEND

EXISTING

- A** PORTLAND CEMENT CONCRETE SIDEWALK, 5"
- B** COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12
- C** BITUMINOUS CONCRETE BINDER AND SURFACE COURSE, 3" - 4"
- D** SODDED PARKWAY
- E** PORTLAND CEMENT CONCRETE BASE COURSE, 8"


PROPOSED

- 1** PROPOSED INTERMITTENT COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT, TYPE B-6.12 (MODIFIED)
- 2** HOT-MIX ASPHALT BINDER COURSE, IL 9.5, N50, 1.5"
- 3** HOT-MIX ASPHALT SURFACE COURSE, IL - 9.5, MIX D, N50, 2"
- 4** PROPOSED INTERMITTENT PORTLAND CEMENT CONCRETE SIDEWALK, 5"
- 5** CLASS B PATCH, 8"

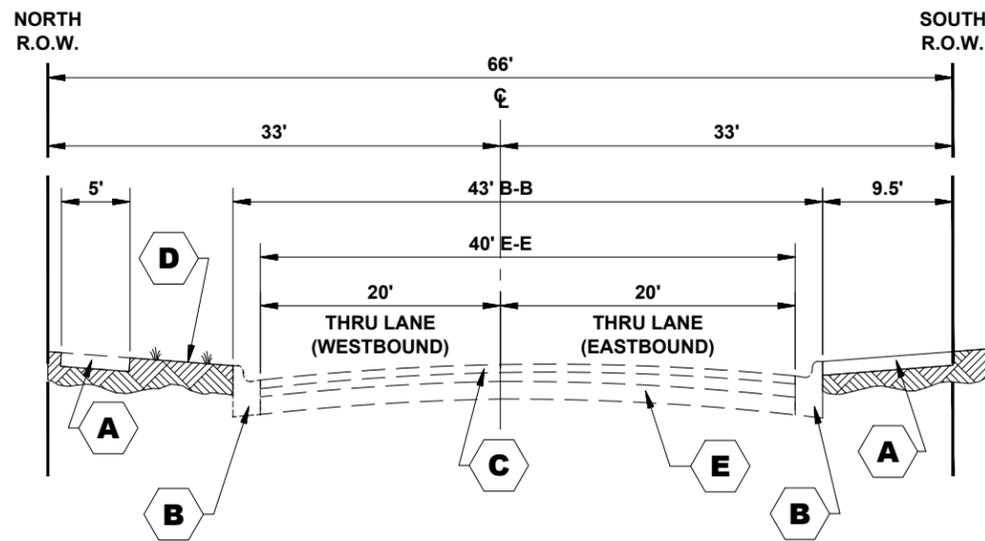

EXISTING TYPICAL SECTION

WASHINGTON AVENUE
(STATION 24+17 TO STATION 26+17)

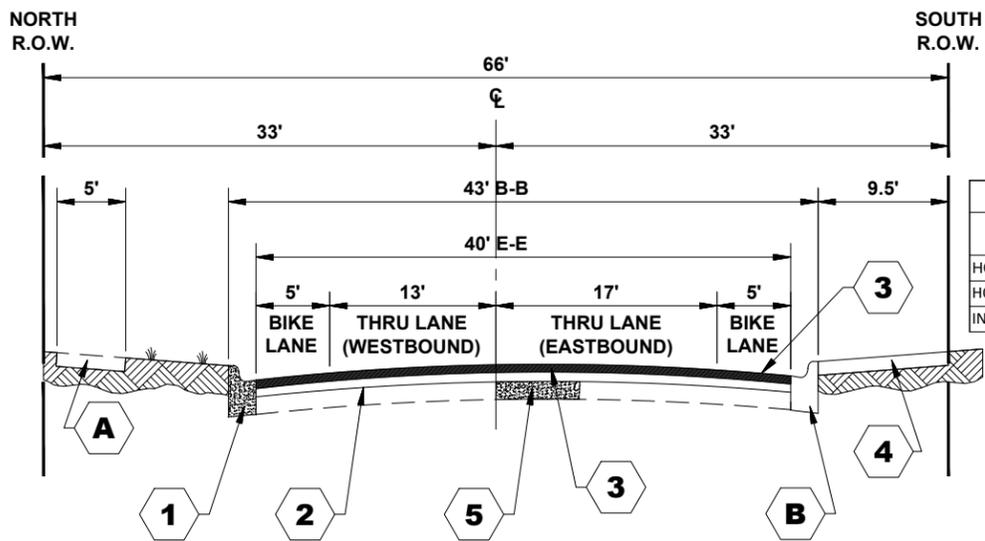

PROPOSED TYPICAL SECTION

WASHINGTON AVENUE
(STATION 24+17 TO STATION 26+17)

HOT-MIX ASPHALT (HMA) MIXTURE REQUIREMENTS		
MIXTURE TYPE	AIR VOIDS @ Ndes	QMP
HOT-MIX ASPHALT SURFACE COURSE, IL - 9.5, MIX D, N50, 2"	4% @ 50 Gyr	LR 1030-2
HOT-MIX ASPHALT BINDER COURSE, IL - 9.5, N50, 1.5"	4% @ 50 Gyr	LR 1030-2
INCIDENTAL HOT-MIX ASPHALT SURFACING (HMA SURFACE, IL - 9.5, MIX D, N50, 3"	4% @ 50 Gyr	LR 1030-2

THE UNIT WEIGHT USED TO CALCULATE ALL HMA SURFACE MIXTURE QUANTITIES IS 112 LBS/SQ YD/IN
THE "AC TYPE" FOR POLYMERIZED HMA MIXES SHALL BE "SBS/SBR PG 76-22" AND FOR NON-POLYMERIZED HMA THE "AC TYPE" SHALL BE "PG 64-22" UNLESS MODIFIED BY RECLAIMED MATERIALS SPECIFICATIONS

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave L&D\Details.dwg Mar 07, 2022 - 11:02am



Civil Engineers
Municipal Consultants
Established 1911

1999 Roosevelt Road
Westchester, IL 60154-2700
Phone: 708.665.0000
www.hancock.com

DESIGNED - -	REVISED - -
DRAWN - ECW, SFB, DMM	REVISED - -
CHECKED - -	REVISED - -
DATE - 11-17-21	REVISED - 2-15-22 I.D.O.T.


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

EXISTING AND PROPOSED
TYPICAL SECTIONS


SCALE: NONE SHEET NO. 1 OF 2 SHEETS STA. - TO STA. -

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	8
CONTRACT NO. 61H70			FED. AID PROJECT Z3Q2(622)	

E.H.E. PROJECT NO. 1252100601

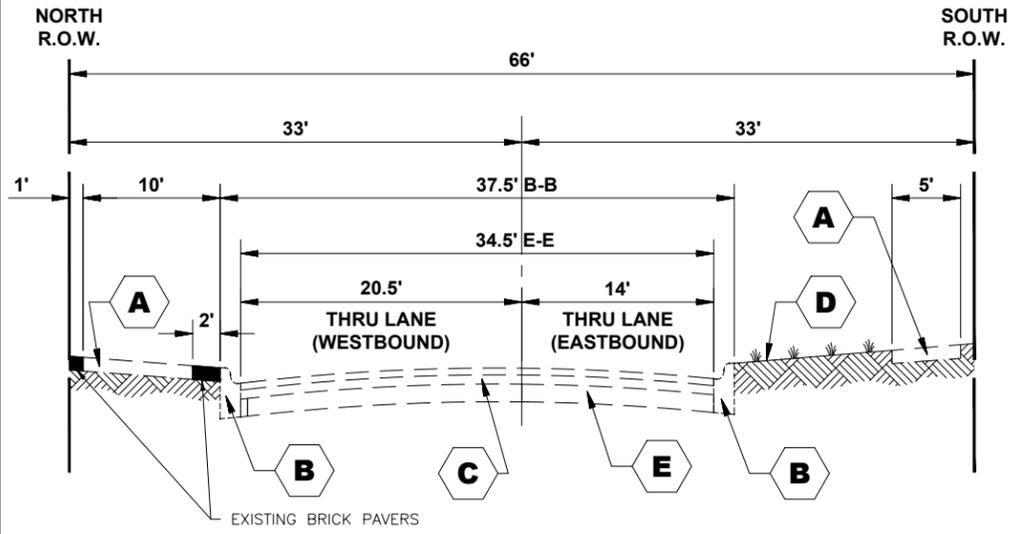

EXISTING TYPICAL SECTION
 WASHINGTON AVENUE
 (STATION 28+38 TO 30+30)

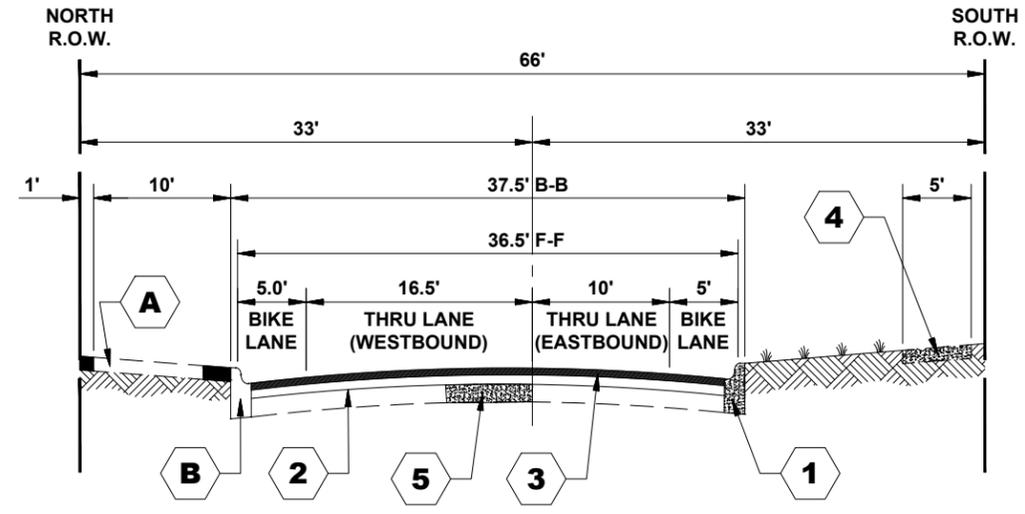

PROPOSED TYPICAL SECTION
 WASHINGTON AVENUE
 (STATION 28+38 TO 30+30)


TYPICAL SECTION LEGEND

EXISTING


- A** PORTLAND CEMENT CONCRETE SIDEWALK, 5"
- B** COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12
- C** BITUMINOUS CONCRETE BINDER AND SURFACE COURSE, 3" - 4"
- D** SODDED PARKWAY
- E** PORTLAND CEMENT CONCRETE BASE COURSE, 8"

PROPOSED

- 1** PROPOSED INTERMITTENT COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT, TYPE B-6.12 (MODIFIED)
- 2** HOT-MIX ASPHALT BINDER COURSE, IL - 9.5, N50, 1.5"
- 3** HOT-MIX ASPHALT SURFACE COURSE, IL - 9.5, MIX D, N50, 2"
- 4** PROPOSED INTERMITTENT PORTLAND CEMENT CONCRETE SIDEWALK, 5"
- 5** CLASS B PATCH, 8"

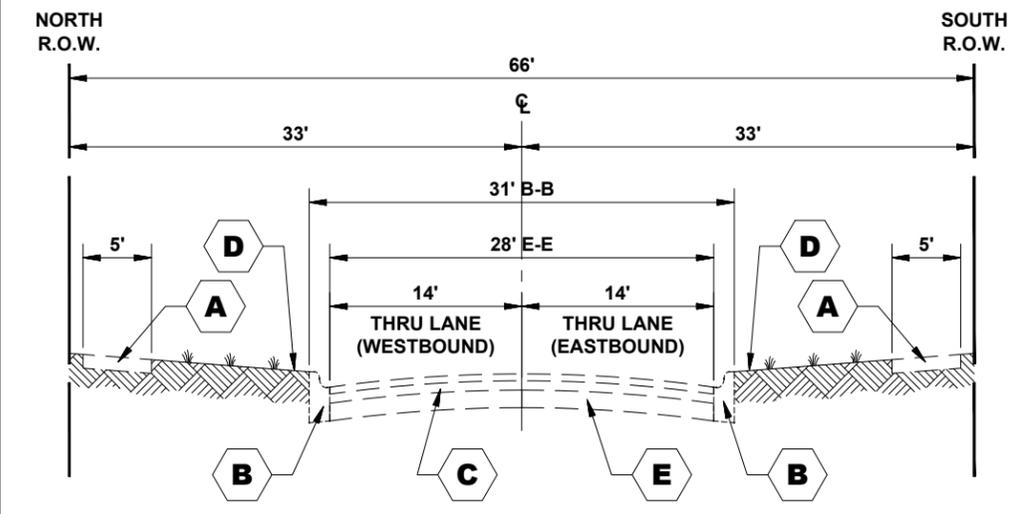

EXISTING TYPICAL SECTION
 (STATION 30+30 TO 47+16)

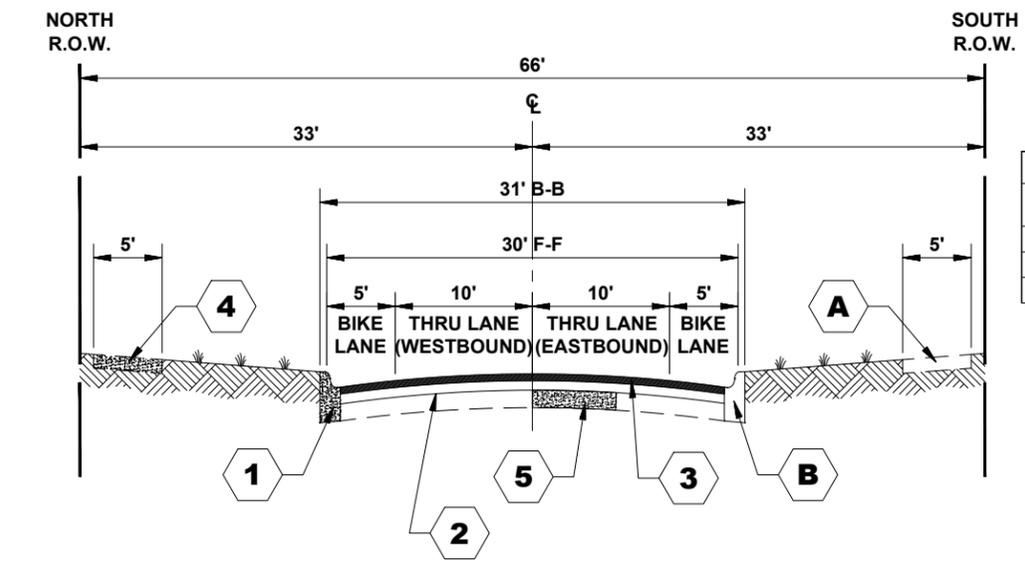

PROPOSED TYPICAL SECTION
 WASHINGTON AVENUE
 (STATION 30+30 TO 47+16)

HOT-MIX ASPHALT (HMA) MIXTURE REQUIREMENTS		
MIXTURE TYPE	AIR VOIDS @ Ndes	QMP
HOT-MIX ASPHALT SURFACE COURSE, IL - 9.5, MIX D, N50, 2"	4% @ 50 Gyr	LR 1030-2
HOT-MIX ASPHALT BINDER COURSE, IL - 9.5, N50, 1.5"	4% @ 50 Gyr	LR 1030-2
INCIDENTAL HOT-MIX ASPHALT SURFACING (HMA SURFACE, IL - 9.5, MIX D, N50, 3")	4% @ 50 Gyr	LR 1030-2

THE UNIT WEIGHT USED TO CALCULATE ALL HMA SURFACE MIXTURE QUANTITIES IS 112 LBS/SQ YD/IN
 THE "AC TYPE" FOR POLYMERIZED HMA MIXES SHALL BE "SBS/SBR PG 76-22" AND FOR NON-POLYMERIZED HMA THE "AC TYPE" SHALL BE "PG 64-22" UNLESS MODIFIED BY RECLAIMED MATERIALS SPECIFICATIONS

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave L&D\Details.dwg Mar 07, 2022 - 11:02am

HANCOCK ENGINEERING
 1000 West of Brookfield
 1990 Roosevelt Road
 Westchester, IL 60154-2700
 Phone: 708.665.0000
 www.hancock.com

◆ Civil Engineers
 ◆ Municipal Consultants
 ◆ Established 1911

DESIGNED - -	REVISED - -
DRAWN - ECW, SFB, DMM	REVISED - -
CHECKED - -	REVISED - -
DATE - 11-17-21	REVISED - 2-15-22 I.D.O.T.


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

EXISTING AND PROPOSED TYPICAL SECTIONS
 SCALE: NONE SHEET NO. 2 OF 2 SHEETS STA. - TO STA. -

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	9
CONTRACT NO. 61H70				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT Z3Q2(622)				

E.H.E. PROJECT NO. 1252100601

PROJECT BEGINS
STATION 1+00.00
WASHINGTON AVENUE

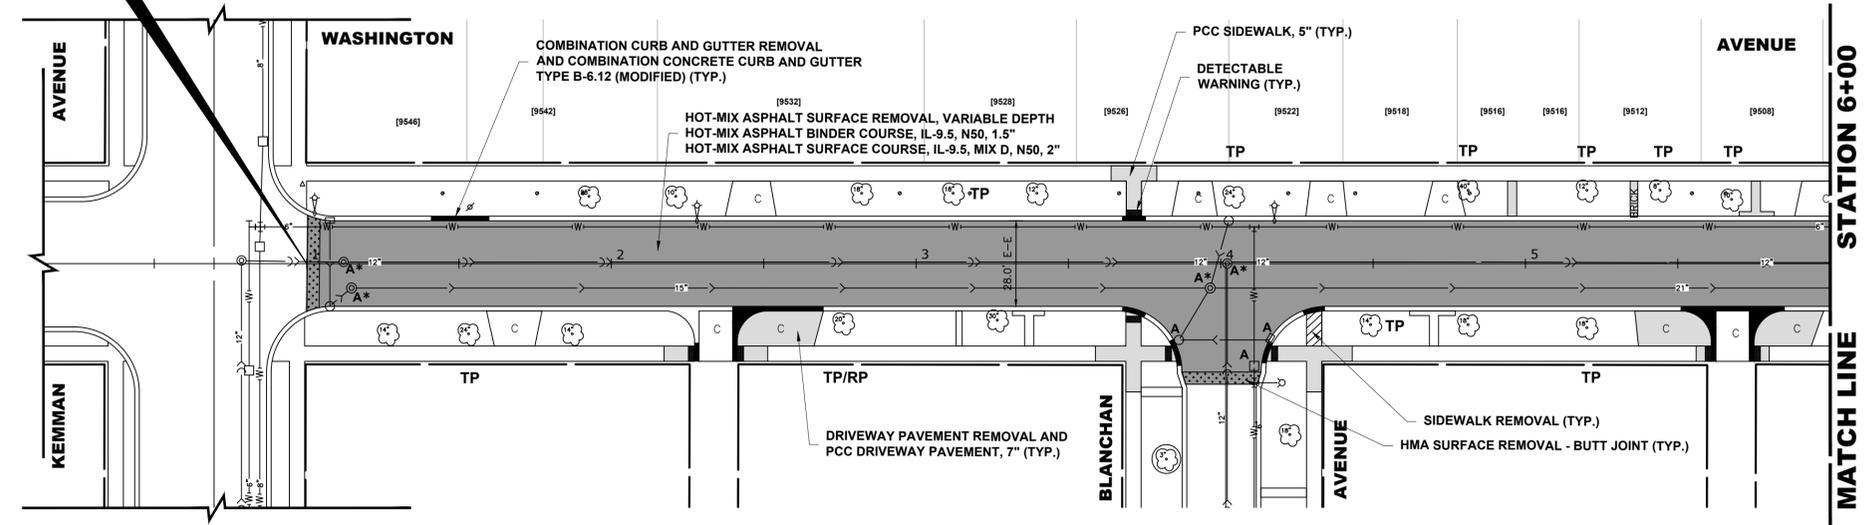


PROPOSED IMPROVEMENTS

LEGEND OF SYMBOLS

(TO BE USED IN CONJUNCTION WITH I.D.O.T. STANDARD 000001-07)

- | SYMBOL | DESCRIPTION |
|-------------|---|
| [A] | EXISTING HOT-MIX ASPHALT AREA |
| [C] | EXISTING CONCRETE AREA |
| [G] | EXISTING GRASS AREA |
| [+] | PROPOSED HOT-MIX ASPHALT BUTT JOINT |
| [Brick] | REMOVE AND REINSTALL BRICK PAVER |
| [Grey] | PROPOSED CONCRETE AREA, 5" SIDEWALK, 7" DRIVEWAY |
| [Dark Grey] | PROPOSED HOT-MIX ASPHALT RESURFACING AREA |
| A | STRUCTURE TO BE ADJUSTED |
| A* | STRUCTURE TO BE ADJUSTED (SPECIAL) |
| AH | HANDHOLE TO BE ADJUSTED |
| 1C | NEW FRAME AND LID, TYPE 1, CLOSED LID |
| 1P | NEW FRAME AND LID, TYPE 1, OPEN LID |
| 1B | NEW FRAME AND LID, TYPE 1, WATERTIGHT BOLT DOWN LID |
| RC | STRUCTURE TO BE RECONSTRUCTED |
| [Hydrant] | EXISTING FIRE HYDRANT |
| [Valve] | EXISTING WATER VALVE BOX |
| [Vault] | EXISTING WATER MAIN VALVE VAULT |
| [Inlet] | EXISTING STORM SEWER INLET |
| [Basin] | EXISTING STORM SEWER CATCH BASIN |
| [Basin] | PROPOSED STORM SEWER CATCH BASIN |
| [Manhole] | EXISTING SEWER MANHOLE |
| [Light] | EXISTING STREET LIGHT POLE |
| [Power] | EXISTING POWER POLE |
| [Handhole] | EXISTING HANDHOLE |
| [Curb] | EXISTING CURB AND GUTTER |
| [Curb] | PROPOSED CONCRETE CURB, TYPE B |
| [Curb] | PROPOSED COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT |
| [Sewer] | EXISTING STORM SEWER |
| [Sewer] | EXISTING COMBINED SEWER |
| [Water] | EXISTING WATER MAIN |
| TP | TREE TRUNK PROTECTION |
| RP | TREE ROOT PRUNING |

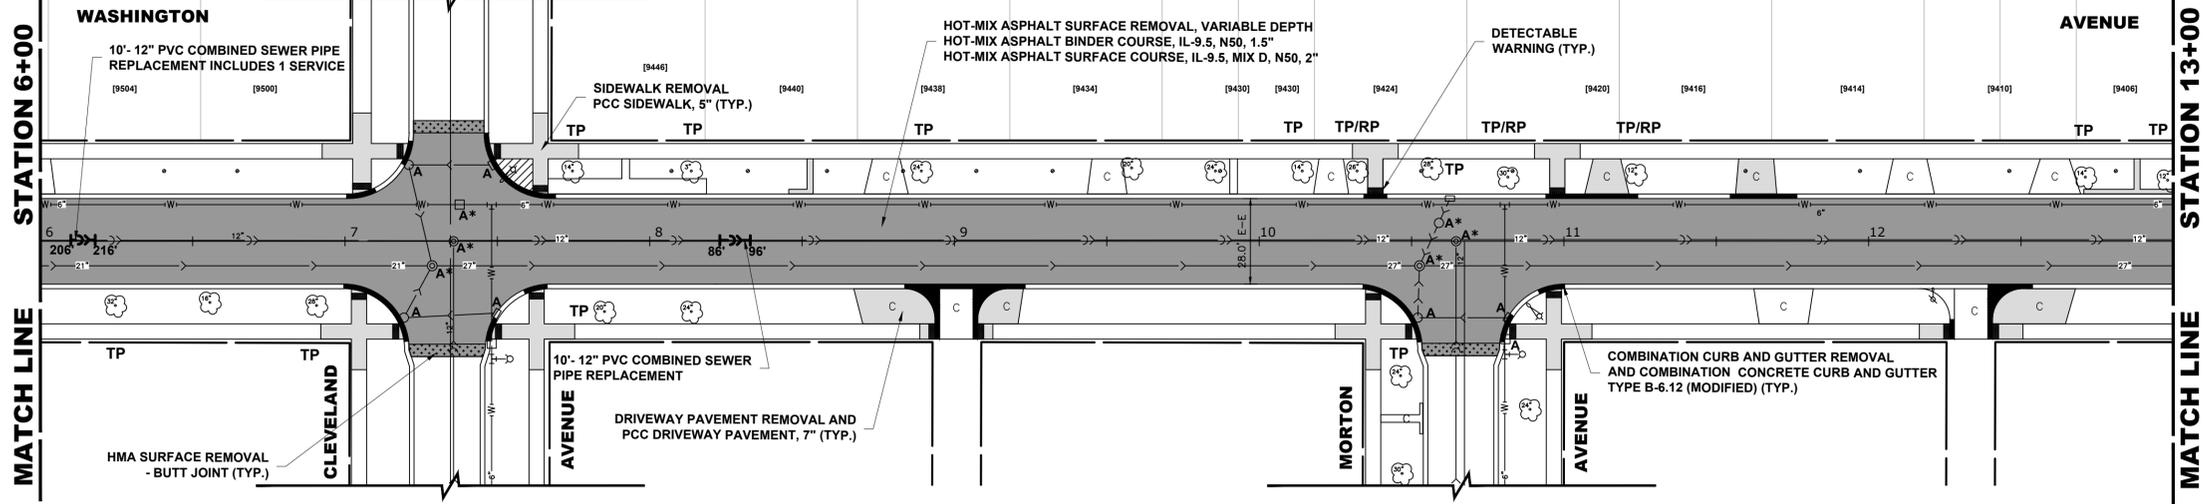

PROPOSED IMPROVEMENTS



♦ Civil Engineers
 ♦ Municipal Consultants
 ♦ Established 1911
 9933 Roosevelt Road
 Westchester, IL 60154-2780
 Phone: 708-845-0300
 www.hancock.com

DESIGNED	—	REVISED	—
DRAWN	— ECW, SFB, DMM	REVISED	—
CHECKED	—	REVISED	— 5-2-22 I.D.O.T.
DATE	— 11-17-21	REVISED	— 2-15-22 I.D.O.T.


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

RESURFACING PLAN

SCALE: 1" = 30' SHEET NO. 1 OF 4 SHEETS STA. 0+00 TO STA. 13+00

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	10
FED. ROAD DIST. NO. 1 ILLINOIS			CONTRACT NO. 61H70	
FED. AID PROJECT Z3Q2(622)			E.H.E. PROJECT NO. 125210061	


Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave. LRF0\Site\Washington Ave.dwg May 02, 2022 - 3:09pm

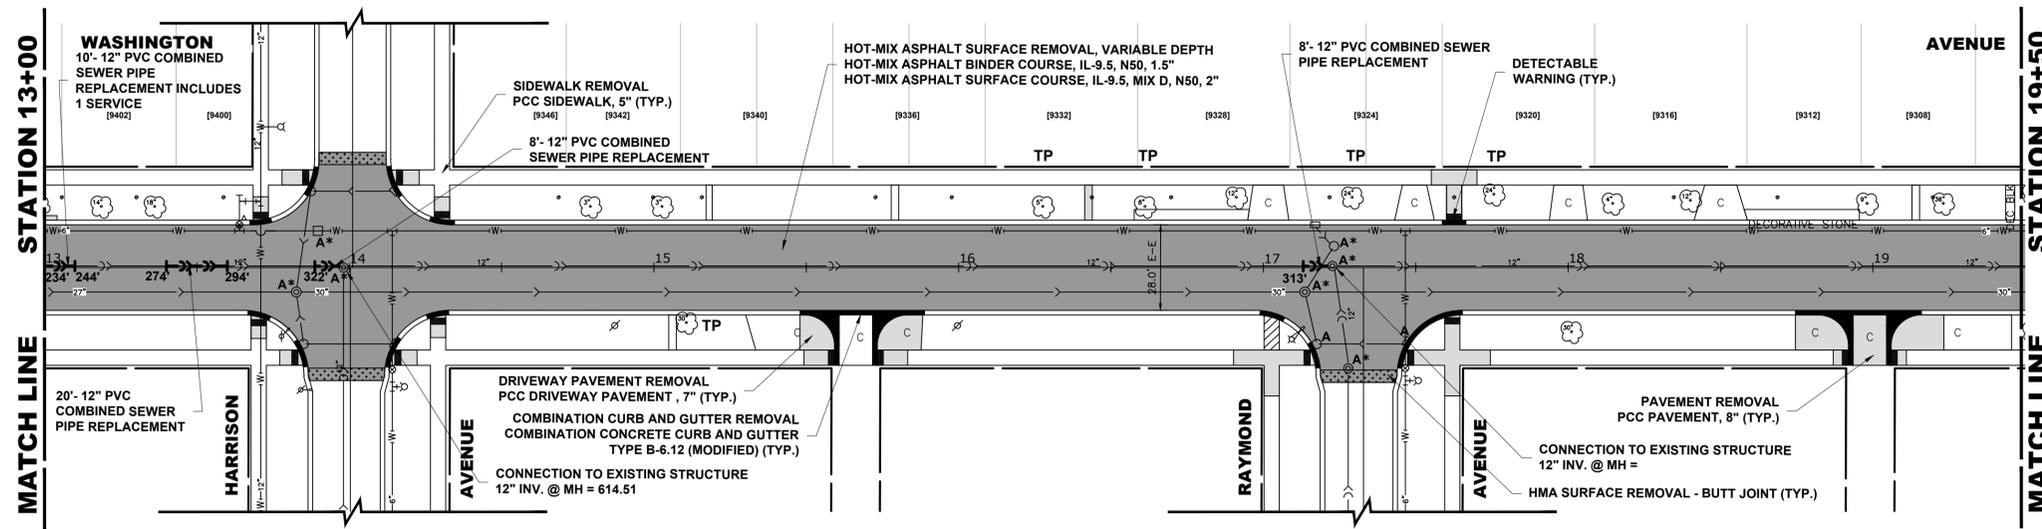

PROPOSED IMPROVEMENTS

LEGEND OF SYMBOLS
(TO BE USED IN CONJUNCTION WITH I.D.O.T. STANDARD 000001-07)

SYMBOL	DESCRIPTION
A	EXISTING HOT-MIX ASPHALT AREA
C	EXISTING CONCRETE AREA
G	EXISTING GRASS AREA
[Pattern]	PROPOSED HOT-MIX ASPHALT BUTT JOINT
[Pattern]	REMOVE AND REINSTALL BRICK PAVER
[Pattern]	PROPOSED CONCRETE AREA, 5" SIDEWALK, 7" DRIVEWAY
[Pattern]	PROPOSED HOT-MIX ASPHALT RESURFACING AREA
A	STRUCTURE TO BE ADJUSTED
A*	STRUCTURE TO BE ADJUSTED (SPECIAL)
AH	HANDHOLE TO BE ADJUSTED
1C	NEW FRAME AND LID, TYPE 1, CLOSED LID
1P	NEW FRAME AND LID, TYPE 1, OPEN LID
1B	NEW FRAME AND LID, TYPE 1, WATERTIGHT BOLT DOWN LID
RC	STRUCTURE TO BE RECONSTRUCTED
[Symbol]	EXISTING FIRE HYDRANT
[Symbol]	EXISTING WATER VALVE BOX
[Symbol]	EXISTING WATER MAIN VALVE VAULT
[Symbol]	EXISTING STORM SEWER INLET
[Symbol]	EXISTING STORM SEWER CATCH BASIN
[Symbol]	PROPOSED STORM SEWER CATCH BASIN
[Symbol]	EXISTING SEWER MANHOLE
[Symbol]	EXISTING STREET LIGHT POLE
[Symbol]	EXISTING POWER POLE
[Symbol]	EXISTING HANDHOLE
[Symbol]	EXISTING CURB AND GUTTER
[Symbol]	PROPOSED CONCRETE CURB, TYPE B
[Symbol]	PROPOSED COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT
[Symbol]	EXISTING STORM SEWER
[Symbol]	EXISTING COMBINED SEWER
[Symbol]	EXISTING WATER MAIN
TP	TREE TRUNK PROTECTION
RP	TREE ROOT PRUNING

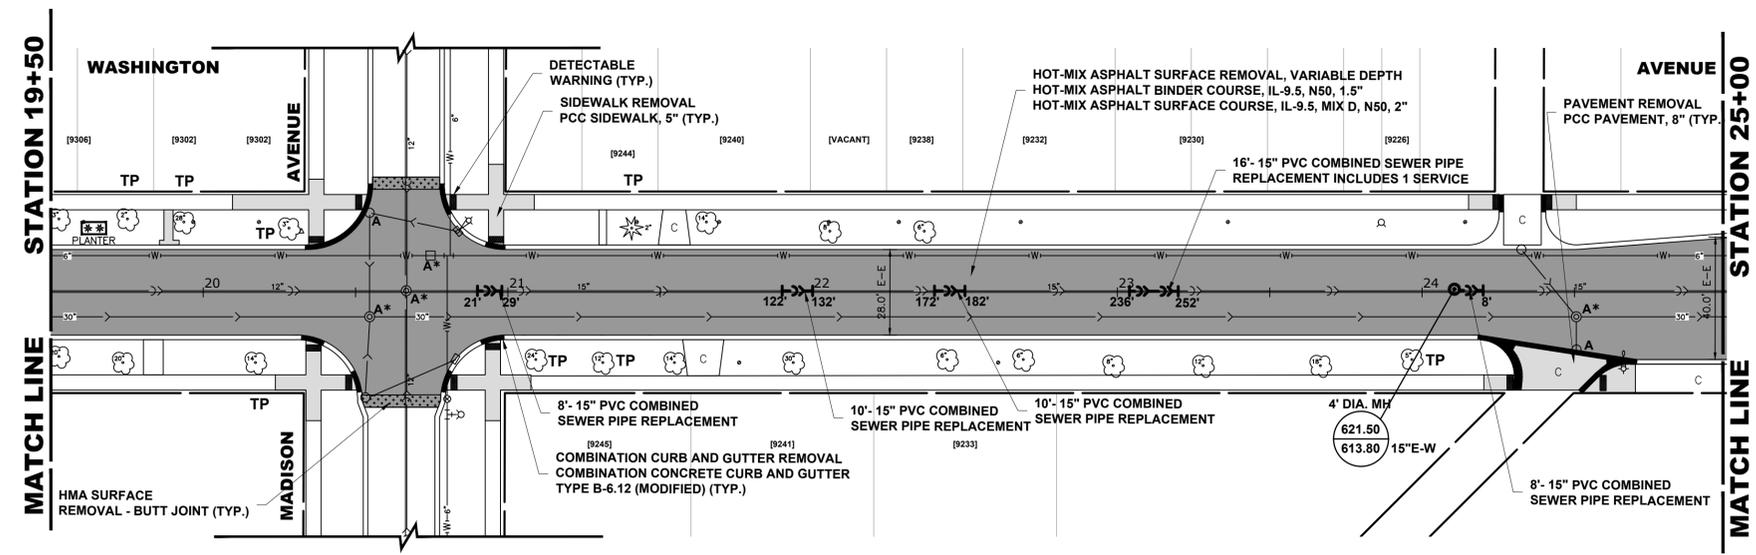

PROPOSED IMPROVEMENTS



Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave. LRF0\Site\Washington Ave.dwg May 02, 2022 - 3:09pm

HANCOCK ENGINEERING
100+ Years of Excellence

- ◆ Civil Engineers
- ◆ Municipal Consultants
- ◆ Established 1911

9933 Roosevelt Road
Westchester, IL 60154-2780
Phone: 708-845-0300
www.hancock.com



DESIGNED	-	REVISED	-
DRAWN	ECW, SFB, DMM	REVISED	-
CHECKED	-	REVISED	5-2-22 I.D.O.T.
DATE	11-17-21	REVISED	2-15-22 I.D.O.T.

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

RESURFACING PLAN

SCALE: 1" = 30'
SHEET NO. 2 OF 4 SHEETS
STA. 12+00 TO STA. 25+00

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	11
FED. ROAD DIST. NO. 1 ILLINOIS			CONTRACT NO. 61H70	
E.H.E. PROJECT NO. 125210061			FED. AID PROJECT Z3Q2(622)	

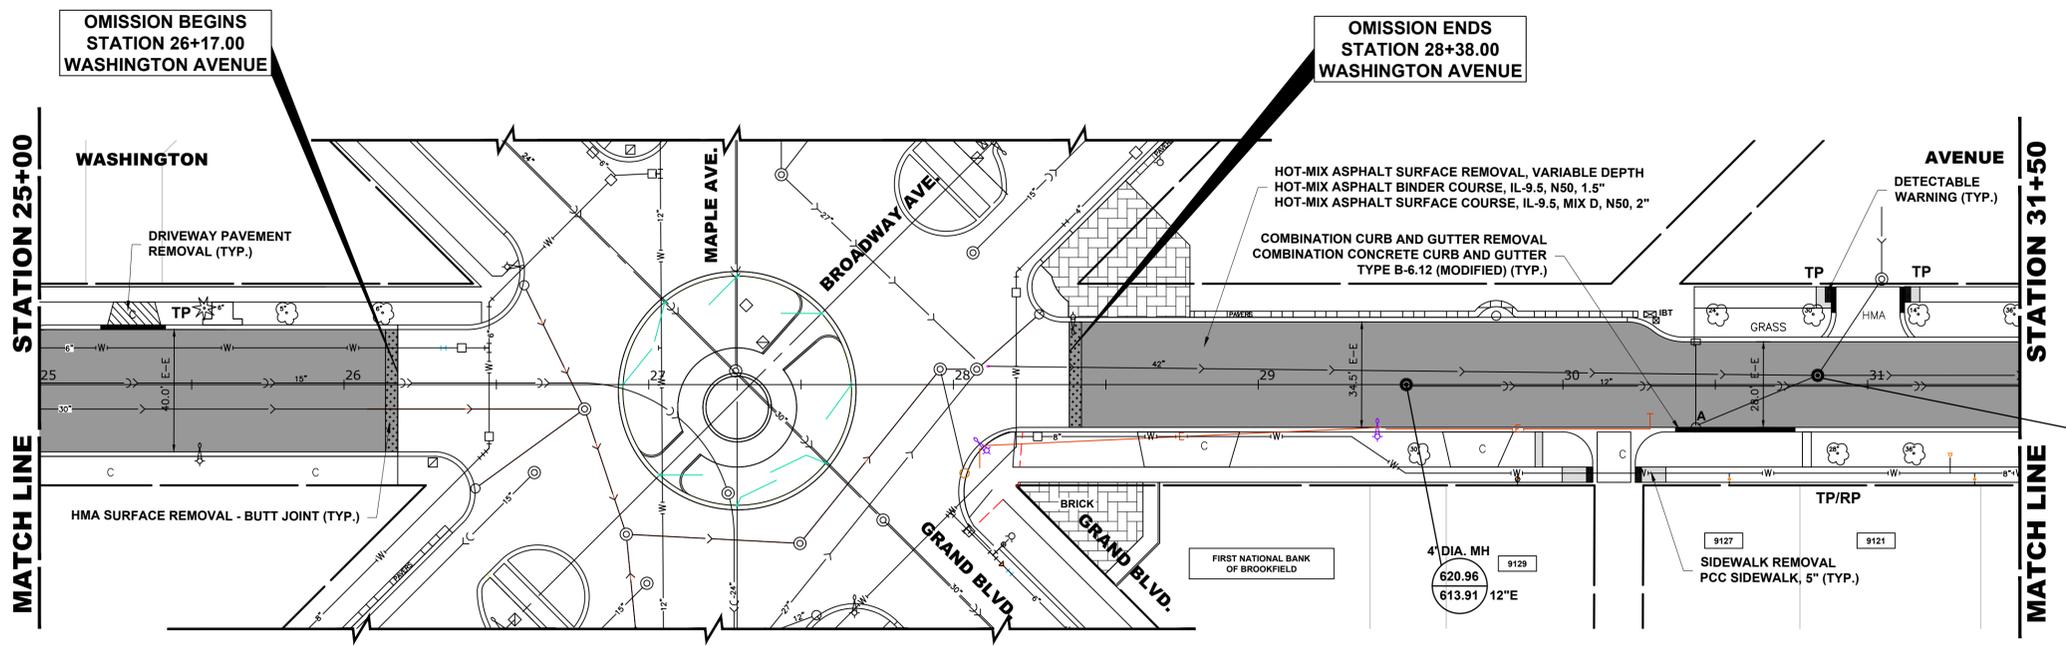


4' DIA. MH	620.90	
	615.00	10°SW
	613.00	12°NE
	608.58	24°E-W

LEGEND OF SYMBOLS

(TO BE USED IN CONJUNCTION WITH I.D.O.T. STANDARD 000001-07)

SYMBOL	DESCRIPTION
A	EXISTING HOT-MIX ASPHALT AREA
C	EXISTING CONCRETE AREA
G	EXISTING GRASS AREA
[Pattern]	PROPOSED HOT-MIX ASPHALT BUTT JOINT
[Pattern]	REMOVE AND REINSTALL BRICK PAVER
[Pattern]	PROPOSED CONCRETE AREA, 5" SIDEWALK, 7" DRIVEWAY
[Pattern]	PROPOSED HOT-MIX ASPHALT RESURFACING AREA
A	STRUCTURE TO BE ADJUSTED
A*	STRUCTURE TO BE ADJUSTED (SPECIAL)
AH	HANDHOLE TO BE ADJUSTED
1C	NEW FRAME AND LID, TYPE 1, CLOSED LID
1P	NEW FRAME AND LID, TYPE 1, OPEN LID
1B	NEW FRAME AND LID, TYPE 1, WATERTIGHT BOLT DOWN LID
RC	STRUCTURE TO BE RECONSTRUCTED
[Symbol]	EXISTING FIRE HYDRANT
[Symbol]	EXISTING WATER VALVE BOX
[Symbol]	EXISTING WATER MAIN VALVE VAULT
[Symbol]	EXISTING STORM SEWER INLET
[Symbol]	EXISTING STORM SEWER CATCH BASIN
[Symbol]	PROPOSED STORM SEWER CATCH BASIN
[Symbol]	EXISTING SEWER MANHOLE
[Symbol]	EXISTING STREET LIGHT POLE
[Symbol]	EXISTING POWER POLE
[Symbol]	EXISTING HANDHOLE
[Symbol]	EXISTING CURB AND GUTTER
[Symbol]	PROPOSED CONCRETE CURB, TYPE B
[Symbol]	PROPOSED COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT
[Symbol]	EXISTING STORM SEWER
[Symbol]	EXISTING COMBINED SEWER
[Symbol]	EXISTING WATER MAIN
TP	TREE TRUNK PROTECTION
RP	TREE ROOT PRUNING

PROPOSED IMPROVEMENTS

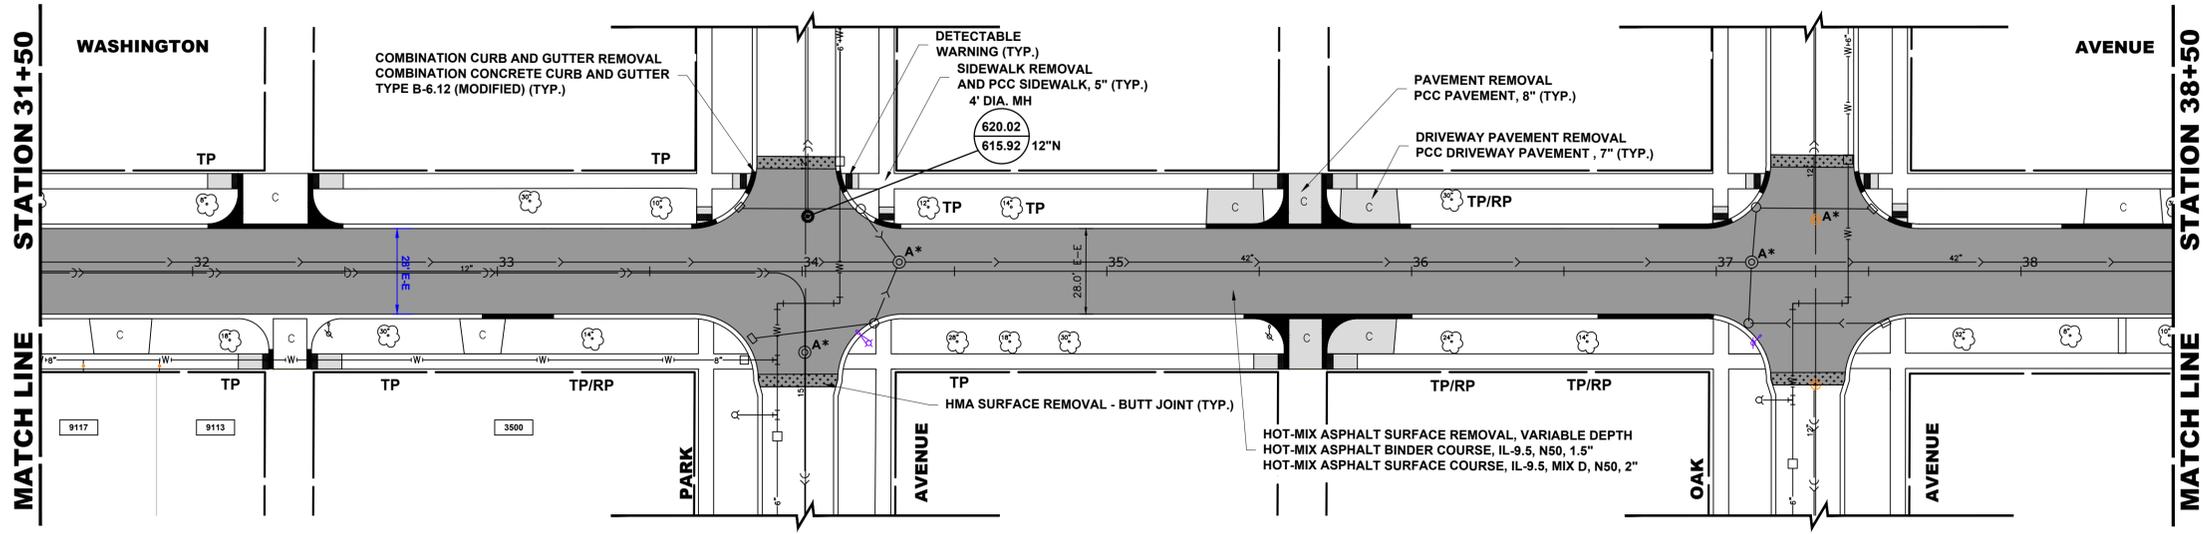

PROPOSED IMPROVEMENTS

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave I.D.O.T. Site\Washington Ave.dwg May 02, 2022 - 3:09pm

HANCOCK ENGINEERING

100+ Years of Excellence

- ◆ Civil Engineers
- ◆ Municipal Consultants
- ◆ Established 1911

9933 Roosevelt Road
Westchester, IL 60154-2780
Phone: 708-845-0300
www.hancock.com



DESIGNED	- -	REVISED	- -
DRAWN	ECW, SFB, DMM	REVISED	- -
CHECKED	- -	REVISED	5-2-22 I.D.O.T.
DATE	11-17-21	REVISED	2-15-22 I.D.O.T.

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

RESURFACING PLAN

SCALE: 1" = 30' SHEET NO. 3 OF 4 SHEETS STA. 25+00 TO STA. 38+50


F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	12
FED. ROAD DIST. NO. 1		ILLINOIS	CONTRACT NO. 61H70	
		FED. AID PROJECT	Z3Q2(622)	
E.H.E. PROJECT NO. 1252100601				

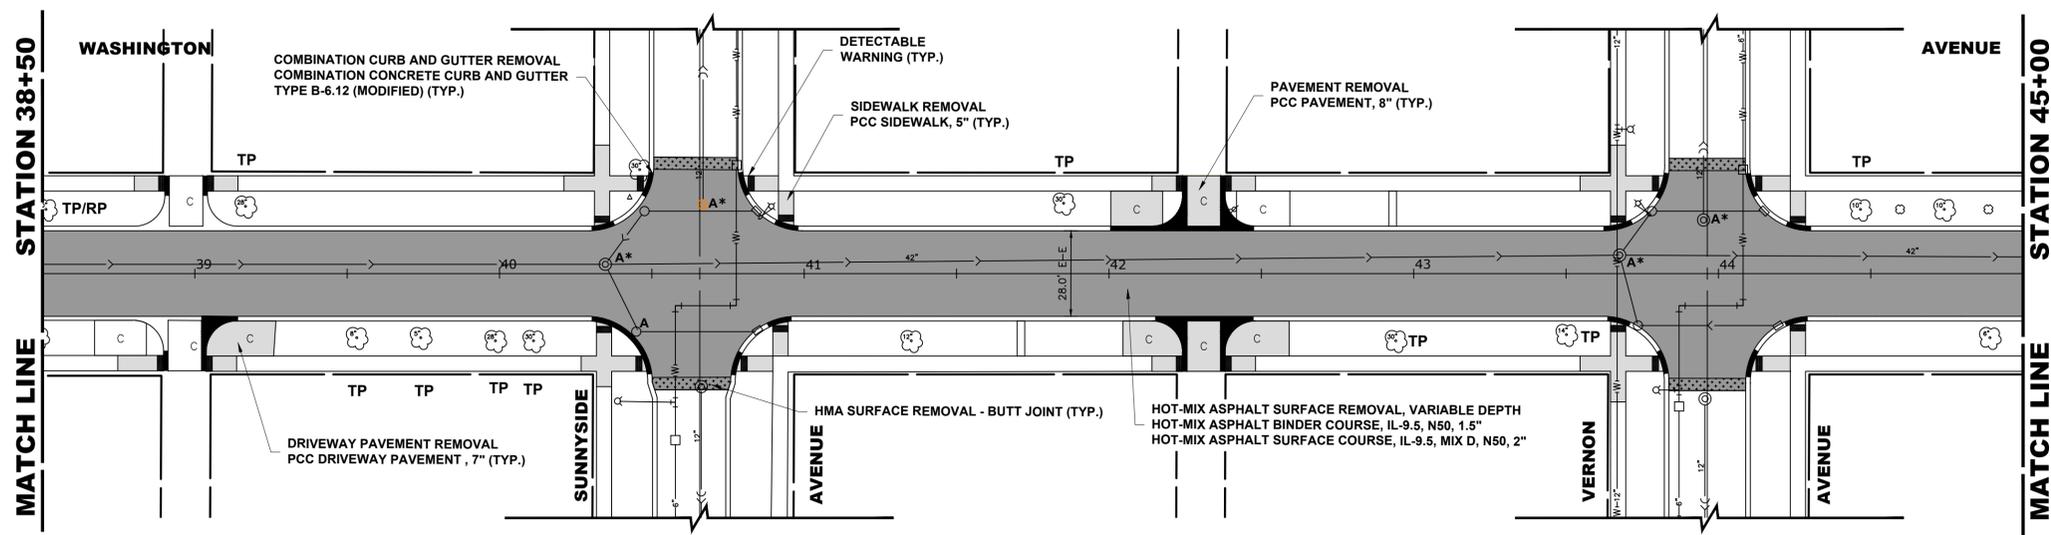

PROPOSED IMPROVEMENTS

LEGEND OF SYMBOLS
(TO BE USED IN CONJUNCTION WITH I.D.O.T. STANDARD 000001-07)

SYMBOL	DESCRIPTION
A	EXISTING HOT-MIX ASPHALT AREA
C	EXISTING CONCRETE AREA
G	EXISTING GRASS AREA
[Pattern]	PROPOSED HOT-MIX ASPHALT BUTT JOINT
[Pattern]	REMOVE AND REINSTALL BRICK PAVER
[Pattern]	PROPOSED CONCRETE AREA, 5" SIDEWALK, 7" DRIVEWAY
[Pattern]	PROPOSED HOT-MIX ASPHALT RESURFACING AREA
A	STRUCTURE TO BE ADJUSTED
A*	STRUCTURE TO BE ADJUSTED (SPECIAL)
AH	HANDHOLE TO BE ADJUSTED
1C	NEW FRAME AND LID, TYPE 1, CLOSED LID
1P	NEW FRAME AND LID, TYPE 1, OPEN LID
1B	NEW FRAME AND LID, TYPE 1, WATERTIGHT BOLT DOWN LID
RC	STRUCTURE TO BE RECONSTRUCTED
[Symbol]	EXISTING FIRE HYDRANT
[Symbol]	EXISTING WATER VALVE BOX
[Symbol]	EXISTING WATER MAIN VALVE VAULT
[Symbol]	EXISTING STORM SEWER INLET
[Symbol]	EXISTING STORM SEWER CATCH BASIN
[Symbol]	PROPOSED STORM SEWER CATCH BASIN
[Symbol]	EXISTING SEWER MANHOLE
[Symbol]	EXISTING STREET LIGHT POLE
[Symbol]	EXISTING POWER POLE
[Symbol]	EXISTING HANDHOLE
[Symbol]	EXISTING CURB AND GUTTER
[Symbol]	PROPOSED CONCRETE CURB, TYPE B
[Symbol]	PROPOSED COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT
[Symbol]	EXISTING STORM SEWER
[Symbol]	EXISTING COMBINED SEWER
[Symbol]	EXISTING WATER MAIN
TP	TREE TRUNK PROTECTION
RP	TREE ROOT PRUNING

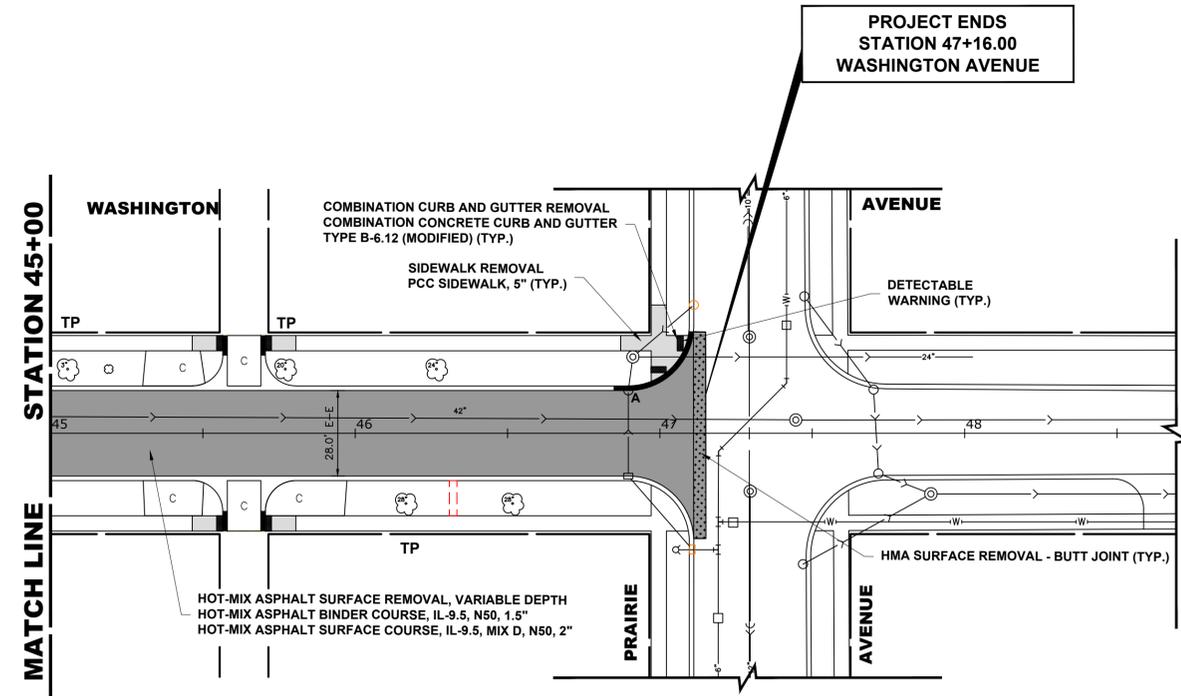

PROPOSED IMPROVEMENTS

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave LRF0\Site\Washington Ave.dwg May 02, 2022 - 3:09pm

HANCOCK ENGINEERING
100+ Years of Excellence

- Civil Engineers
- Municipal Consultants
- Established 1911

9933 Roosevelt Road
Westchester, IL 60154-2780
Phone: 708-845-0300
www.hancock.com

DESIGNED	-	REVISED	-
DRAWN	ECW, SFB, DMM	REVISED	-
CHECKED	-	REVISED	5-2-22 I.D.O.T.
DATE	11-17-21	REVISED	2-15-22 I.D.O.T.


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

RESURFACING PLAN

SCALE: 1" = 30' SHEET NO. 4 OF 4 SHEETS STA. 38+50 TO STA. 48+00

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	13
FED. ROAD DIST. NO. 1 ILLINOIS		CONTRACT NO. 61H70		
FED. AID PROJECT Z3Q2(622)		E.H.E. PROJECT NO. 1252100601		

PROJECT BEGINS
STATION 1+00.00
WASHINGTON AVENUE

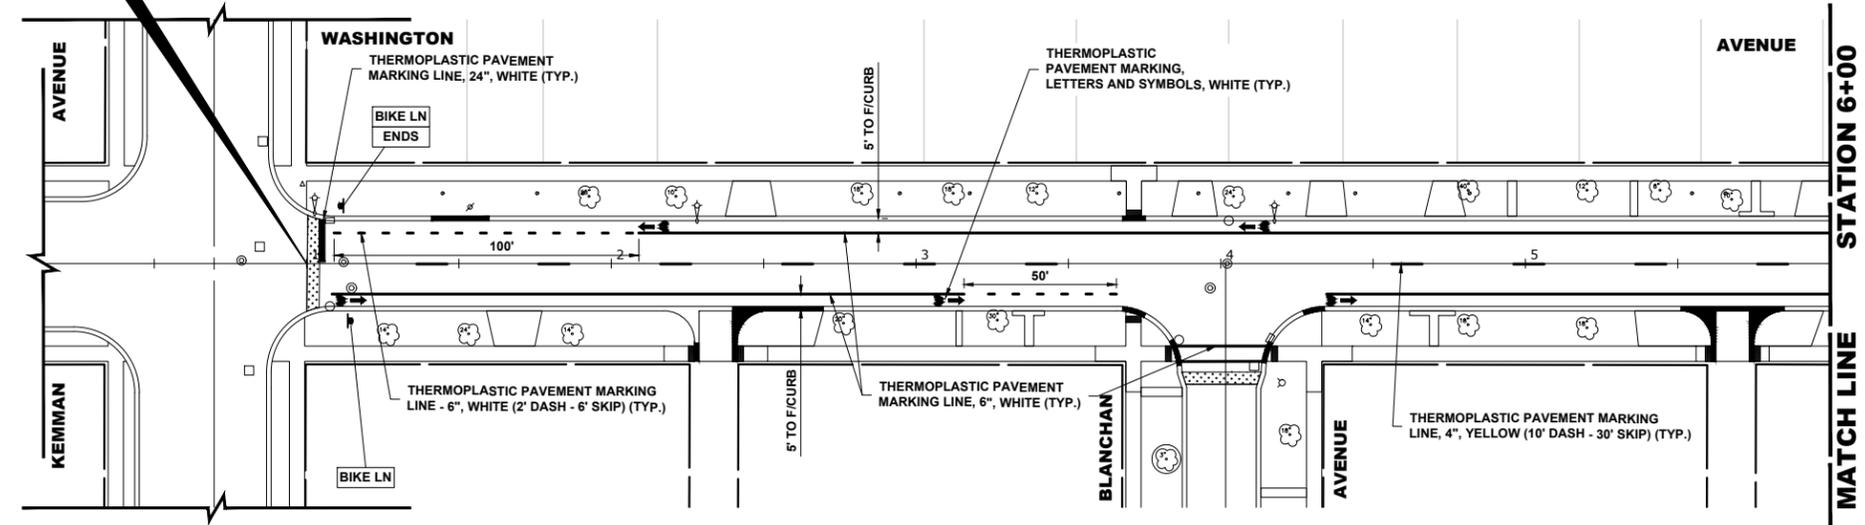


PROPOSED IMPROVEMENTS

JOB-SITE SIGNING CODES AND SIZES		
SYMBOL	SIGN	CODE & SIZE
BIKE LN		R3-17 24" x 18"
ENDS		R3-17bP 24" x 8"

SIGNING NOTES:

- DESIGN: AASHTO STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS, 1975.
- CONSTRUCTION: CURRENTS STANDARD SPECIFICATIONS FOR TRAFFIC CONTROL ITEMS, AND APPLICABLE SPECIAL PROVISIONS.
- LOADING: FOR 80 MPH WIND VELOCITY WITH 30% GUST FACTOR, NORMAL TO SIGN.
- SOIL PRESSURE: MINIMUM ALLOWABLE SOIL PRESSURE = 1.25 TSF.
- MATERIALS: POSTS SHALL CONFORM TO THE REQUIREMENTS OF ARTICLE 1006.29, STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, STATE OF ILLINOIS.
- HARDWARE FOR ATTACHING SIGN PANELS TO POSTS SHALL BE CADIUM OR ZINC COATED STEEL, STAINLESS STEEL, OR ALUMINUM, AND SHALL CONFORM TO THE FOLLOWING SPECIFICATIONS: CADIUM OR ZINC COATED STEEL: BOLTS, NUTS, AND WASHERS: ASTM A165, TYPE NS. ZINC COATED IN ACCORDANCE WITH AASHTO M-232 OR ASTM A164, TYPE GS.
- STAINLESS STEEL: BOLTS: ASTM A193, CLASS I, GRADE B8, NUTS: ASTM A194, GRADE 8 OR 8F, WASHERS: ASTM A240, TYPE 302 OR 304.
- ALUMINUM: BOLTS: ASTM B211 ALLOY 6061-T6 OR 2024-T4, NUTS: ASTM B211 ALLOY 6061-T6 OR 6262-T9, WASHERS: ASTM B209 ALCLAD 2024-T4.
- NOTE:** PER 2009 MUTCD SECTION 2D.43, PARAGRAPH 03, STREET NAME SIGNS ARE TO BE MIXED CASE FONT.

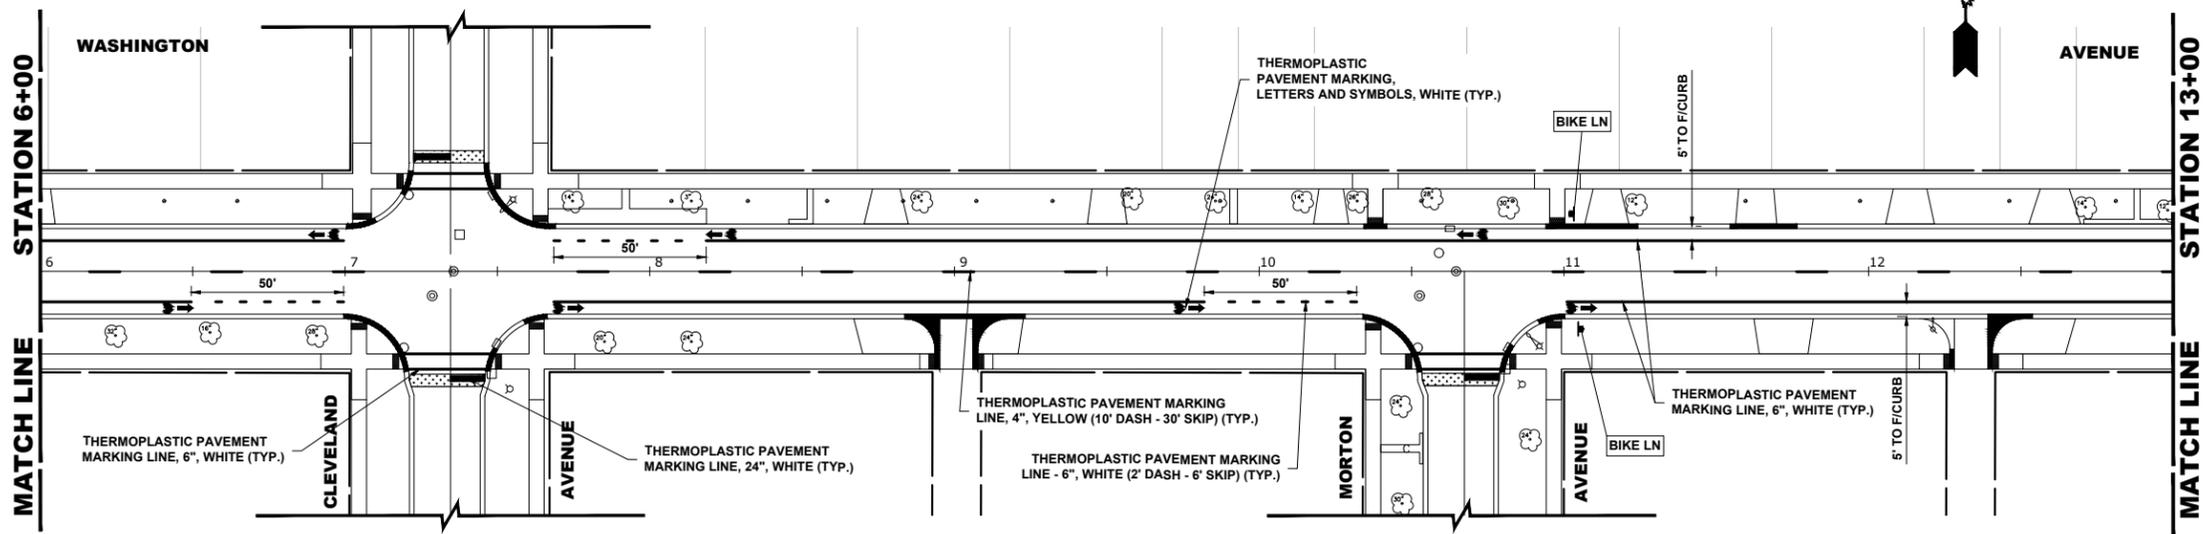

PROPOSED IMPROVEMENTS

SYMBOL	DESCRIPTION
	METAL POST - TYPE A

Drawing file: W:\Projects_by_Village\Brockfield\12521006 - Washington Ave. UPO\Site\Washington Ave.dwg Mar 07, 2022 - 11:57am

HANCOCK ENGINEERING
 100% Years of Experience
 ♦ CMI Engineers
 ♦ Municipal Consultants
 ♦ Established 1911

7700 Roosevelt Road
 Washington, IL 60154-5202
 Phone: 708/645-0202
 www.hancockeng.com


DESIGNED	—	REVISED	—
DRAWN	ECW, SFB, DMM	REVISED	—
CHECKED	—	REVISED	—
DATE	11-17-21	REVISED	2-15-22 I.D.O.T.

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

PAVEMENT MARKING AND SIGNING PLAN

SCALE: 1" = 30'
 SHEET NO. 1 OF 4 SHEETS
 STA. 0+00 TO STA. 13+00

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	14
FED. ROAD DIST. NO. 1		ILLINOIS	CONTRACT NO. 61H70	
			FED. AID PROJECT Z3Q2(622)	
E.H.E. PROJECT NO. 1252100601				

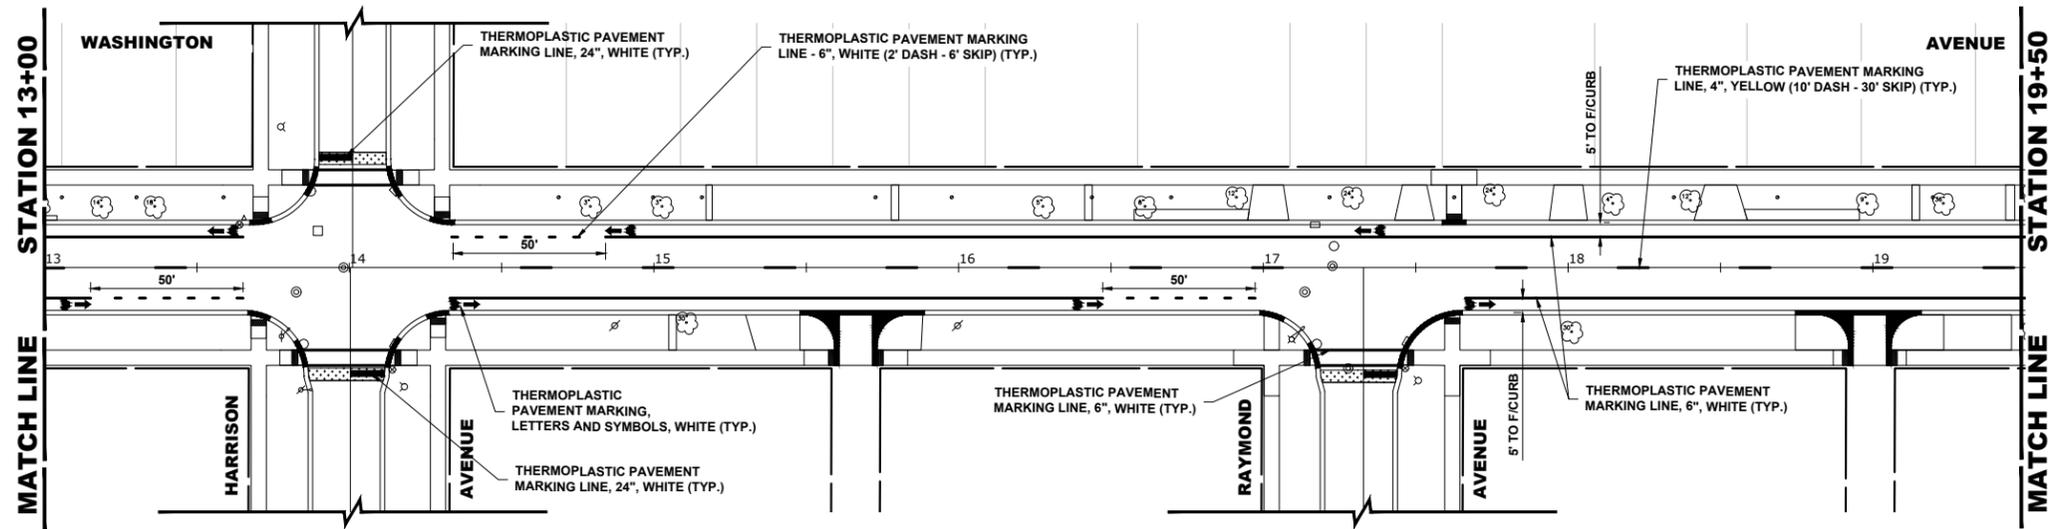


PROPOSED IMPROVEMENTS

JOB-SITE SIGNING CODES AND SIZES		
SYMBOL	SIGN	CODE & SIZE
		R3-17 24"x 18"
		R3-17bP 24"x 8"

SIGNING NOTES:

- DESIGN: AASHTO STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS, 1975.
- CONSTRUCTION: CURRENTS STANDARD SPECIFICATIONS FOR TRAFFIC CONTROL ITEMS, AND APPLICABLE SPECIAL PROVISIONS.
- LOADING: FOR 80 MPH WIND VELOCITY WITH 30% GUST FACTOR, NORMAL TO SIGN.
- SOIL PRESSURE: MINIMUM ALLOWABLE SOIL PRESSURE = 1.25 TSF.
- MATERIALS:
 - POSTS SHALL CONFORM TO THE REQUIREMENTS OF ARTICLE 1006.29, STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, STATE OF ILLINOIS.
 - HARDWARE FOR ATTACHING SIGN PANELS TO POSTS SHALL BE CADMIUM OR ZINC COATED STEEL, STAINLESS STEEL, OR ALUMINUM, AND SHALL CONFORM TO THE FOLLOWING SPECIFICATIONS: CADMIUM OR ZINC COATED STEEL: BOLTS, NUTS, AND WASHERS: ASTM A165, TYPE NS. ZINC COATED IN ACCORDANCE WITH AASHTO M-232 OR ASTM A164, TYPE GS.
 - STAINLESS STEEL: BOLTS: ASTM A193, CLASS I, GRADE B8, NUTS: ASTM A194, GRADE 8 OR 8F, WASHERS: ASTM A240, TYPE 302 OR 304.
 - ALUMINUM: BOLTS: ASTM B211 ALLOY 6061-T6 OR 2024-T4, NUTS: ASTM B211 ALLOY 6061-T6 OR 6262-T9, WASHERS: ASTM B209 ALCLAD 2024-T4.
- NOTE:** PER 2009 MUTCD SECTION 2D.43, PARAGRAPH 03, STREET NAME SIGNS ARE TO BE MIXED CASE FONT.

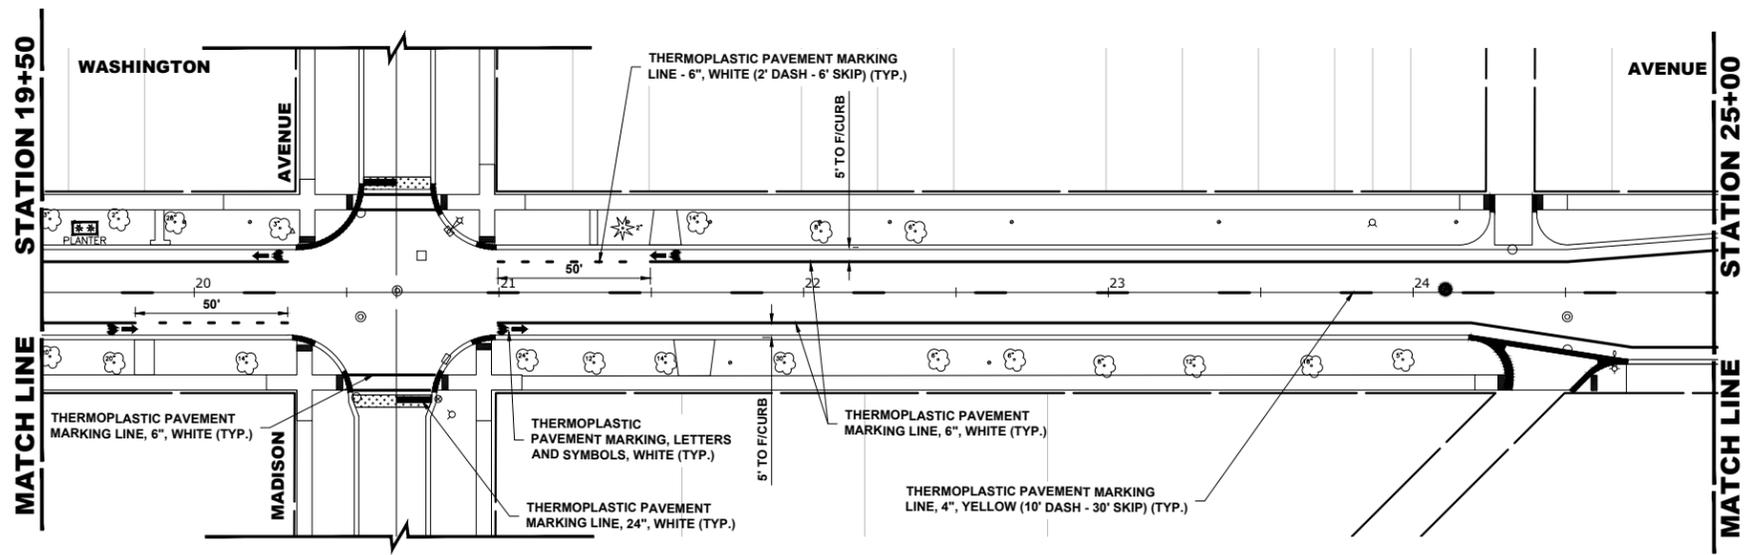

PROPOSED IMPROVEMENTS

SYMBOL	DESCRIPTION
	METAL POST - TYPE A

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave. UPO\Site\Washington Ave.dwg Mar 07, 2022 - 11:58am

HANCOCK ENGINEERING
 100+ Years of Experience
 ♦ CMI Engineers
 ♦ Municipal Consultants
 ♦ Established 1911

7700 Roosevelt Road
 Wheeling, IL 60090-2902
 Phone: 708/945-0202
 www.hancockeng.com


DESIGNED	-	REVISED	-
DRAWN	ECW, SFB, DMM	REVISED	-
CHECKED	-	REVISED	-
DATE	11-17-21	REVISED	2-15-22 I.D.O.T.

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

PAVEMENT MARKING AND SIGNING PLAN

SCALE: 1" = 30' SHEET NO. 2 OF 4 SHEETS STA. 12+00 TO STA. 25+00

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	15
FED. ROAD DIST. NO. 1 ILLINOIS			CONTRACT NO. 61H70	
E.H.E. PROJECT NO. 1252100601			FED. AID PROJECT Z3Q2(622)	

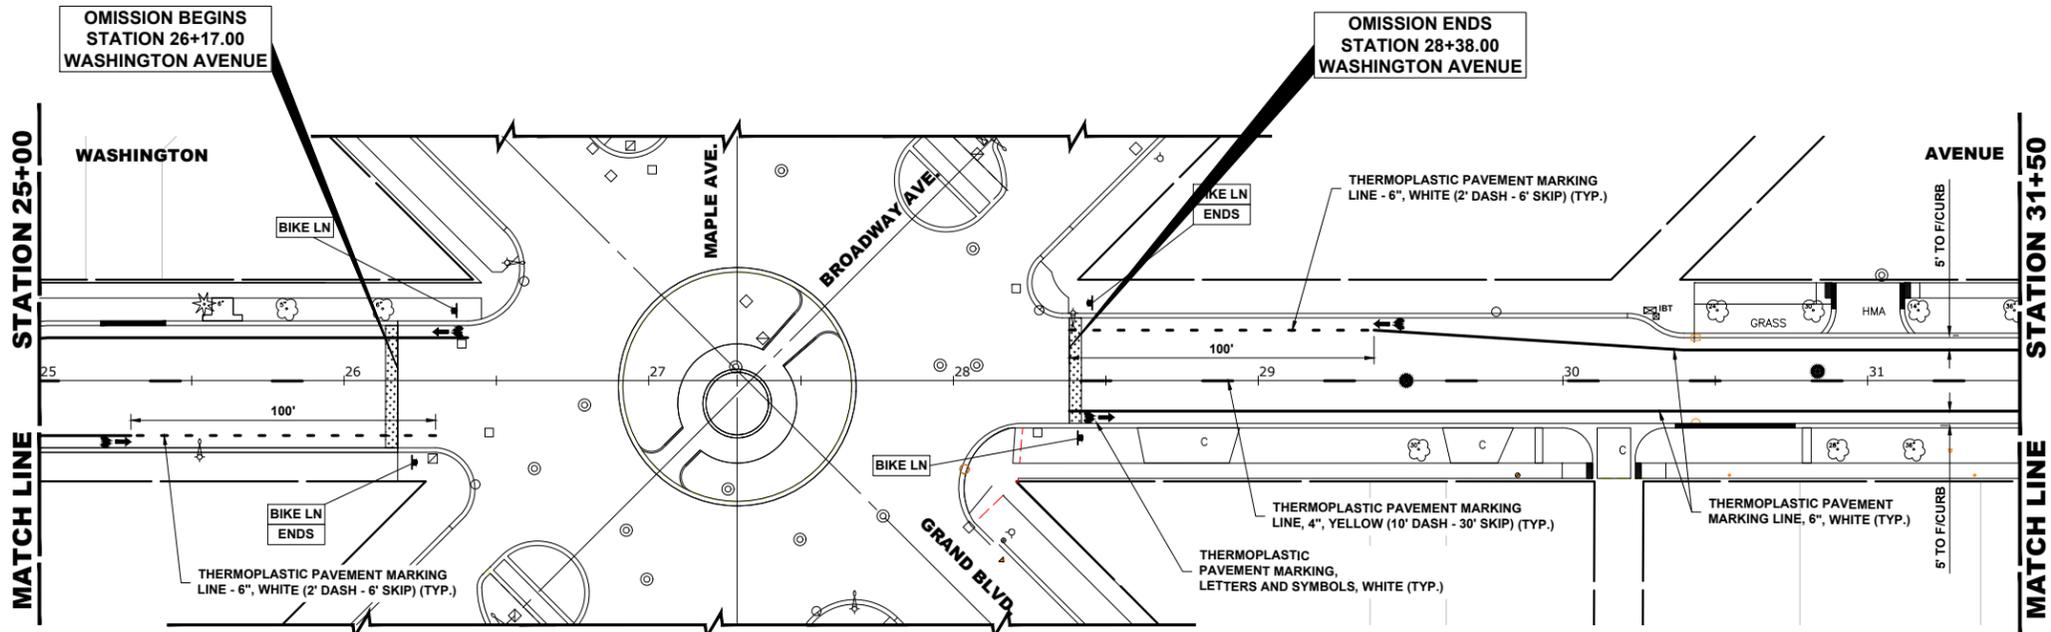

PROPOSED IMPROVEMENTS

JOB-SITE SIGNING CODES AND SIZES		
SYMBOL	SIGN	CODE & SIZE
		R3-17 24"x 18"
		R3-17bP 24"x 8"

SIGNING NOTES:


- DESIGN: AASHTO STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS, 1975.
- CONSTRUCTION: CURRENTS STANDARD SPECIFICATIONS FOR TRAFFIC CONTROL ITEMS, AND APPLICABLE SPECIAL PROVISIONS.
- LOADING: FOR 80 MPH WIND VELOCITY WITH 30% GUST FACTOR, NORMAL TO SIGN.
- SOIL PRESSURE: MINIMUM ALLOWABLE SOIL PRESSURE = 1.25 TSF.
- MATERIALS: POSTS SHALL CONFORM TO THE REQUIREMENTS OF ARTICLE 1006.29, STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, STATE OF ILLINOIS.

HARDWARE FOR ATTACHING SIGN PANELS TO POSTS SHALL BE CADIUM OR ZINC COATED STEEL, STAINLESS STEEL, OR ALUMINUM, AND SHALL CONFORM TO THE FOLLOWING SPECIFICATIONS: CADIUM OR ZINC COATED STEEL: BOLTS, NUTS, AND WASHERS: ASTM A165, TYPE NS. ZINC COATED IN ACCORDANCE WITH AASHTO M-232 OR ASTM A164, TYPE GS.

STAINLESS STEEL: BOLTS: ASTM A193, CLASS I, GRADE B8, NUTS: ASTM A194, GRADE 8 OR 8F, WASHERS: ASTM A240, TYPE 302 OR 304.

ALUMINUM: BOLTS: ASTM B211 ALLOY 6061-T6 OR 2024-T4, NUTS: ASTM B211 ALLOY 6061-T6 OR 6262-T9, WASHERS: ASTM B209 ALCLAD 2024-T4.

NOTE: PER 2009 MUTCD SECTION 2D.43, PARAGRAPH 03, STREET NAME SIGNS ARE TO BE MIXED CASE FONT.

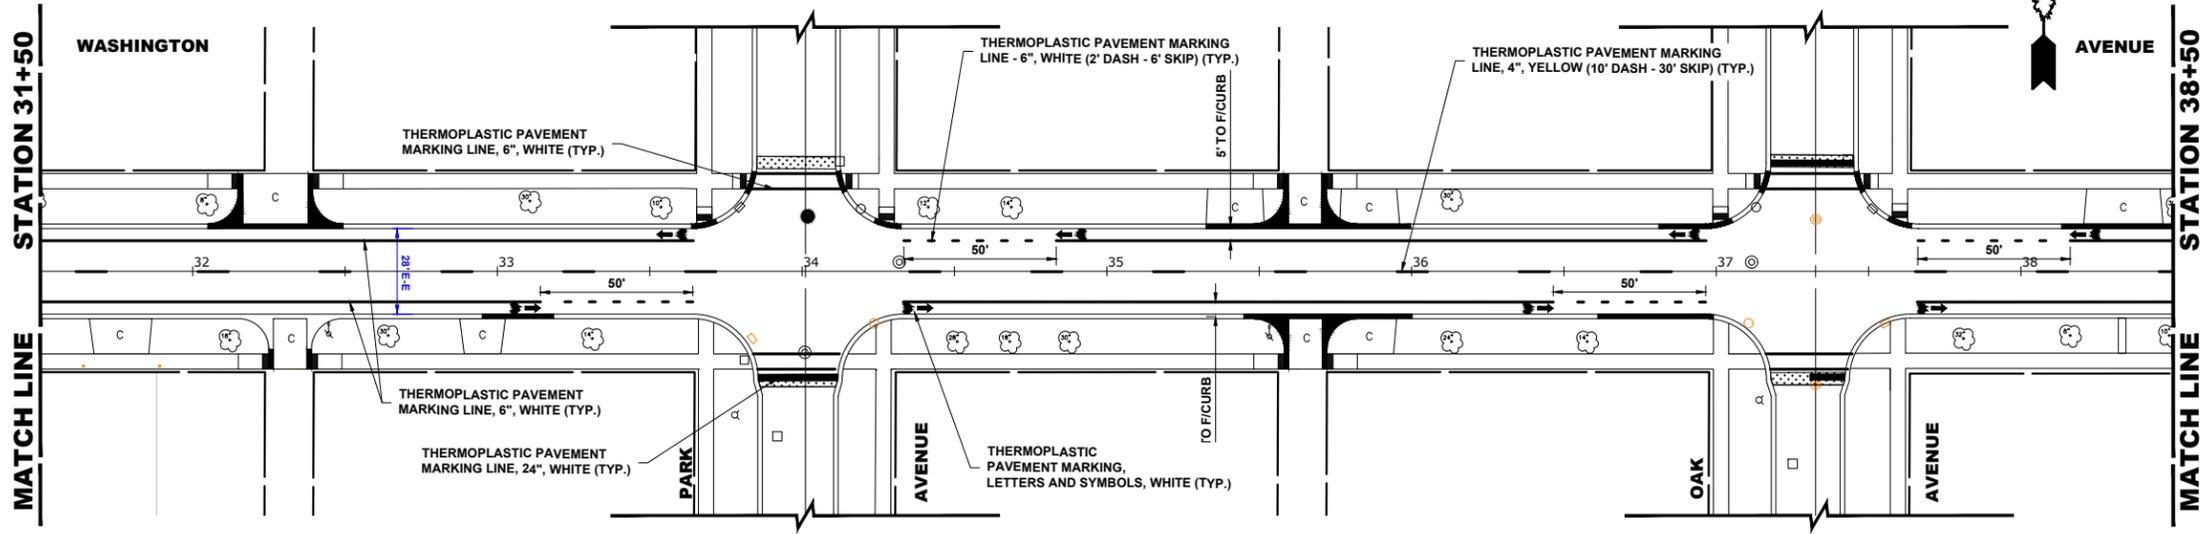

PROPOSED IMPROVEMENTS

SYMBOL	DESCRIPTION
	METAL POST - TYPE A

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave. UFD\Site\Washington Ave.dwg Mar 07, 2022 - 11:58am

HANCOCK ENGINEERING
 1000 Years of Experience
 ♦ CMI Engineers
 ♦ Municipal Consultants
 ♦ Established 1911


7700 Roosevelt Road
 Wheeling, IL 60090-2702
 Phone: 708/946-0800
 www.hancockeng.com

DESIGNED	—	REVISED	—
DRAWN	— ECW, SFB, DMM	REVISED	—
CHECKED	—	REVISED	—
DATE	— 11-17-21	REVISED	— 2-15-22 I.D.O.T.

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

PAVEMENT MARKING AND SIGNING PLAN
 SCALE: 1" = 30'
 SHEET NO. 3 OF 4 SHEETS
 STA. 25+00 TO STA. 38+50

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	16
FED. ROAD DIST. NO. 1		ILLINOIS	CONTRACT NO. 61H70	
			FED. AID PROJECT Z3Q2(622)	
E.H.E. PROJECT NO. 1252100601				

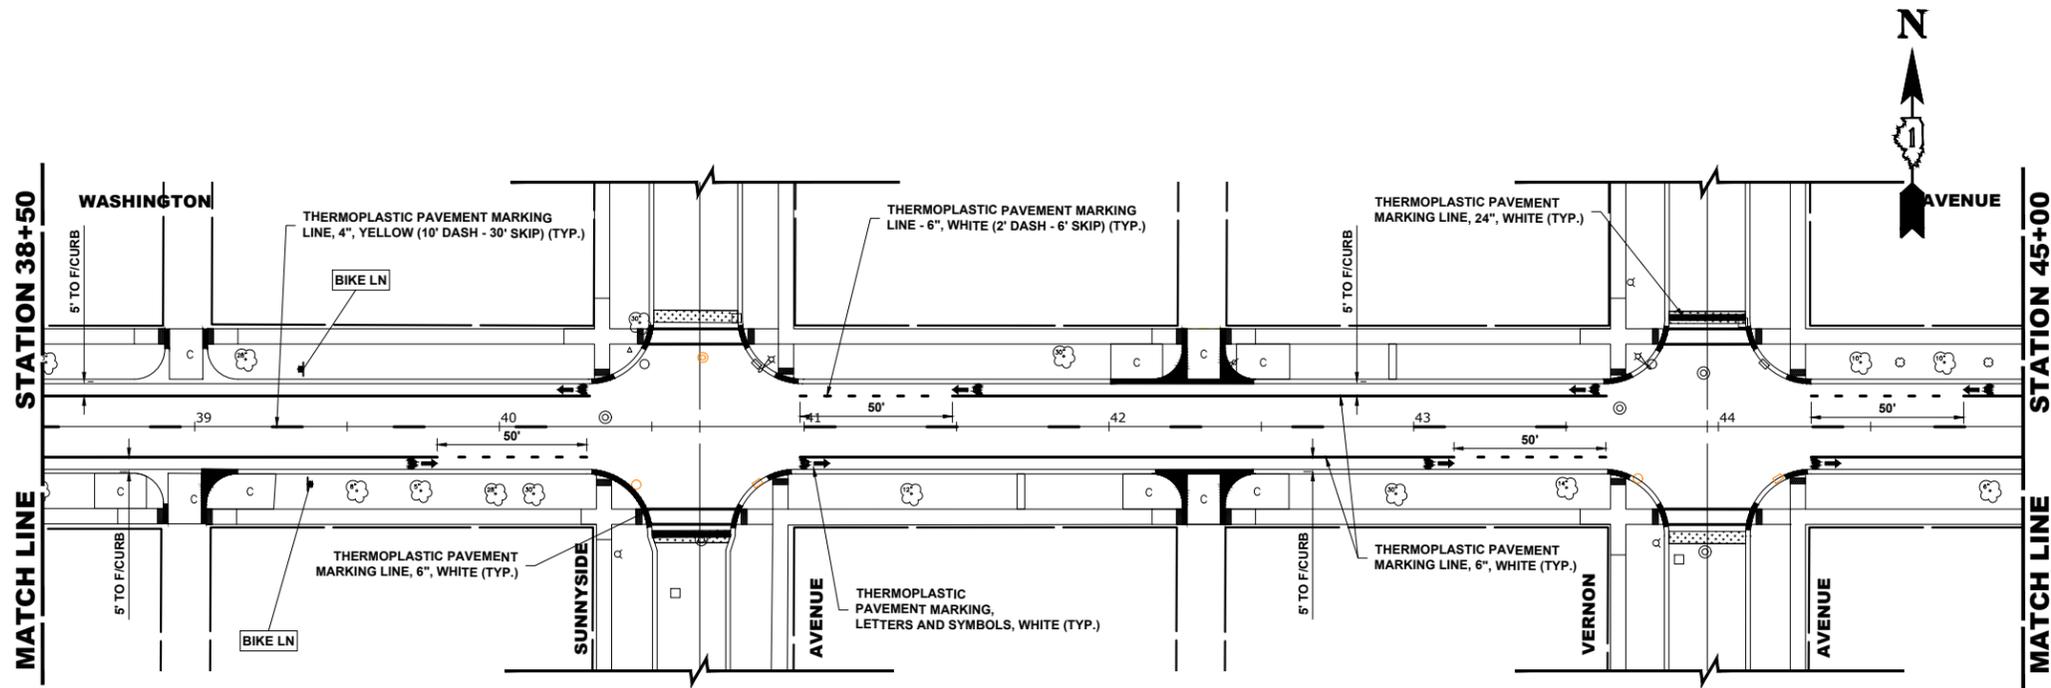


PROPOSED IMPROVEMENTS

JOB-SITE SIGNING CODES AND SIZES		
SYMBOL	SIGN	CODE & SIZE
		R3-17 24"x 18"
		R3-17bP 24"x 8"

SIGNING NOTES:

- DESIGN: AASHTO STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES, AND TRAFFIC SIGNALS, 1975.
- CONSTRUCTION: CURRENTS STANDARD SPECIFICATIONS FOR TRAFFIC CONTROL ITEMS, AND APPLICABLE SPECIAL PROVISIONS.
- LOADING: FOR 80 MPH WIND VELOCITY WITH 30% GUST FACTOR, NORMAL TO SIGN.
- SOIL PRESSURE: MINIMUM ALLOWABLE SOIL PRESSURE = 1.25 TSF.
- MATERIALS:
 - POSTS SHALL CONFORM TO THE REQUIREMENTS OF ARTICLE 1006.29, STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, STATE OF ILLINOIS.
 - HARDWARE FOR ATTACHING SIGN PANELS TO POSTS SHALL BE CADMIUM OR ZINC COATED STEEL, STAINLESS STEEL, OR ALUMINUM, AND SHALL CONFORM TO THE FOLLOWING SPECIFICATIONS: CADMIUM OR ZINC COATED STEEL: BOLTS, NUTS, AND WASHERS: ASTM A165, TYPE NS. ZINC COATED IN ACCORDANCE WITH AASHTO M-232 OR ASTM A164, TYPE GS.
 - STAINLESS STEEL: BOLTS: ASTM A193, CLASS I, GRADE B8, NUTS: ASTM A194, GRADE 8 OR 8F, WASHERS: ASTM A240, TYPE 302 OR 304.
 - ALUMINUM: BOLTS: ASTM B211 ALLOY 6061-T6 OR 2024-T4, NUTS: ASTM B211 ALLOY 6061-T6 OR 6262-T9, WASHERS: ASTM B209 ALCLAD 2024-T4.
- NOTE:** PER 2009 MUTCD SECTION 2D.43, PARAGRAPH 03, STREET NAME SIGNS ARE TO BE MIXED CASE FONT.

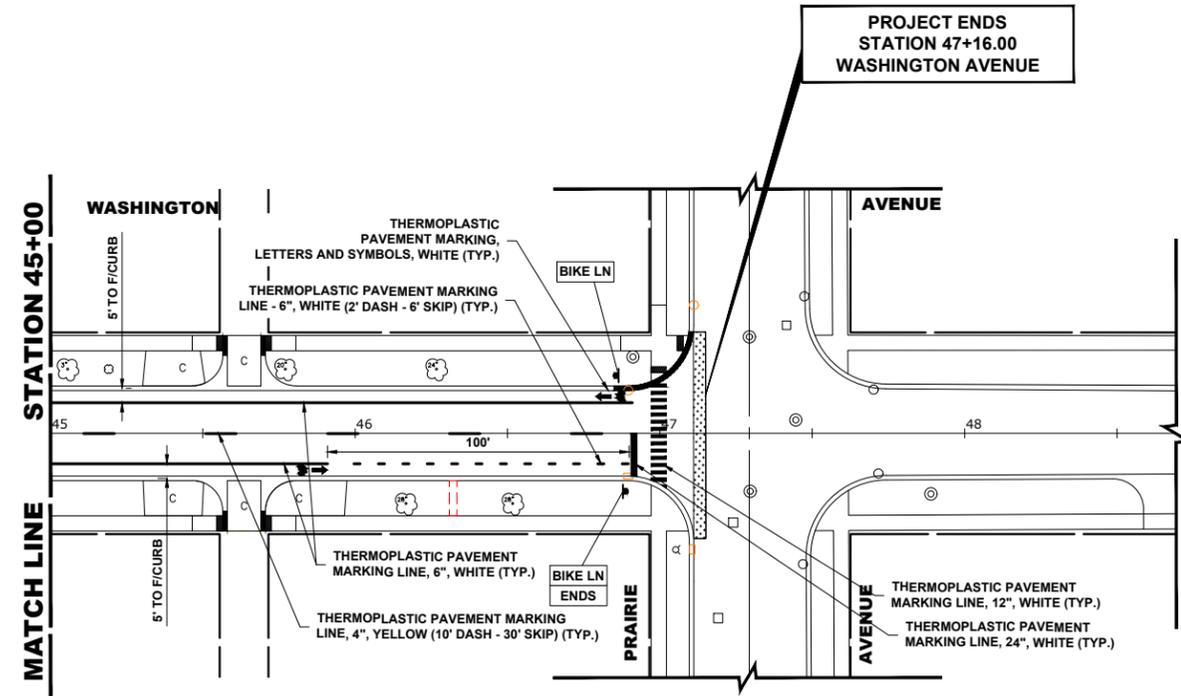

PROPOSED IMPROVEMENTS

SYMBOL	DESCRIPTION
	METAL POST - TYPE A

Drawing file: W:\Projects_by_Village\Brockfield\12521006 - Washington Ave. LEFO\Site\Washington Ave.dwg Mar 07, 2022 - 11:58am





HANCOCK ENGINEERING
 100% Years of Experience
 ♦ CMI Engineers
 ♦ Municipal Consultants
 ♦ Established 1911
 7700 Roosevelt Road
 Wheeling, IL 60090-2702
 Phone: 708/946-0800
 www.hancockeng.com

DESIGNED	-	REVISED	-
DRAWN	ECW, SFB, DMM	REVISED	-
CHECKED	-	REVISED	-
DATE	11-17-21	REVISED	2-15-22 I.D.O.T.

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

PAVEMENT MARKING AND SIGNING PLAN
 SCALE: 1" = 30'
 SHEET NO. 4 OF 4 SHEETS
 STA. 38+50 TO STA. 48+00

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	17
FED. ROAD DIST. NO. 1		ILLINOIS	CONTRACT NO. 61H70	
			FED. AID PROJECT Z3Q2(622)	
E.H.E. PROJECT NO. 12521006/1				

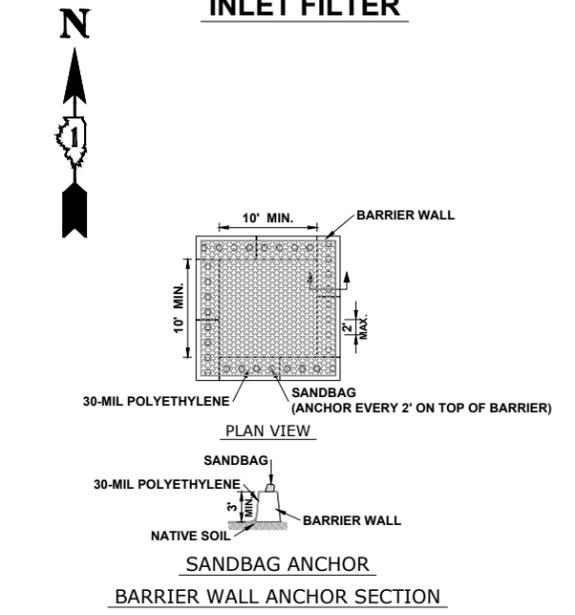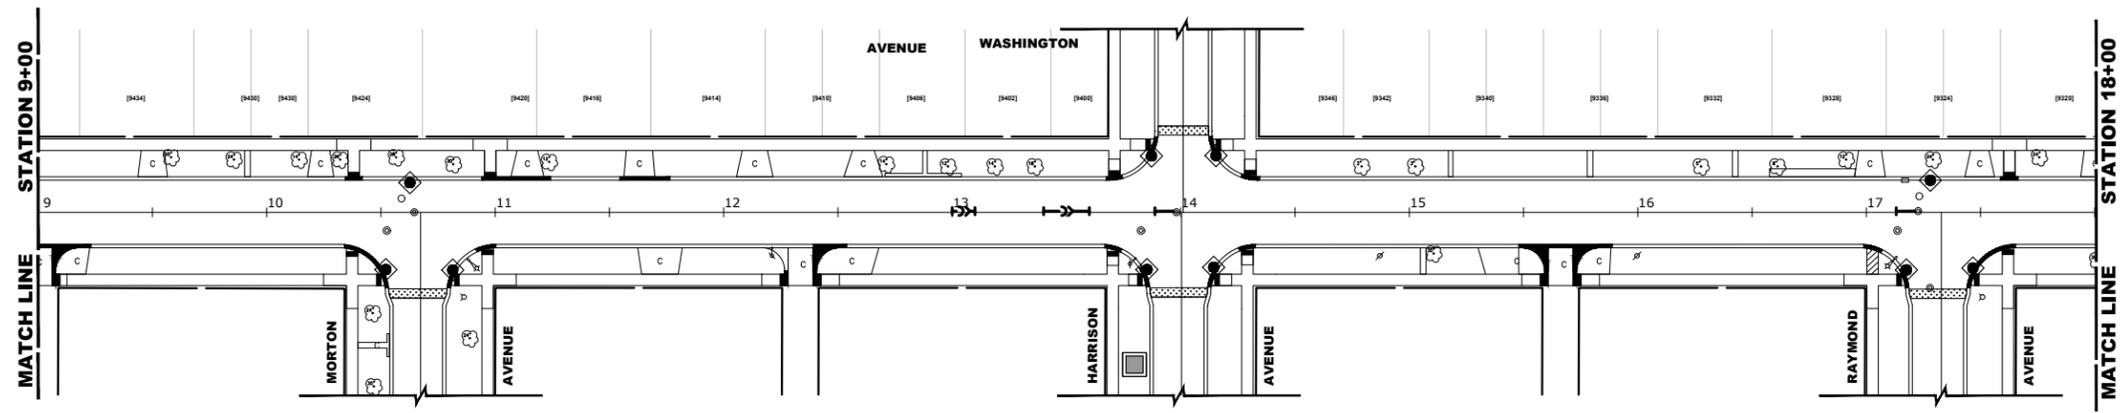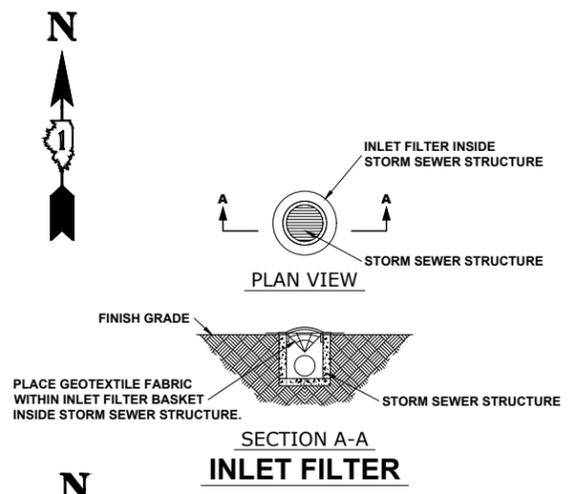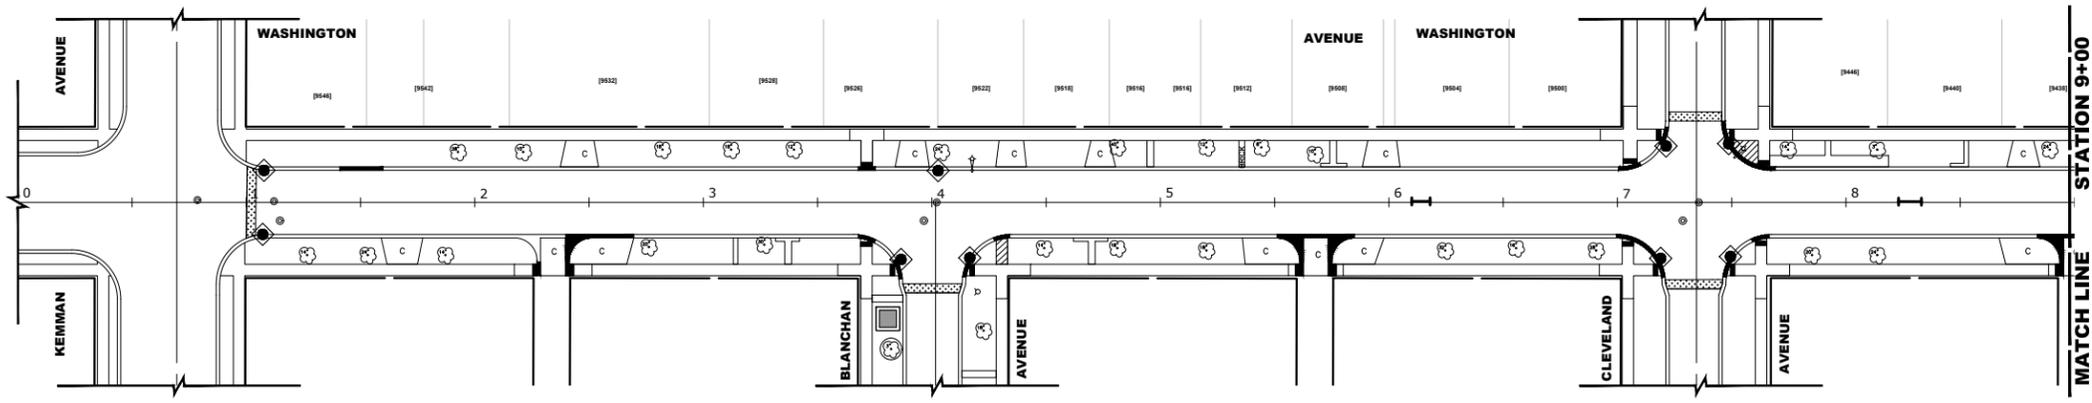

EROSION AND SEDIMENT CONTROL PLAN

THE EXISTING LAND COVER CONSISTS OF PAVED STREETS WITH MINOR GRASS PARKWAYS LOCATED IN A RESIDENTIAL AREA. THE AREAS ADJACENT TO THE PROJECT SITE ARE COMPRISED OF DENSE RESIDENTIAL PROPERTIES. FLOOD PROTECTION AREAS AND POINTS OF DISCHARGE TO JURISDICTIONAL WATERS OF THE U.S. DO NOT EXIST ON THIS PROJECT. WE DO NOT BELIEVE THERE ARE ANY AREAS SUSCEPTIBLE TO EROSION OR SEDIMENTATION DUE TO THESE IMPROVEMENTS. SOIL DATA IS NOT AVAILABLE BUT, PAST PROJECTS IN THE SUBJECT VILLAGE CONCLUDE THAT THE EXISTING SOIL CONSISTS OF CLAY WITH SOME MINOR SILT AND TRACES OF SAND.

PRIOR TO ANY SOIL/PAVEMENT DISTURBANCE, INLET FILTER ASSEMBLIES SHALL BE INSTALLED AS SHOWN ON PLANS.

THE INLET FILTER, PRIMARY PURPOSE IS TO TRAP SEDIMENT, REQUIRED FOR THIS PROJECT WILL BE A DROP IN INLET PROTECTION DEVICE SIMILAR TO FLEXSTORM INLET FILTERS. INLET FILTERS OF THIS TYPE HAVE BEEN USED ON PAST PROJECTS OF SIMILAR SIZE AND SCOPE AND HAVE HAD SATISFACTORY RESULTS.

THE INLET FILTER ASSEMBLY SHALL BE APPROVED BY THE ENGINEER OR VILLAGE PRIOR TO ORDERING AND INSTALLATION. THE INLET FILTER SHALL BE INSPECTED WEEKLY AND AFTER A 0.5 INCH RAIN EVENT BY THE ENGINEER. THE ENGINEER WILL REPORT ANY ISSUES, VIA VERBAL OR WRITTEN COMMUNICATION, THAT NEED TO BE ADDRESSED BY THE CONTRACTOR.

MAINTENANCE OF THE PROPOSED INLET FILTER WILL BE PER MANUFACTURE RECOMMENDATIONS AND WILL BE DONE BY THE CONTRACTOR. TYPICAL MAINTENANCE PRACTICES INCLUDE INSPECTION AFTER A RUNOFF EVENT, SEDIMENT REMOVAL AT 50% CAPACITY, AND

REPAIRS/REPLACEMENT AS NEEDED.

PRIOR TO ANY PORTLAND CEMENT CONCRETE (PCC) POUR, CONCRETE WASHOUT BOXES SHALL BE INSTALLED AS SHOWN ON PLANS OR AS DIRECTED BY THE ENGINEER.

CONCRETE WASHOUT BOXES, PRIMARY PURPOSE IS TO CONTAIN CONCRETE LIQUIDS AND PREVENT CONCRETE LIQUID RUNOFF FROM ENTERING SEWERS OR WATERWAYS, REQUIRED FOR THIS PROJECT WILL CONSIST OF A BARRIER WALL LINED WITH 30-MIL POLYETHYLENE OR AN ENGINEER APPROVED EQUAL WASHOUT. CONCRETE WASHOUT BOXES OF THIS TYPE HAVE BEEN USED ON PAST PROJECTS OF SIMILAR SIZE AND SCOPE AND HAVE HAD SATISFACTORY RESULTS.

THE PLAN FOR THE CONCRETE WASHOUT BOX SHALL BE SUBMITTED AND APPROVED BY THE ENGINEER OR VILLAGE PRIOR TO INSTALLATION AND WILL BE INSPECTED AFTER INSTALLATION. THE WASHOUT BOX SHALL BE INSPECTED PRIOR TO A CONCRETE POUR AND AFTER A CONCRETE POUR BY THE ENGINEER. THE ENGINEER WILL REPORT ANY ISSUES, VIA VERBAL OR WRITTEN COMMUNICATION, THAT NEED TO BE ADDRESSED BY THE CONTRACTOR.

MAINTENANCE OF THE PROPOSED CONCRETE WASHOUT BOXES WILL BE DONE BY THE CONTRACTOR. TYPICAL MAINTENANCE PRACTICES INCLUDE REPLACING DAMAGED LINER, DISPOSING OF SOLIDIFIED CONCRETE WASHOUT, AND REMOVAL OF ANY DISCHARGES WITHIN 24 HOURS.

ALL DISPOSAL OF CONSTRUCTION MATERIAL, AND SOLIDIFIED CONCRETE SHALL BE AT A CCDD (CLEAN CONSTRUCTION AND DEMOLITION DEBRIS) FACILITY

NOTES

- SEE IDOT STANDARD 280001-07 FOR TEMPORARY EROSION CONTROL SYSTEMS.
- THE CONTRACTOR SHALL ENSURE THAT ADJACENT PROPERTIES REMAIN PROTECTED FROM SEDIMENT DEPOSITION.
- SOIL STOCKPILES SHALL BE PROTECTED WITH PERIMETER EROSION BARRIER OR OTHER EROSION PROTECTION SPECIFIED BY THE RESIDENT ENGINEER. THE COST SHALL BE INCLUDED IN THE UNIT PRICE FOR THE INDIVIDUAL SOIL MATERIALS.
- WHEREVER CONSTRUCTION VEHICLE ACCESS ROUTES INTERSECT PAVED PUBLIC ROADS. PROVISIONS SHALL BE MADE TO MINIMIZE THE TRANSPORT OF SEDIMENT BY RUNOFF OR VEHICLE TRACKING ONTO THE PAVED SURFACE. THE PROVISIONS MAY INCLUDE SPRAYING VEHICLE WHEELS TO CLEAR SEDIMENT BEFORE EXITING THE CONSTRUCTION SITE OR OTHER MEASURES APPROVED BY THE ENGINEER.
- INLET FILTERS SHALL BE PAID FOR UNDER THE INLET FILTER PAY ITEM. THE COST OF THE CONCRETE WASHOUTS SHALL BE INCLUDED IN THE COST OF THE CONTRACT.
- INLET FILTER SHALL BE INSTALLED PRIOR TO CONSTRUCTION AND SHALL BE REMOVED AFTER CONSTRUCTION IS COMPLETED. FILTERS WILL BE INSPECTED WEEKLY AND THE CONTRACTOR WILL BE NOTIFIED OF ANY CORRECTIVE MEASURES THAT WILL BE REQUIRED TO BE MADE BY THE CONTRACTOR.

NOTES

- MAINTAINING TEMPORARY CONCRETE FACILITIES SHALL INCLUDE REMOVING AND DISPOSING OF HARDEN CONCRETE AND/OR SLURRY AND RETURNING THE FACILITIES TO A FUNCTIONAL CONDITION.
- FACILITY SHALL BE CLEANED OR RECONSTRUCTED IN A NEW AREA ONCE WASHOUT BECOMES TWO-THIRDS FULL.

CONCRETE WASHOUT

LEGEND

SYMBOL	DESCRIPTION
	INLET FILTER/SEDIMENT CONTROL, DRAINAGE STRUCTURE, INLET FILTER CLEANING
	CONCRETE WASHOUT

CONSTRUCTION SEQUENCE :

- INSTALL EROSION CONTROL MEASURES
- COMPLETE ALL UNDERGROUND WORK
- PAVEMENT PATCHING
- RESURFACE PAVEMENTS
- RESTORE DAMAGED AREAS ADJACENT TO IMPROVEMENTS
- REMOVE EROSION CONTROL MEASURES

HANCOCK ENGINEERING
 CIVIL ENGINEERS
 MUNICIPAL CONSULTANTS
 ESTABLISHED 1911
 7700 Roosevelt Road
 Wheeling, IL 60090-2902
 Phone: 708/945-0800
 www.hancockeng.com





DESIGNED	-	REVISED	-
DRAWN	- ECW, SFB, DMM	REVISED	-
CHECKED	-	REVISED	-
DATE	- 11-17-21	REVISED	- 2-15-22 I.D.O.T.

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

EROSION AND SEDIMENT CONTROL PLAN
 SCALE: 1" = 40' SHEET NO. 1 OF 3 SHEETS STA. 0+00 TO STA. 18+00

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	18
CONTRACT NO. 61H70			FED. AID PROJECT Z3Q2(622)	
E.H.E. PROJECT NO. 125210601				

Drawing file: W:\Projects_by_Village\Brookfield\12521066 - Washington Ave UPO\Site\Washington Ave.dwg Mar 07, 2022 - 11:02am

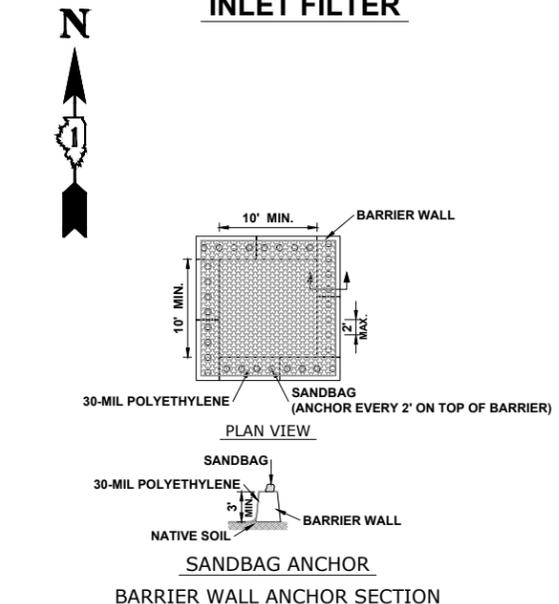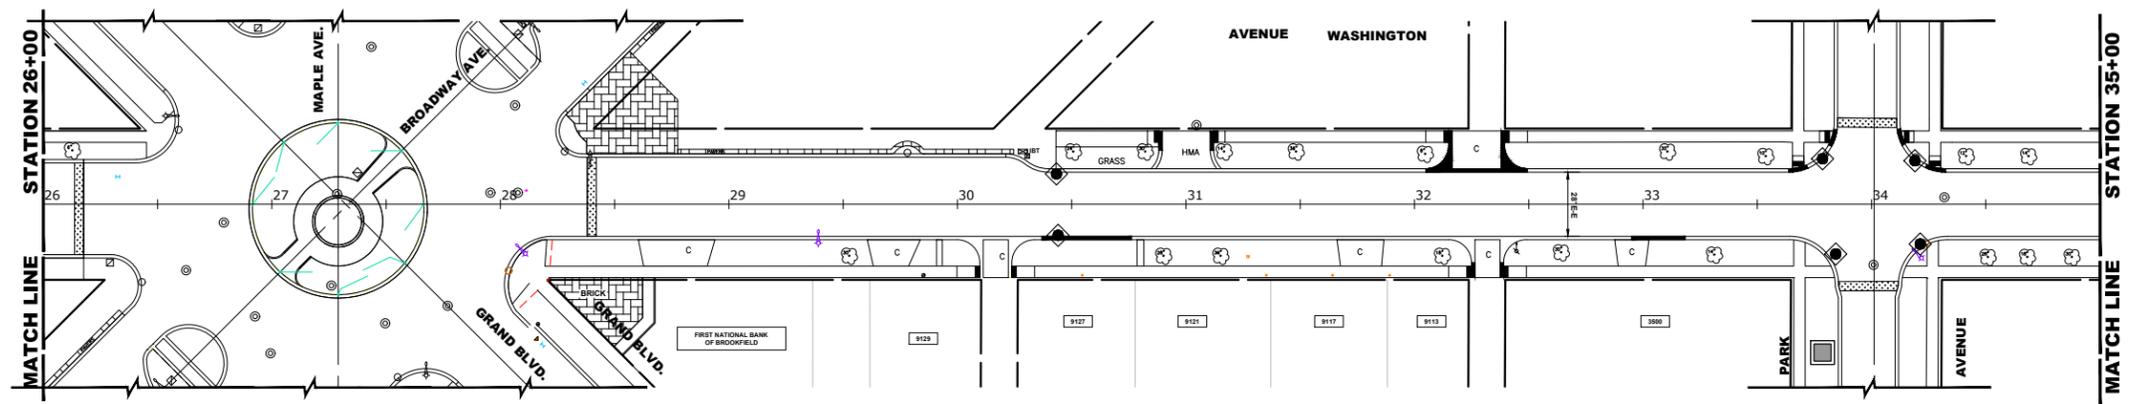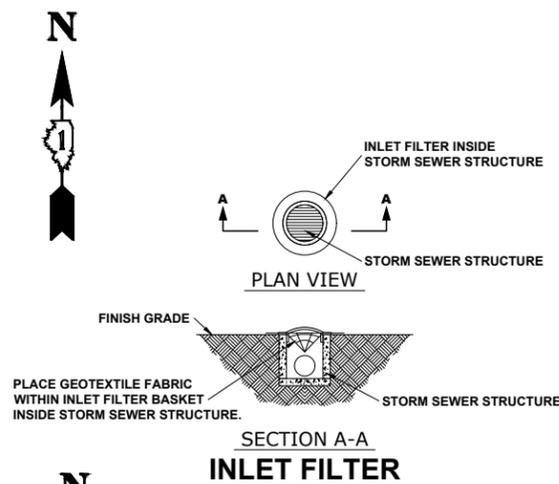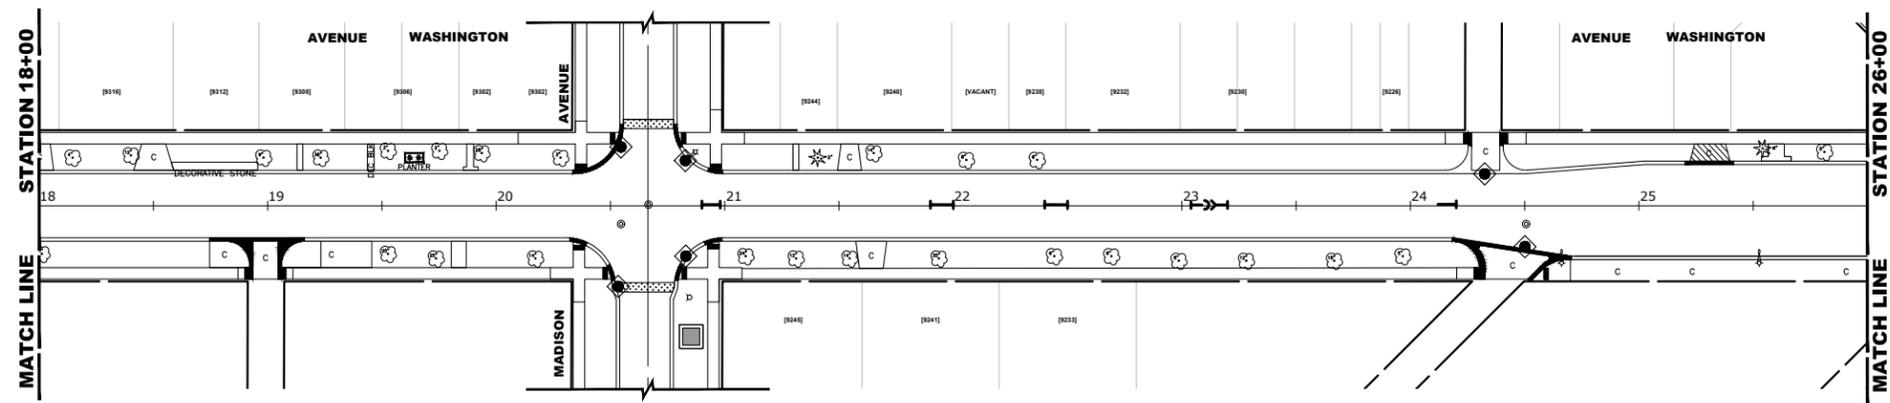

EROSION AND SEDIMENT CONTROL PLAN

THE EXISTING LAND COVER CONSISTS OF PAVED STREETS WITH MINOR GRASS PARKWAYS LOCATED IN A RESIDENTIAL AREA. THE AREAS ADJACENT TO THE PROJECT SITE ARE COMPRISED OF DENSE RESIDENTIAL PROPERTIES. FLOOD PROTECTION AREAS AND POINTS OF DISCHARGE TO JURISDICTIONAL WATERS OF THE U.S. DO NOT EXIST ON THIS PROJECT. WE DO NOT BELIEVE THERE ARE ANY AREAS SUSCEPTIBLE TO EROSION OR SEDIMENTATION DUE TO THESE IMPROVEMENTS. SOIL DATA IS NOT AVAILABLE BUT, PAST PROJECTS IN THE SUBJECT VILLAGE CONCLUDE THAT THE EXISTING SOIL CONSISTS OF CLAY WITH SOME MINOR SILT AND TRACES OF SAND.

PRIOR TO ANY SOIL/PAVEMENT DISTURBANCE, INLET FILTER ASSEMBLIES SHALL BE INSTALLED AS SHOWN ON PLANS.

THE INLET FILTER, PRIMARY PURPOSE IS TO TRAP SEDIMENT, REQUIRED FOR THIS PROJECT WILL BE A DROP IN INLET PROTECTION DEVICE SIMILAR TO FLEXSTORM INLET FILTERS. INLET FILTERS OF THIS TYPE HAVE BEEN USED ON PAST PROJECTS OF SIMILAR SIZE AND SCOPE AND HAVE HAD SATISFACTORY RESULTS.

THE INLET FILTER ASSEMBLY SHALL BE APPROVED BY THE ENGINEER OR VILLAGE PRIOR TO ORDERING AND INSTALLATION. THE INLET FILTER SHALL BE INSPECTED WEEKLY AND AFTER A 0.5 INCH RAIN EVENT BY THE ENGINEER. THE ENGINEER WILL REPORT ANY ISSUES, VIA VERBAL OR WRITTEN COMMUNICATION, THAT NEED TO BE ADDRESSED BY THE CONTRACTOR.

MAINTENANCE OF THE PROPOSED INLET FILTER WILL BE PER MANUFACTURE RECOMMENDATIONS AND WILL BE DONE BY THE CONTRACTOR. TYPICAL MAINTENANCE PRACTICES INCLUDE INSPECTION AFTER A RUNOFF EVENT, SEDIMENT REMOVAL AT 50% CAPACITY, AND

REPAIRS/REPLACEMENT AS NEEDED.

PRIOR TO ANY PORTLAND CEMENT CONCRETE (PCC) POUR, CONCRETE WASHOUT BOXES SHALL BE INSTALLED AS SHOWN ON PLANS OR AS DIRECTED BY THE ENGINEER.

CONCRETE WASHOUT BOXES, PRIMARY PURPOSE IS TO CONTAIN CONCRETE LIQUIDS AND PREVENT CONCRETE LIQUID RUNOFF FROM ENTERING SEWERS OR WATERWAYS, REQUIRED FOR THIS PROJECT WILL CONSIST OF A BARRIER WALL LINED WITH 30-MIL POLYETHYLENE OR AN ENGINEER APPROVED EQUAL WASHOUT. CONCRETE WASHOUT BOXES OF THIS TYPE HAVE BEEN USED ON PAST PROJECTS OF SIMILAR SIZE AND SCOPE AND HAVE HAD SATISFACTORY RESULTS.

THE PLAN FOR THE CONCRETE WASHOUT BOX SHALL BE SUBMITTED AND APPROVED BY THE ENGINEER OR VILLAGE PRIOR TO INSTALLATION AND WILL BE INSPECTED AFTER INSTALLATION. THE WASHOUT BOX SHALL BE INSPECTED PRIOR TO A CONCRETE POUR AND AFTER A CONCRETE POUR BY THE ENGINEER. THE ENGINEER WILL REPORT ANY ISSUES, VIA VERBAL OR WRITTEN COMMUNICATION, THAT NEED TO BE ADDRESSED BY THE CONTRACTOR.

MAINTENANCE OF THE PROPOSED CONCRETE WASHOUT BOXES WILL BE DONE BY THE CONTRACTOR. TYPICAL MAINTENANCE PRACTICES INCLUDE REPLACING DAMAGED LINER, DISPOSING OF SOLIDIFIED CONCRETE WASHOUT, AND REMOVAL OF ANY DISCHARGES WITHIN 24 HOURS.

ALL DISPOSAL OF CONSTRUCTION MATERIAL, AND SOLIDIFIED CONCRETE SHALL BE AT A CCDD (CLEAN CONSTRUCTION AND DEMOLITION DEBRIS) FACILITY

NOTES

- SEE IDOT STANDARD 280001-07 FOR TEMPORARY EROSION CONTROL SYSTEMS.
- THE CONTRACTOR SHALL ENSURE THAT ADJACENT PROPERTIES REMAIN PROTECTED FROM SEDIMENT DEPOSITION.
- SOIL STOCKPILES SHALL BE PROTECTED WITH PERIMETER EROSION BARRIER OR OTHER EROSION PROTECTION SPECIFIED BY THE RESIDENT ENGINEER. THE COST SHALL BE INCLUDED IN THE UNIT PRICE FOR THE INDIVIDUAL SOIL MATERIALS.
- WHEREVER CONSTRUCTION VEHICLE ACCESS ROUTES INTERSECT PAVED PUBLIC ROADS. PROVISIONS SHALL BE MADE TO MINIMIZE THE TRANSPORT OF SEDIMENT BY RUNOFF OR VEHICLE TRACKING ONTO THE PAVED SURFACE. THE PROVISIONS MAY INCLUDE SPRAYING VEHICLE WHEELS TO CLEAR SEDIMENT BEFORE EXITING THE CONSTRUCTION SITE OR OTHER MEASURES APPROVED BY THE ENGINEER.
- INLET FILTERS SHALL BE PAID FOR UNDER THE INLET FILTER PAY ITEM. THE COST OF THE CONCRETE WASHOUTS SHALL BE INCLUDED IN THE COST OF THE CONTRACT.
- INLET FILTER SHALL BE INSTALLED PRIOR TO CONSTRUCTION AND SHALL BE REMOVED AFTER CONSTRUCTION IS COMPLETED. FILTERS WILL BE INSPECTED WEEKLY AND THE CONTRACTOR WILL BE NOTIFIED OF ANY CORRECTIVE MEASURES THAT WILL BE REQUIRED TO BE MADE BY THE CONTRACTOR.

NOTES

- MAINTAINING TEMPORARY CONCRETE FACILITIES SHALL INCLUDE REMOVING AND DISPOSING OF HARDEN CONCRETE AND/OR SLURRY AND RETURNING THE FACILITIES TO A FUNCTIONAL CONDITION.
- FACILITY SHALL BE CLEANED OR RECONSTRUCTED IN A NEW AREA ONCE WASHOUT BECOMES TWO-THIRDS FULL.

CONCRETE WASHOUT

LEGEND

SYMBOL	DESCRIPTION
	INLET FILTER/SEDIMENT CONTROL, DRAINAGE STRUCTURE, INLET FILTER CLEANING
	CONCRETE WASHOUT

CONSTRUCTION SEQUENCE :

- INSTALL EROSION CONTROL MEASURES
- COMPLETE ALL UNDERGROUND WORK
- PAVEMENT PATCHING
- RESURFACE PAVEMENTS
- RESTORE DAMAGED AREAS ADJACENT TO IMPROVEMENTS
- REMOVE EROSION CONTROL MEASURES

HANCOCK ENGINEERING
 CMI Engineers
 Municipal Consultants
 Established 1911

DESIGNED	-	REVISED	-
DRAWN	- ECW, SFB, DMM	REVISED	-
CHECKED	-	REVISED	-
DATE	- 11-17-21	REVISED	- 2-15-22 I.D.O.T.





**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

EROSION AND SEDIMENT CONTROL PLAN

SCALE: 1" = 40' SHEET NO. 2 OF 3 SHEETS STA. 18+00 TO STA. 35+00

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	19
CONTRACT NO. 61H70				
FED. ROAD DIST. NO. 1 ILLINOIS				
FED. AID PROJECT Z3Q2(622)				
E.H.E. PROJECT NO. 125210601				

Drawing file: W:\Projects_by_Village\Brookfield\12521066 - Washington Ave URF\Site\Washington Ave.dwg Mar 07, 2022 - 11:25am

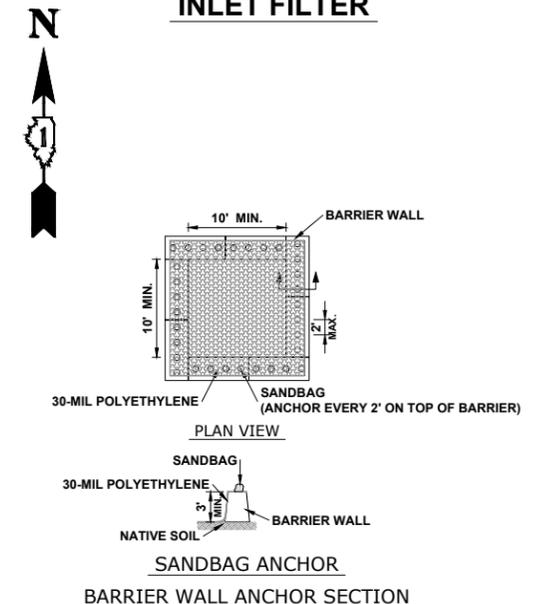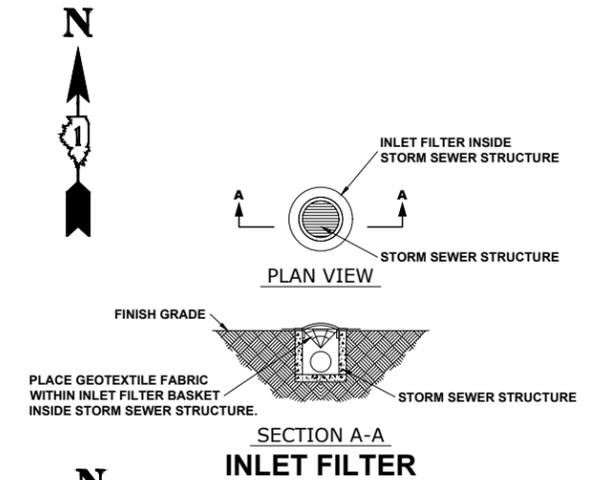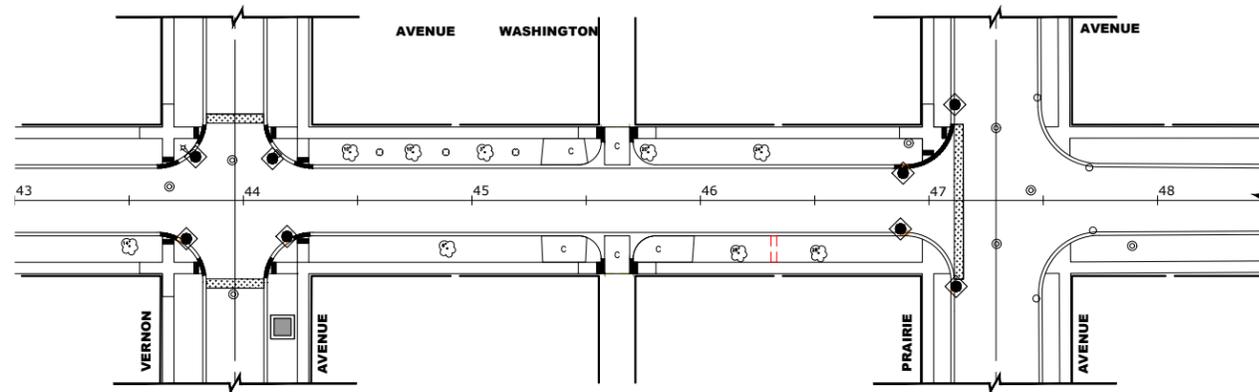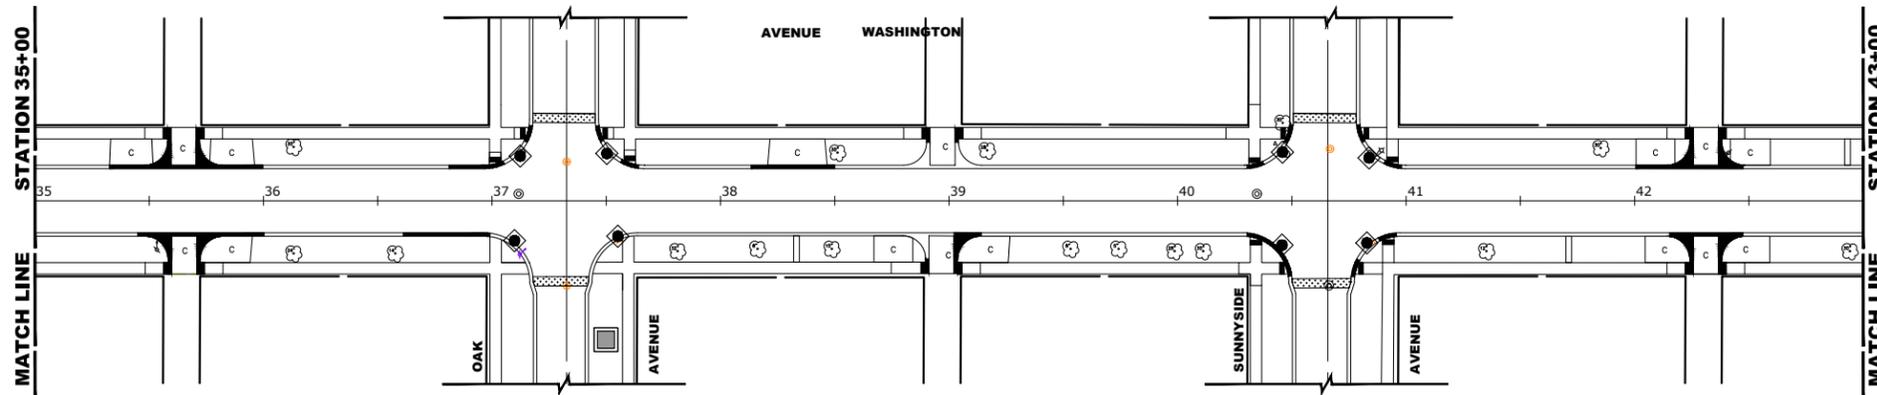

EROSION AND SEDIMENT CONTROL PLAN

THE EXISTING LAND COVER CONSISTS OF PAVED STREETS WITH MINOR GRASS PARKWAYS LOCATED IN A RESIDENTIAL AREA. THE AREAS ADJACENT TO THE PROJECT SITE ARE COMPRISED OF DENSE RESIDENTIAL PROPERTIES. FLOOD PROTECTION AREAS AND POINTS OF DISCHARGE TO JURISDICTIONAL WATERS OF THE U.S. DO NOT EXIST ON THIS PROJECT. WE DO NOT BELIEVE THERE ARE ANY AREAS SUSCEPTIBLE TO EROSION OR SEDIMENTATION DUE TO THESE IMPROVEMENTS. SOIL DATA IS NOT AVAILABLE BUT, PAST PROJECTS IN THE SUBJECT VILLAGE CONCLUDE THAT THE EXISTING SOIL CONSISTS OF CLAY WITH SOME MINOR SILT AND TRACES OF SAND.

PRIOR TO ANY SOIL/PAVEMENT DISTURBANCE, INLET FILTER ASSEMBLIES SHALL BE INSTALLED AS SHOWN ON PLANS.

THE INLET FILTER, PRIMARY PURPOSE IS TO TRAP SEDIMENT, REQUIRED FOR THIS PROJECT WILL BE A DROP IN INLET PROTECTION DEVICE SIMILAR TO FLEXSTORM INLET FILTERS. INLET FILTERS OF THIS TYPE HAVE BEEN USED ON PAST PROJECTS OF SIMILAR SIZE AND SCOPE AND HAVE HAD SATISFACTORY RESULTS.

THE INLET FILTER ASSEMBLY SHALL BE APPROVED BY THE ENGINEER OR VILLAGE PRIOR TO ORDERING AND INSTALLATION. THE INLET FILTER SHALL BE INSPECTED WEEKLY AND AFTER A 0.5 INCH RAIN EVENT BY THE ENGINEER. THE ENGINEER WILL REPORT ANY ISSUES, VIA VERBAL OR WRITTEN COMMUNICATION, THAT NEED TO BE ADDRESSED BY THE CONTRACTOR.

MAINTENANCE OF THE PROPOSED INLET FILTER WILL BE PER MANUFACTURE RECOMMENDATIONS AND WILL BE DONE BY THE CONTRACTOR. TYPICAL MAINTENANCE PRACTICES INCLUDE INSPECTION AFTER A RUNOFF EVENT, SEDIMENT REMOVAL AT 50% CAPACITY, AND

REPAIRS/REPLACEMENT AS NEEDED.

PRIOR TO ANY PORTLAND CEMENT CONCRETE (PCC) POUR, CONCRETE WASHOUT BOXES SHALL BE INSTALLED AS SHOWN ON PLANS OR AS DIRECTED BY THE ENGINEER.

CONCRETE WASHOUT BOXES, PRIMARY PURPOSE IS TO CONTAIN CONCRETE LIQUIDS AND PREVENT CONCRETE LIQUID RUNOFF FROM ENTERING SEWERS OR WATERWAYS, REQUIRED FOR THIS PROJECT WILL CONSIST OF A BARRIER WALL LINED WITH 30-MIL POLYETHYLENE OR AN ENGINEER APPROVED EQUAL WASHOUT. CONCRETE WASHOUT BOXES OF THIS TYPE HAVE BEEN USED ON PAST PROJECTS OF SIMILAR SIZE AND SCOPE AND HAVE HAD SATISFACTORY RESULTS.

THE PLAN FOR THE CONCRETE WASHOUT BOX SHALL BE SUBMITTED AND APPROVED BY THE ENGINEER OR VILLAGE PRIOR TO INSTALLATION AND WILL BE INSPECTED AFTER INSTALLATION. THE WASHOUT BOX SHALL BE INSPECTED PRIOR TO A CONCRETE POUR AND AFTER A CONCRETE POUR BY THE ENGINEER. THE ENGINEER WILL REPORT ANY ISSUES, VIA VERBAL OR WRITTEN COMMUNICATION, THAT NEED TO BE ADDRESSED BY THE CONTRACTOR.

MAINTENANCE OF THE PROPOSED CONCRETE WASHOUT BOXES WILL BE DONE BY THE CONTRACTOR. TYPICAL MAINTENANCE PRACTICES INCLUDE REPLACING DAMAGED LINER, DISPOSING OF SOLIDIFIED CONCRETE WASHOUT, AND REMOVAL OF ANY DISCHARGES WITHIN 24 HOURS.

ALL DISPOSAL OF CONSTRUCTION MATERIAL, AND SOLIDIFIED CONCRETE SHALL BE AT A CCDD (CLEAN CONSTRUCTION AND DEMOLITION DEBRIS) FACILITY

NOTES

- SEE IDOT STANDARD 280001-07 FOR TEMPORARY EROSION CONTROL SYSTEMS.
- THE CONTRACTOR SHALL ENSURE THAT ADJACENT PROPERTIES REMAIN PROTECTED FROM SEDIMENT DEPOSITION.
- SOIL STOCKPILES SHALL BE PROTECTED WITH PERIMETER EROSION BARRIER OR OTHER EROSION PROTECTION SPECIFIED BY THE RESIDENT ENGINEER. THE COST SHALL BE INCLUDED IN THE UNIT PRICE FOR THE INDIVIDUAL SOIL MATERIALS.
- WHEREVER CONSTRUCTION VEHICLE ACCESS ROUTES INTERSECT PAVED PUBLIC ROADS. PROVISIONS SHALL BE MADE TO MINIMIZE THE TRANSPORT OF SEDIMENT BY RUNOFF OR VEHICLE TRACKING ONTO THE PAVED SURFACE. THE PROVISIONS MAY INCLUDE SPRAYING VEHICLE WHEELS TO CLEAR SEDIMENT BEFORE EXITING THE CONSTRUCTION SITE OR OTHER MEASURES APPROVED BY THE ENGINEER.
- INLET FILTERS SHALL BE PAID FOR UNDER THE INLET FILTER PAY ITEM. THE COST OF THE CONCRETE WASHOUTS SHALL BE INCLUDED IN THE COST OF THE CONTRACT.
- INLET FILTER SHALL BE INSTALLED PRIOR TO CONSTRUCTION AND SHALL BE REMOVED AFTER CONSTRUCTION IS COMPLETED. FILTERS WILL BE INSPECTED WEEKLY AND THE CONTRACTOR WILL BE NOTIFIED OF ANY CORRECTIVE MEASURES THAT WILL BE REQUIRED TO BE MADE BY THE CONTRACTOR.

NOTES

- MAINTAINING TEMPORARY CONCRETE FACILITIES SHALL INCLUDE REMOVING AND DISPOSING OF HARDEN CONCRETE AND/OR SLURRY AND RETURNING THE FACILITIES TO A FUNCTIONAL CONDITION.
- FACILITY SHALL BE CLEANED OR RECONSTRUCTED IN A NEW AREA ONCE WASHOUT BECOMES TWO-THIRDS FULL.

CONCRETE WASHOUT

LEGEND

SYMBOL	DESCRIPTION
	INLET FILTER/SEDIMENT CONTROL, DRAINAGE STRUCTURE, INLET FILTER CLEANING
	CONCRETE WASHOUT

CONSTRUCTION SEQUENCE :

- INSTALL EROSION CONTROL MEASURES
- COMPLETE ALL UNDERGROUND WORK
- PAVEMENT PATCHING
- RESURFACE PAVEMENTS
- RESTORE DAMAGED AREAS ADJACENT TO IMPROVEMENTS
- REMOVE EROSION CONTROL MEASURES

HANCOCK ENGINEERING
 CMI Engineers
 Municipal Consultants
 Established 1911
 7700 Roosevelt Road
 Wheeling, IL 60090-2902
 Phone: 708/945-0202
 www.hancockeng.com

DESIGNED	- -	REVISED	- -
DRAWN	- ECW, SFB, DMM	REVISED	- -
CHECKED	- -	REVISED	- -
DATE	- 11-17-21	REVISED	- 2-15-22 I.D.O.T.


**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

EROSION AND SEDIMENT CONTROL PLAN


SCALE: 1" = 40' SHEET NO. 3 OF 3 SHEETS STA. 35+00 TO STA. 48+00

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	20
CONTRACT NO. 61H70				
FED. ROAD DIST. NO. 1 ILLINOIS			FED. AID PROJECT Z3Q2(622)	
E.H.E. PROJECT NO. 1252100601				


Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave URF\Site\Washington Ave.dwg Mar 07, 2022 - 11:52am

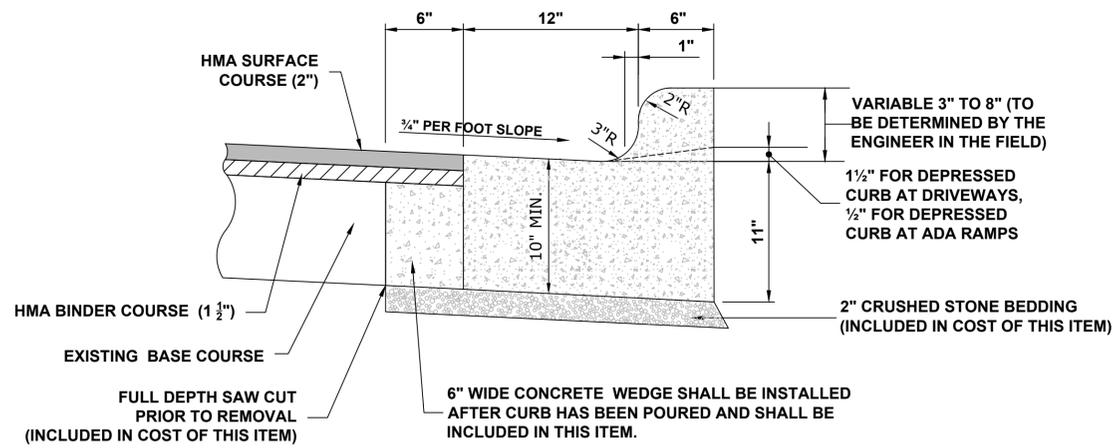


COMBINATION CONCRETE CURB & GUTTER TYPE B-6.12 (MODIFIED)

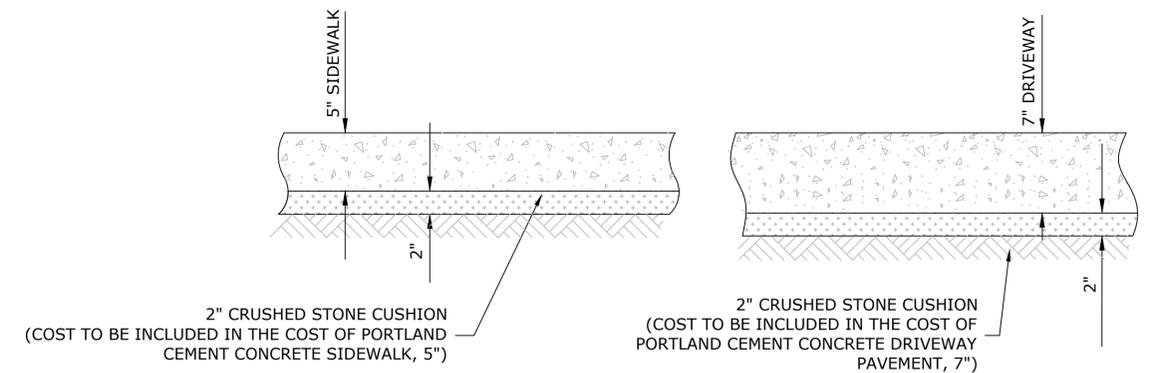

TYPICAL P.C.C. SIDEWALK & DRIVEWAY

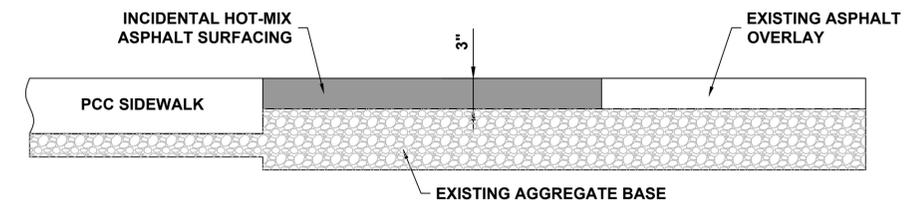


INCIDENTAL HOT-MIX ASPHALT SURFACE

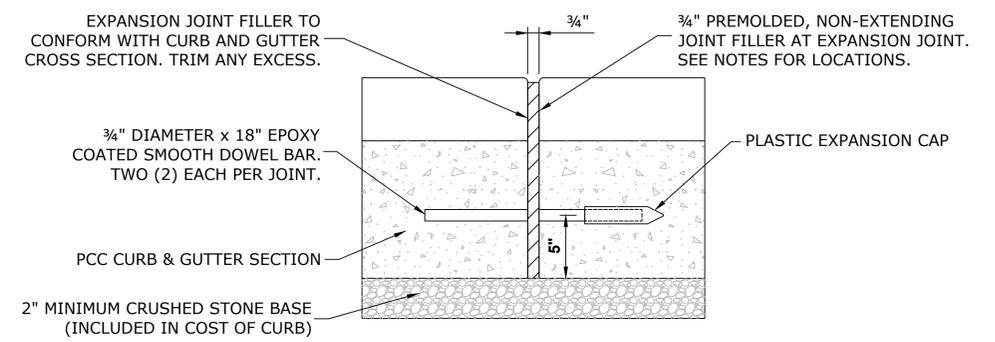


NOTE:
 1. EXPANSION JOINTS ARE TO BE CONSTRUCTED AT ALL PC'S & PT'S OF INTERSECTION RETURNS AND ALL OTHER SHORT RADIUS SECTIONS, CONSTRUCTION JOINTS, EVERY 60' ON TANGENT SECTIONS, AND AS DIRECTED BY THE ENGINEER.

TYPICAL CURB AND GUTTER EXPANSION JOINT

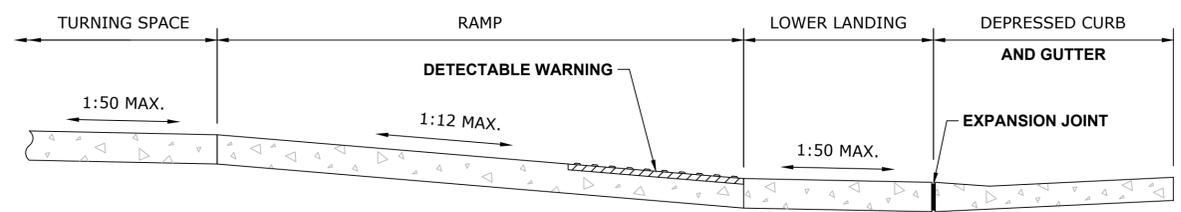


THE RUNNING SLOPE OF THE CURB RAMP SHALL NOT REQUIRE THE CURB LENGTH TO EXCEED 15'.

ADA RAMP

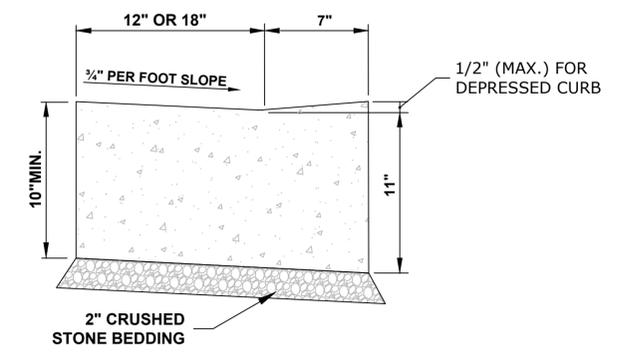

CURB AND GUTTER AT A.D.A. RAMPS

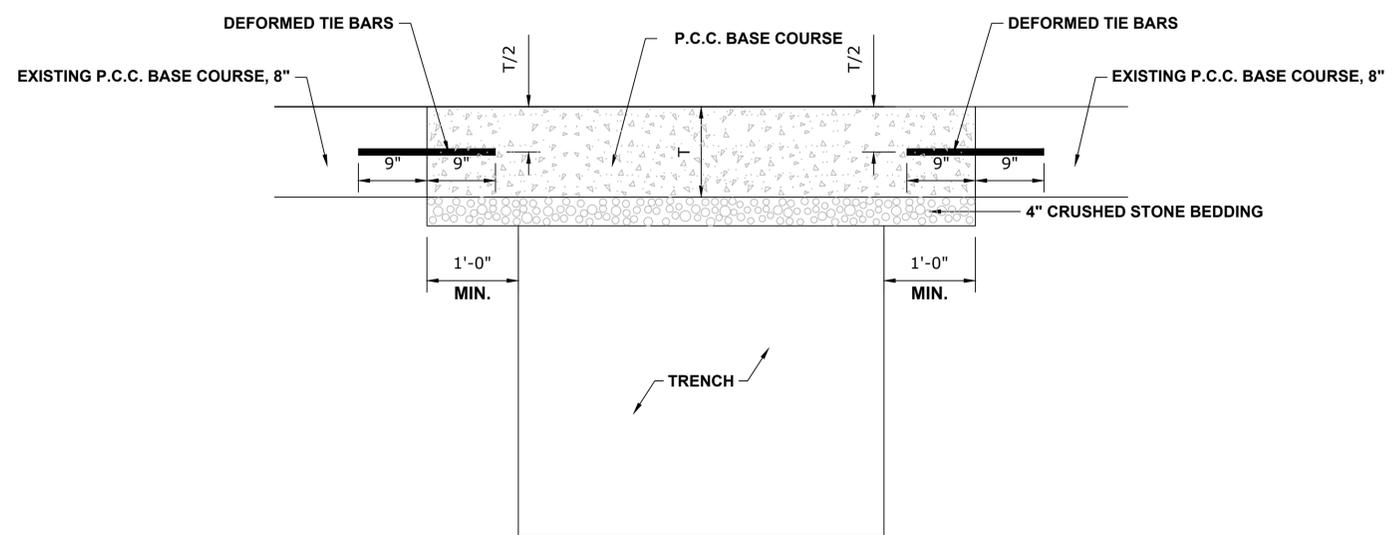

PAVEMENT PATCH

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave LAFO\Details.dwg Mar 28, 2022 - 8:32am

HANCOCK ENGINEERING
 100+ Years of Excellence
 Civil Engineers
 Municipal Consultants
 Established 1911
 9933 Roosevelt Road
 Westchester, IL 60154-2780
 Phone: 708-845-0300
 www.hancock.com


DESIGNED	-	REVISED	-
DRAWN	ECW, SFB, DMM	REVISED	-
CHECKED	-	REVISED	-
DATE	11-17-21	REVISED	2-15-22 I.D.O.T.

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**


JOB SPECIFIC DETAILS

SCALE: NONE SHEET NO. 1 OF 2 SHEETS STA. - TO STA. -



F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	21
CONTRACT NO. 61H70				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT Z3Q2(622)				
E.H.E. PROJECT NO. 1252100601				

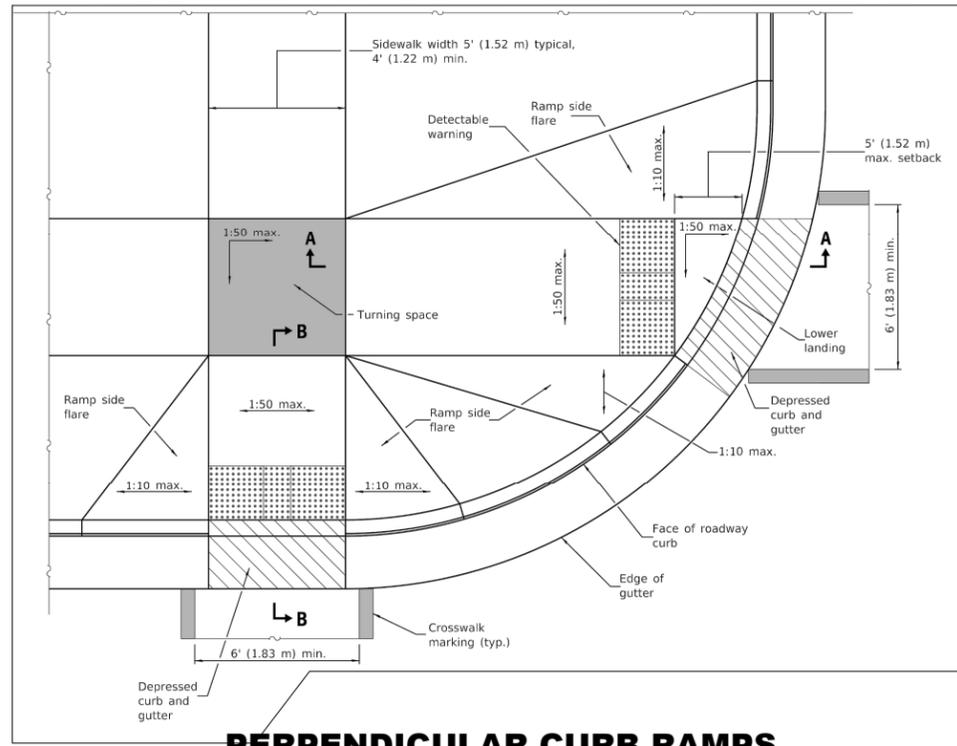


**PERPENDICULAR CURB RAMPS
FOR SIDEWALKS**

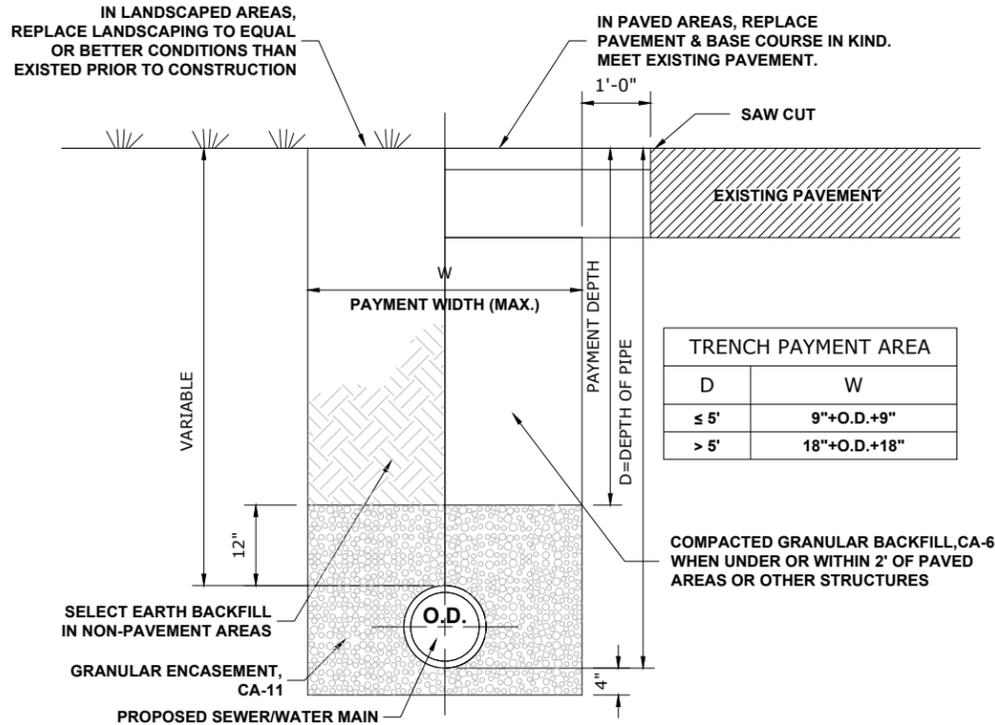


TYPICAL SEWER AND WATER MAIN TRENCH

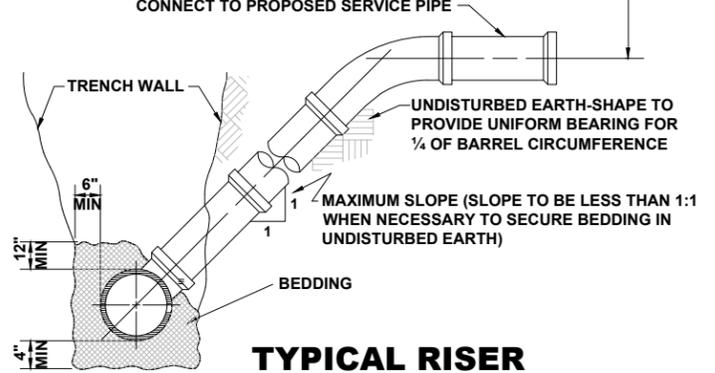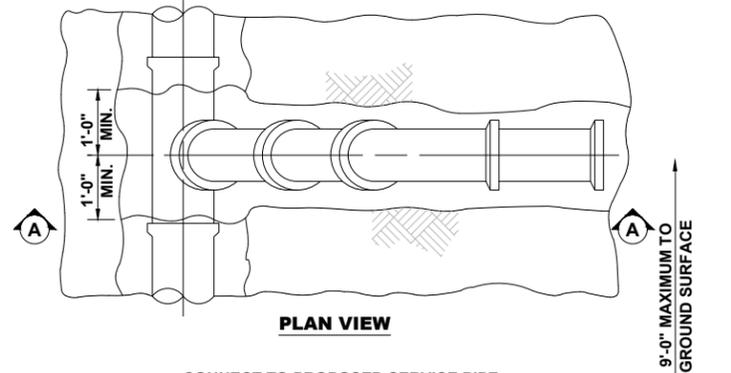


**TYPICAL RISER
FOR SERVICE LATERAL**

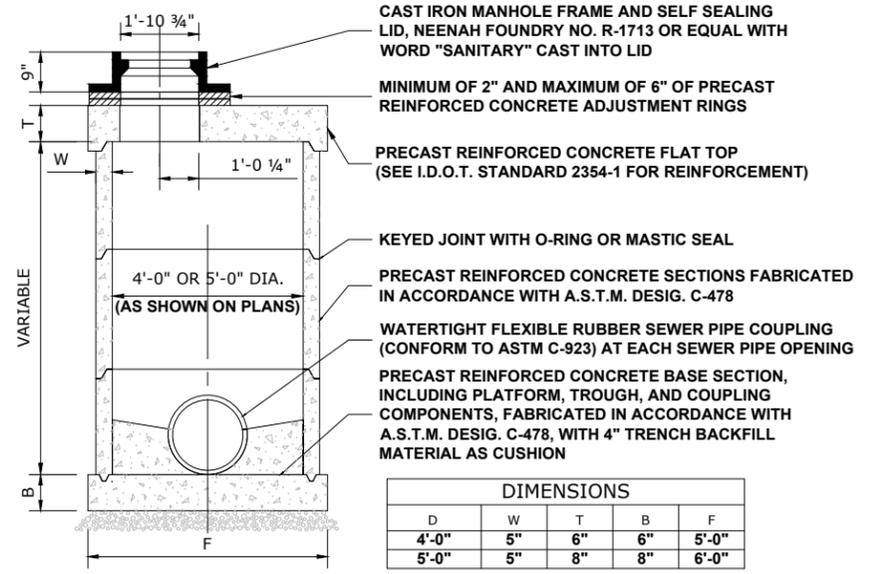

**RESTRICTED DEPTH (COMBINED)
SANITARY MANHOLE**

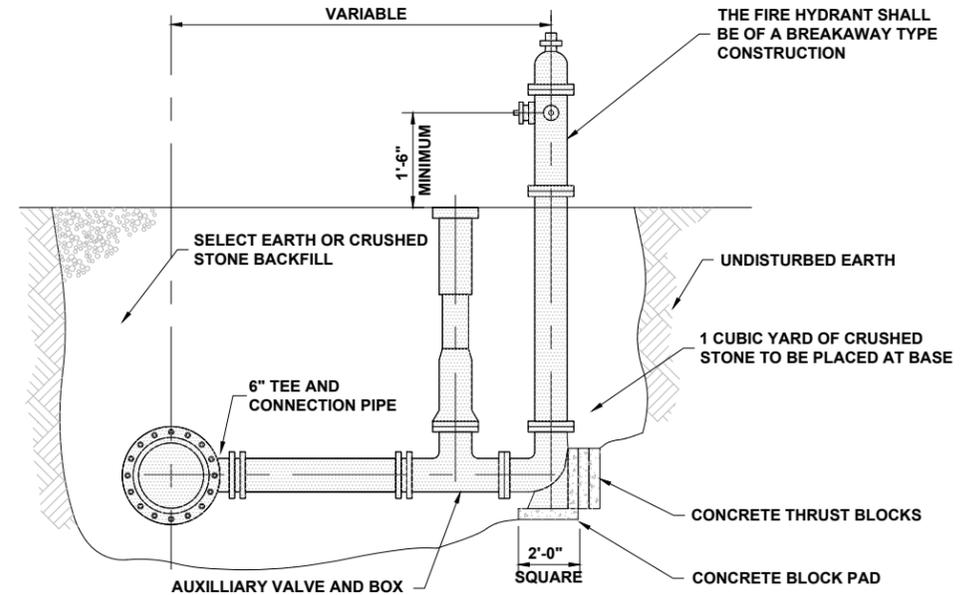

FIRE HYDRANT

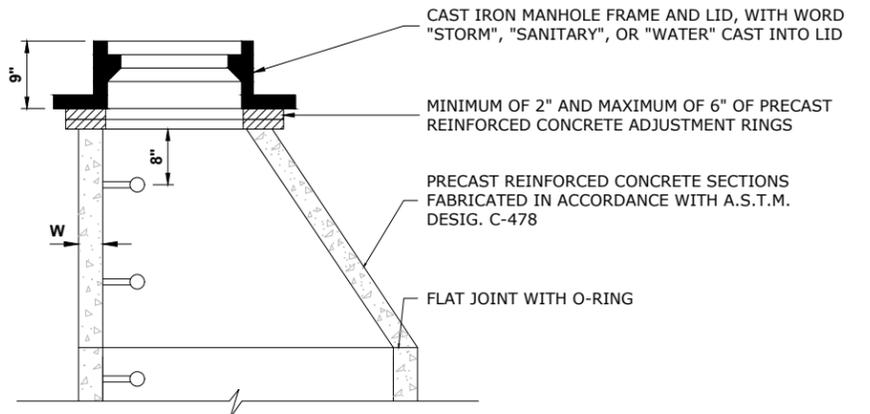

STRUCTURE RECONSTRUCTION

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave L&O\Details.dwg Mar 07, 2022 - 11:03am

HANCOCK ENGINEERING
 Civil Engineers
 Municipal Consultants
 Established 1911
 7900 Roosevelt Road
 Wheeling, IL 60154-2700
 Phone: 708.265.0300
 www.hancockeng.com


DESIGNED	-	REVISED	-
DRAWN	ECW, SFB, DMM	REVISED	-
CHECKED	-	REVISED	-
DATE	11-17-21	REVISED	2-15-22 I.D.O.T.

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

JOB SPECIFIC DETAILS
 SCALE: NONE SHEET NO. 2 OF 2 SHEETS STA. - TO STA. -

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	22
CONTRACT NO. 61H70				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT Z3Q2(622)				

E.H.E. PROJECT NO. 12521006/1

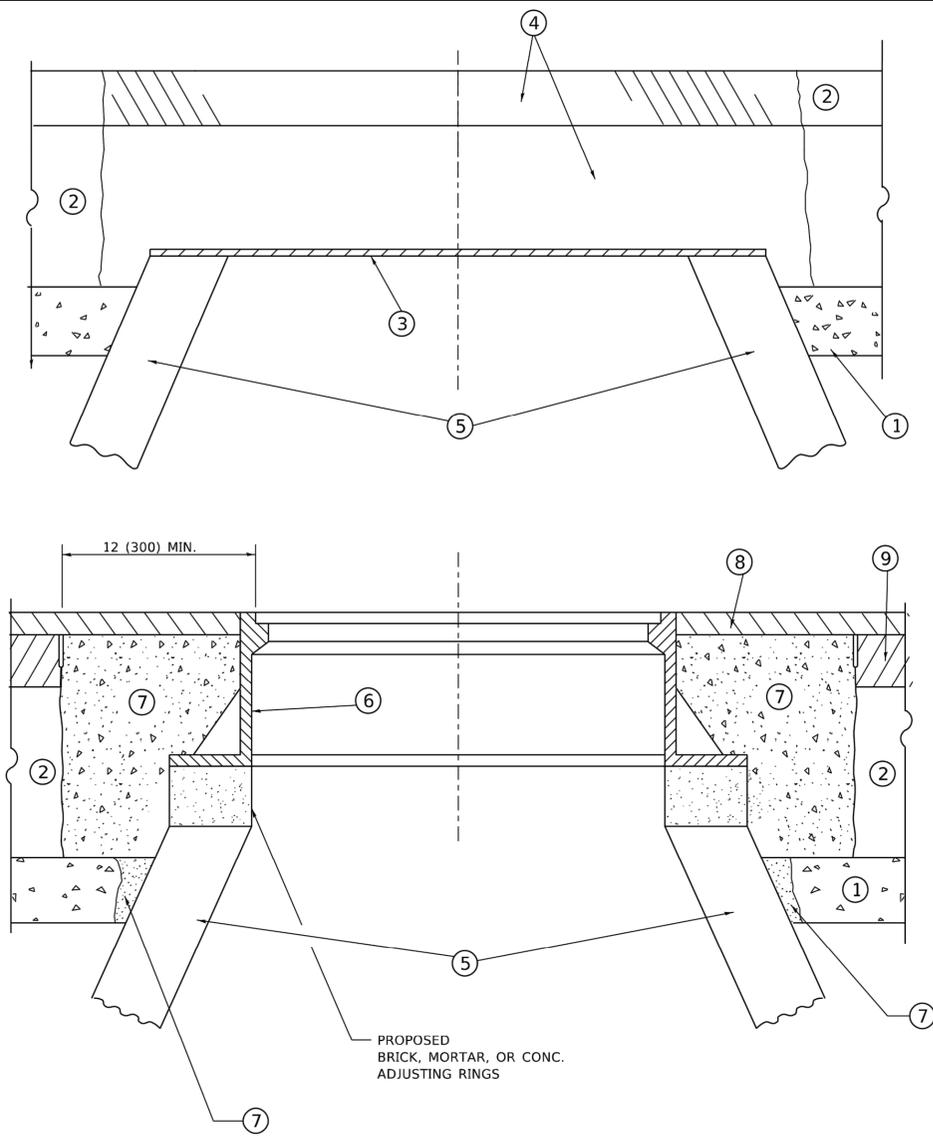

**DETAILS FOR FRAMES AND LIDS ADJUSTMENT
WITH MILLING**

NOTES

1. EXISTING BROKEN FRAMES AND LIDS SHALL BE REMOVED AND DISPOSED OF BY THE CONTRACTOR AND SHALL BE REPLACED AS DIRECTED BY THE ENGINEER. REPLACEMENT FRAMES AND LIDS WILL BE PAID FOR IN ACCORDANCE WITH ARTICLE 109.04 OF THE STANDARD SPECIFICATIONS UNLESS A SEPARATE PAY ITEM HAS BEEN PROVIDED.
2. IF THE EXISTING LIDS ARE OPEN, THE FRAME WILL BE ADJUSTED TO THE ELEVATION OF THE MILLED PAVEMENT SURFACE PRIOR TO THE MILLING OPERATION. THE FRAME WILL NOT BE REMOVED AND COVERED BY THE METAL PLATE.
3. CITY OF CHICAGO CASTINGS ARE THE PROPERTY OF THE CITY AND THE CONTRACTOR SHALL NOTIFY THE CITY FOR REMOVAL AND DISPOSITION OF THE CASTINGS.
4. THE METAL PLATE USED TO COVER THE STRUCTURE SHALL REMAIN THE PROPERTY OF THE CONTRACTOR.

CONSTRUCTION PROCEDURES

- STAGE 1 (BEFORE PAVEMENT MILLING)**
- A) REMOVE A MINIMUM OF 12 (300) OF THE PAVEMENT FROM AROUND THE STRUCTURE.
 - B) REMOVE THE EXISTING FRAME AND LID FROM THE STRUCTURE.
 - C) COVER THE STRUCTURE OPENING WITH A 36 (900) DIAMETER METAL PLATE.
 - D) BACKFILL WITH CRUSHED STONE AND HMA SURFACE MIX APPROVED BY THE ENGINEER. (MIN. 1 1/2 (40) HMA TO REMAIN AFTER MILLING).

- STAGE 2 (AFTER PAVEMENT MILLING)**
- A) REMOVE THE HMA SURFACE MIX AND CRUSHED STONE.
 - B) INSTALL THE FRAME AND LID; ADJUST THE FRAME TO ITS FINAL SURFACE ELEVATION.
 - C) THE SURROUNDING SPACE SHALL BE FILLED WITH CLASS*PP-1 CONCRETE TO THE ELEVATION OF THE SURFACE OF THE EXISTING BASE COURSE OR THE BINDER COURSE.
- * UNLESS OTHERWISE SPECIFIED IN THE PLANS.

THE PROCEDURE EXPLAINED ABOVE SHALL CONFORM TO THE APPLICABLE PORTIONS OF SECTIONS 353, 406, 602, AND 603 OF THE STANDARD SPECIFICATIONS EXCEPT THAT "THE CONTRACTOR SHALL ADJUST THE STRUCTURES TO THE FINISHED PAVEMENT ELEVATION NO MORE THAN 5 CALENDAR DAYS PRIOR TO PLACEMENT OF THE FINAL LIFT OF SURFACE UNLESS APPROVED BY THE ENGINEER."

LEGEND

- | | |
|--|-------------------------------|
| ① SUB-BASE GRANULAR MATERIAL | ⑥ FRAME AND LID (SEE NOTES) |
| ② EXISTING PAVEMENT | ⑦ CLASS*PP-1 CONCRETE |
| ③ 36 (900) DIAMETER METAL PLATE | ⑧ PROPOSED HMA SURFACE COURSE |
| ④ PROPOSED CRUSHED STONE AND HMA SURFACE MIX | ⑨ PROPOSED HMA BINDER COURSE |
| ⑤ EXISTING STRUCTURE | |

LOCATION OF STRUCTURES

THE CONTRACTOR WILL BE REQUIRED TO KEEP A RECORD OF THE LOCATIONS OF THE BURIED STRUCTURES ACCORDING TO THE STATION AND DISTANCE LEFT OR RIGHT OF THE CENTERLINE OF PAVEMENT. UPON COMPLETION OF THE WORK, THE CONTRACTOR WILL DELIVER THE RECORD TO THE ENGINEER.

BASIS OF PAYMENT

1. REMOVING FRAMES AND LIDS ON DRAINAGE AND UTILITY STRUCTURES IN THE PAVEMENT PRIOR TO MILLING, AND ADJUSTING TO FINAL GRADE PRIOR TO PLACING THE SURFACE COURSE, WILL BE PAID FOR AT THE CONTRACT UNIT PRICE EACH FOR "FRAMES AND LIDS TO BE ADJUSTED (SPECIAL)."
2. THIS WORK WILL NOT BE PAID FOR WHEN DRAINAGE AND UTILITY STRUCTURES ARE SPECIFIED FOR PAYMENT AS STRUCTURE RECONSTRUCTION.
3. NEW FRAMES AND LIDS, WHEN SPECIFIED, WILL BE PAID FOR SEPARATELY.
4. WHEN STRUCTURES ARE TO BE ADJUSTED OR RECONSTRUCTED, THE LOWERING AND RAISING OF THE FRAMES AND LIDS WILL NOT BE PAID FOR SEPARATELY BUT WILL BE INCLUDED IN THE COST OF THE CORRESPONDING PAY ITEM.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave LAF0\DOT Standard.dwg Mar 23, 2022 - 1:29pm

USER NAME = demanchelt	DESIGNED - R. SHAH	REVISED - R. BORO 01-01-07
	DRAWN -	REVISED - R. BORO 03-09-11
PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED - R. BORO 12-06-11
PLOT DATE = 2/2/2022	DATE - 10-25-94	REVISED - K. SMITH 02-01-22


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**DETAILS FOR
FRAMES AND LIDS ADJUSTMENT WITH MILLING**


SCALE: NONE SHEET 1 OF 1 SHEETS STA. TO STA.

F.A. RTE. 1472	F.A.U. RTE.	SECTION 21-00135-00-RS	COUNTY COOK	TOTAL SHEETS 27	SHEET NO. 23
BD600-03 (BD-8)			CONTRACT NO. 61H70		
FED. ROAD DIST. NO. 1 ILLINOIS			FED. AID PROJECT Z3Q2(622)		

E.H.E. PROJECT NO. 1252100601

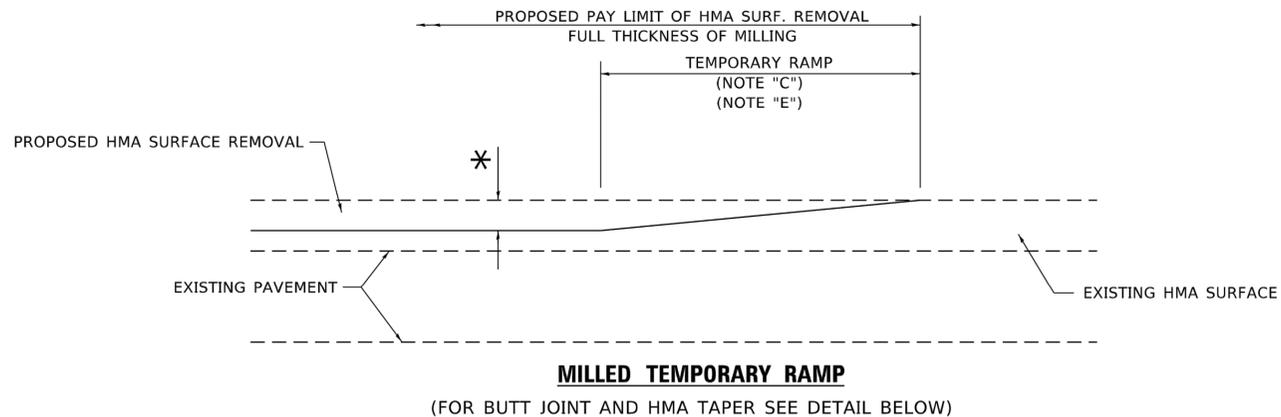


OPTION 1

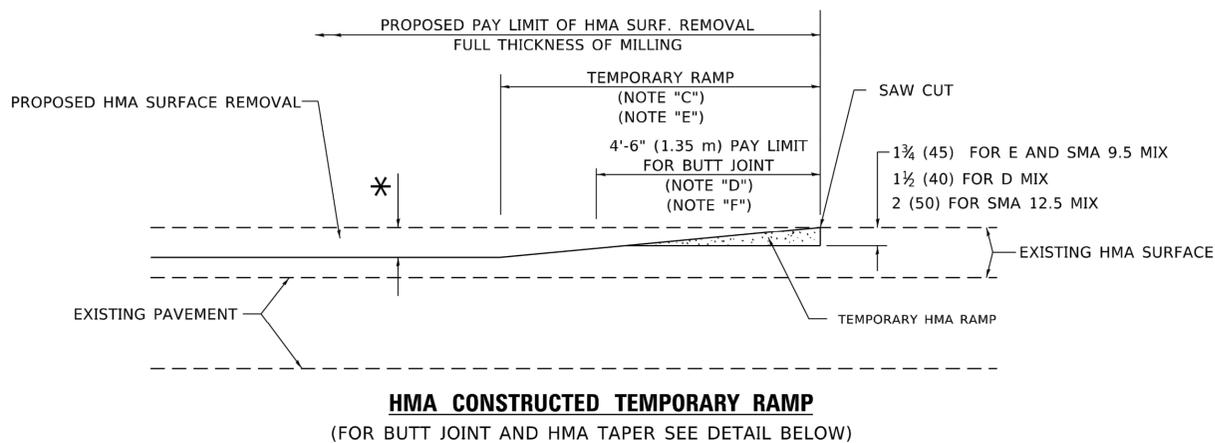


OPTION 2

TYPICAL TEMPORARY RAMP

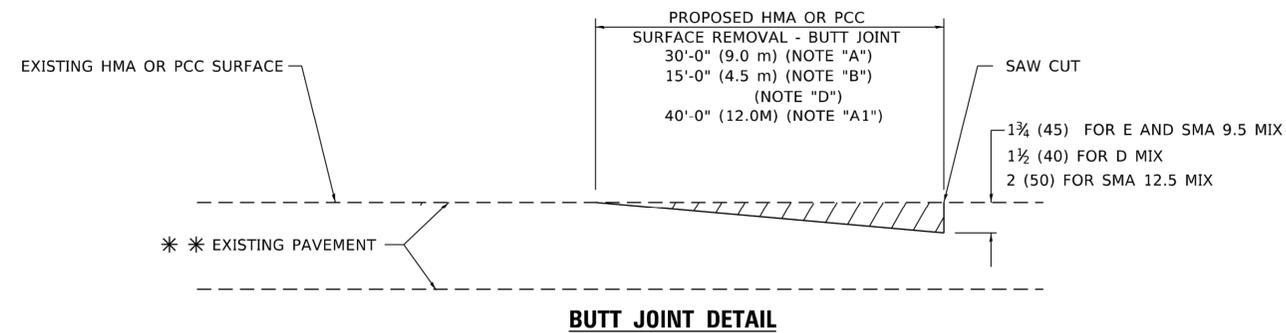

BUTT JOINT DETAIL

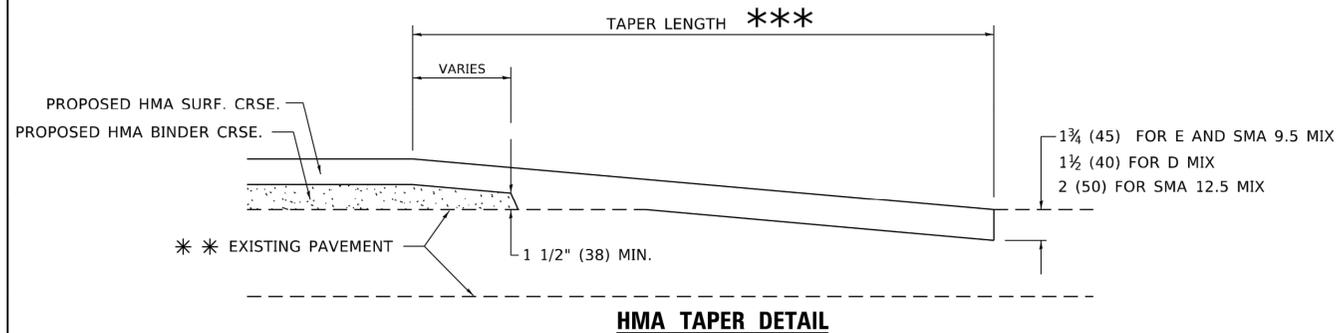

HMA TAPER DETAIL

TYPICAL BUTT JOINT AND HMA TAPER FOR RESURFACING ONLY

** PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.


GENERAL NOTES

- A. MAINLINE ARTERIAL ROADWAYS AND MAJOR SIDE ROADS.
- A1. INTERSTATES
- B. MINOR SIDE ROADS.
- C. THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
- D. THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
- E. TAPER THE TEMP. RAMP AT A RATE OF 3' - 4" (1.02m) PER 1 INCH (25 mm) OF MILLING THICKNESS.
 - * SEE TYPICAL SECTIONS FOR MILLING THICKNESS.
- F. SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".
 - *** 20'-0" (6.1 m) PER 1 (25) RESURFACING (NOTE "A")
 - 10'-0" (3.0 m) PER 1 (25) RESURFACING (NOTE "B")

BASIS OF PAYMENT

- 1. THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD (SQUARE METER) FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL- BUTT JOINT".
- 2. THE TEMPORARY RAMP AND SAW CUT SHALL BE INCLUDED IN THE UNIT COST FOR HMA OR PCC SURFACE REMOVAL-BUTT JOINT.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

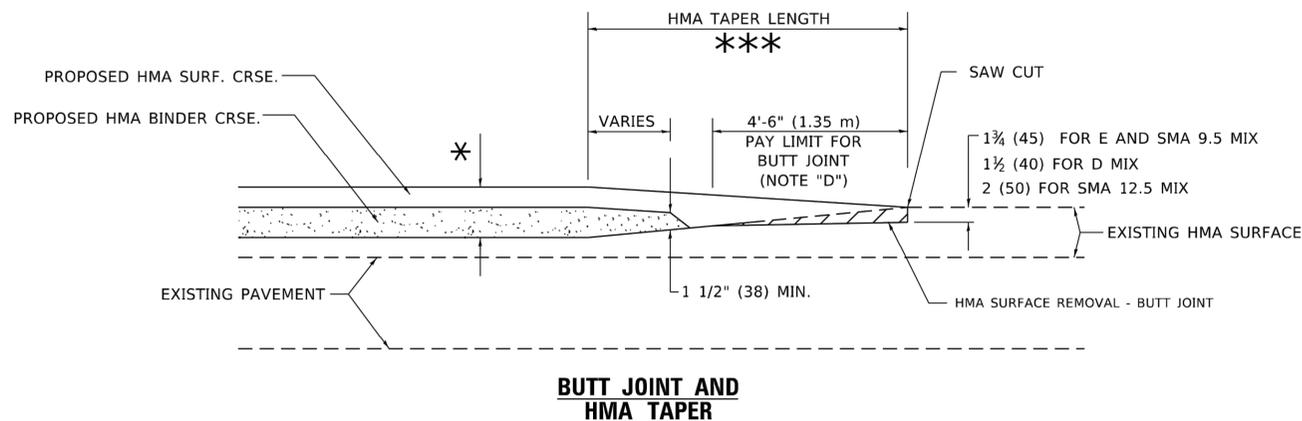

BUTT JOINT AND HMA TAPER

TYPICAL BUTT JOINT AND HMA TAPER FOR MILLING AND RESURFACING

USER NAME = demanchelt	DESIGNED - M. DE YONG	REVISED - A. ABBAS 03-21-97
	DRAWN -	REVISED - M. GOMEZ 04-06-01
PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED - R. BORO 01-01-07
PLOT DATE = 2/2/2022	DATE - 06-13-90	REVISED - K. SMITH 02-01-22

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


BUTT JOINT AND HMA TAPER DETAILS

SCALE: NONE SHEET 1 OF 1 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	24
BD400-05 BD32		CONTRACT NO. 61H70		
FED. ROAD DIST. NO. 1 ILLINOIS		FED. AID PROJECT Z3Q2(622)		

E.H.E. PROJECT NO. 1252100601

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave LAF0\DOT Standard.dwg Mar 07, 2022 - 11:03am

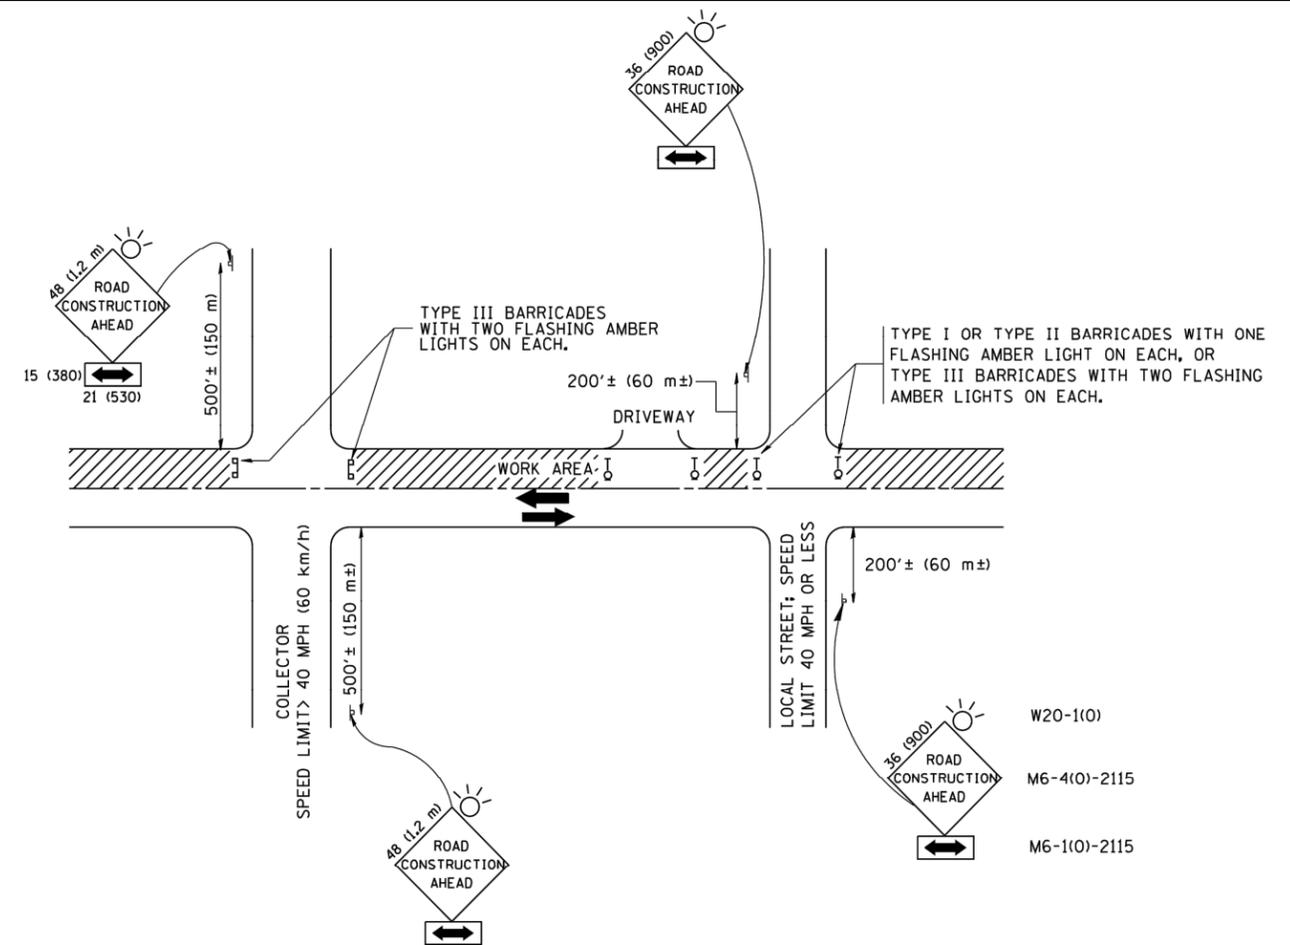

TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS

NOTES:

- A. FOR NO LANE RESTRICTION ON THE SIDE ROAD OR DRIVEWAYS
 1. SIDE ROAD WITH A SPEED LIMIT OF 40 MPH (60 km/h) OR LESS AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER:
 - a) ONE ROAD CONSTRUCTION AHEAD SIGN 36 x 36 (900x900) WITH A FLASHER AND FLAG MOUNTED ON IT APPROXIMATELY 200' (60 m) IN ADVANCE OF THE MAIN ROUTE.
 - b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE I, TYPE II OR TYPE III BARRICADES, 1/3 OF THE CROSS SECTION OF THE CLOSED PORTION.
 2. SIDE ROAD WITH A SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER:
 - a) ONE ROAD CONSTRUCTION AHEAD SIGN 48 x 48 (1.2 m x 1.2 m) WITH A FLASHER MOUNTED ON IT APPROXIMATELY 500' (150 m) IN ADVANCE OF THE MAIN ROUTE.
 - b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION.
 3. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (M6-1) SHALL BE USED IN LIEU OF THE DOUBLE HEADED ARROW (M6-4).
- B. FOR A LANE CLOSURE ON A SIDE ROAD OR DRIVEWAY:

USE APPLICABLE PORTIONS OF THE TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES (STD. 701501, STD. 701606 OR THE APPROPRIATE STANDARD). THE SPACING OF SIGNS AND BARRICADES SHALL BE ADJUSTED FOR FIELD CONDITIONS AS DIRECTED BY THE ENGINEER. THE DIRECTIONAL ARROW SHALL BE COVERED OR REMOVED WHEN NO LONGER CONSISTENT WITH THE SIDE ROAD LANE CLOSURE.
- C. ADVANCE WARNING SIGNS ARE TO BE OMITTED ON DRIVEWAY UNLESS OTHERWISE NOTED.
- D. THE TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS SHALL BE INCIDENTAL TO THE COST OF SPECIFIED TRAFFIC CONTROL STANDARDS OR ITEMS.

All dimensions are in millimeters (inches) unless otherwise shown.

FILE NAME = W:\diststd\22x34\tcl0.dgn	USER NAME = gaglianobt	DESIGNED - LHA	REVISED - J. OBERLE 10-18-95
		DRAWN -	REVISED - A. HOUSEH 03-06-96
	PLOT SCALE = 500.000 ' / IN.	CHECKED -	REVISED - A. HOUSEH 10-15-96
	PLOT DATE = 1/4/2008	DATE - 06-89	REVISED - T. RAMMACHER 01-06-00


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**TRAFFIC CONTROL AND PROTECTION FOR
SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS**


SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1472	21-00135-00-RS	COOK	27	25
TC10			CONTRACT NO. 61H70	
FED. ROAD DIST. NO. 1 ILLINOIS			FED. AID PROJECT Z3Q2(622)	


E.H.E. PROJECT NO. 1252100601

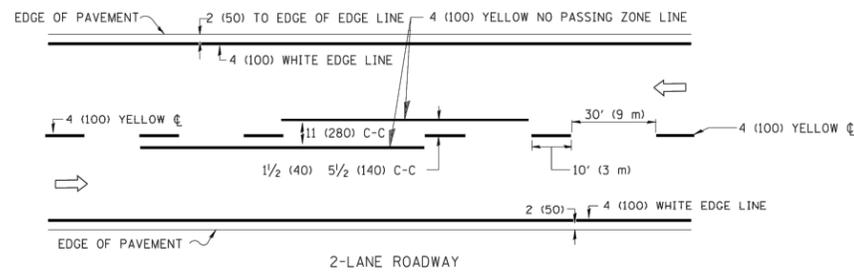

2-LANE ROADWAY

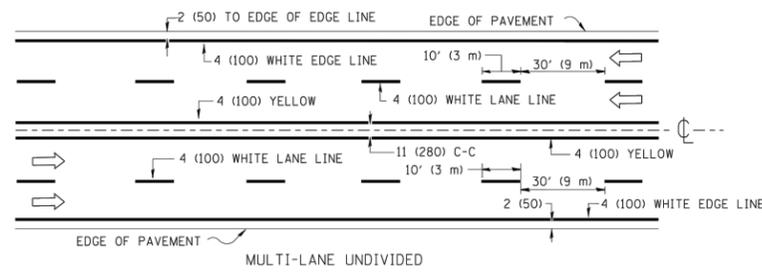



MULTI-LANE UNDIVIDED

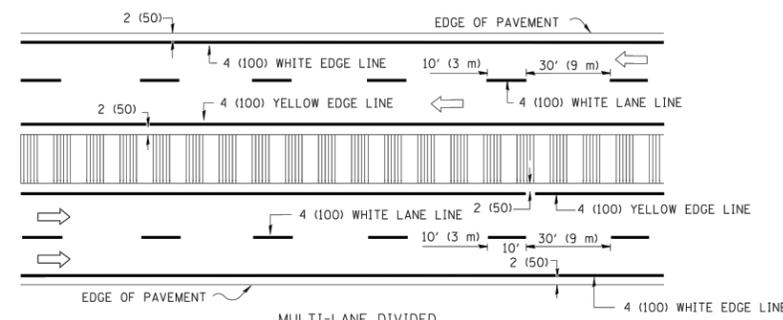


MULTI-LANE DIVIDED WITH MOUNTABLE MEDIAN

NOTE: MEDIANS WITH BARRIER CURB DO NOT REQUIRE AN EDGE LINE


TYPICAL LANE AND EDGE LINE MARKING

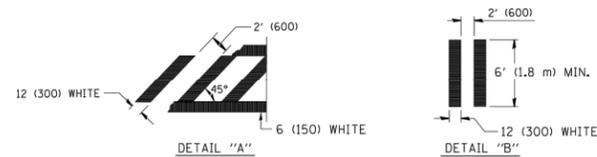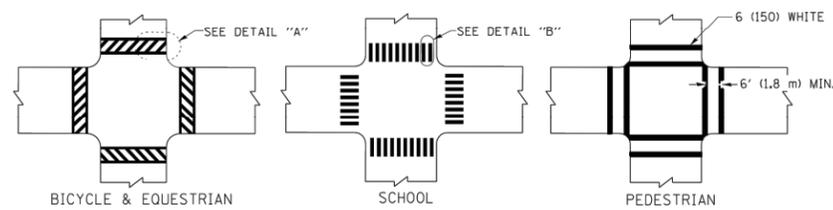

TYPICAL CROSSWALK MARKING

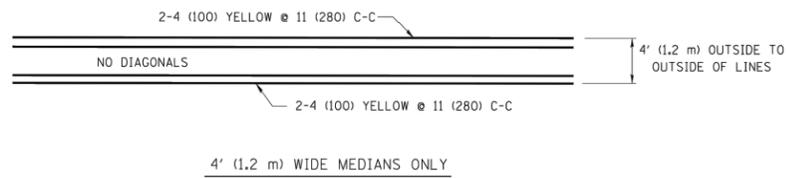


4' (1.2 m) WIDE MEDIANS ONLY

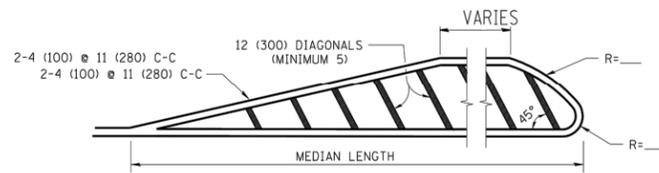


MEDIANS OVER 4' (1.2 m) WIDE

DIAGONAL LINE SPACING: 50' (15 m) C-C (LESS THAN 30MPH (50 km/h))
75' (25 m) C-C 30MPH (50 km/h) TO 45MPH (70 km/h)
150' (45 m) C-C (MORE THAN 45MPH (70 km/h))

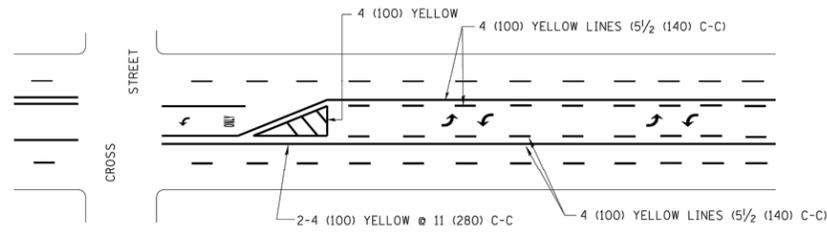


A MINIMUM OF TWO PAIRS OF TURN ARROWS SHALL BE USED, WHITE IN COLOR. ADDITIONAL PAIRS SHALL BE PLACED AT 200' (60 m) TO 300' (90 m) INTERVALS.



MEDIAN WITH TWO-WAY LEFT TURN LANE

TYPICAL PAINTED MEDIAN MARKING

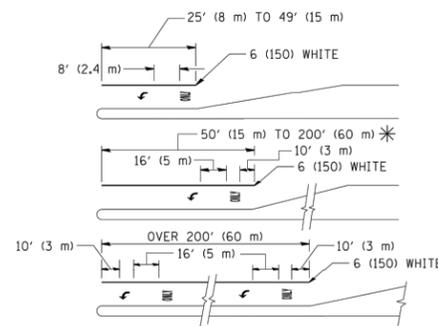


FULL SIZE LETTERS 8' (2.4 m) AND ARROWS SHALL BE USED.
AREA = 15.6 SQ. FT. (1.5 m²) ONLY AREA = 20.8 SQ. FT. (1.9 m²)


* TURN LANES IN EXCESS OF 400' (120 m) IN LENGTH MAY HAVE AN ADDITIONAL SET OF ARROW - "ONLY" INSTALLED MIDWAY BETWEEN THE OTHER TWO SETS OF ARROW - "ONLY".

TYPICAL LEFT (OR RIGHT) TURN LANE

TYPICAL TURN LANE MARKING

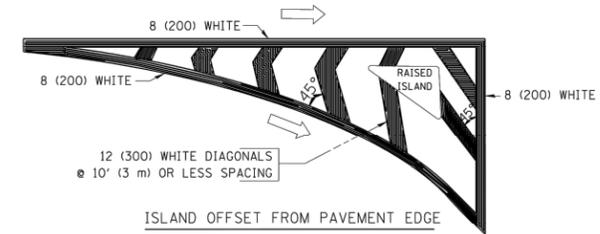

ISLAND OFFSET FROM PAVEMENT EDGE

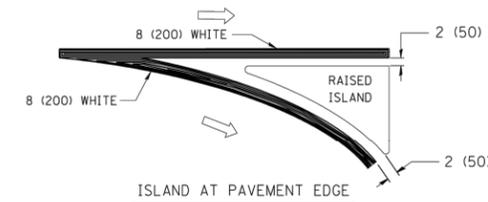

ISLAND AT PAVEMENT EDGE

TYPICAL ISLAND MARKING

TYPE OF MARKING	WIDTH OF LINE	PATTERN	COLOR	SPACING / REMARKS
CENTERLINE ON 2 LANE PAVEMENT	4 (100)	SKIP-DASH	YELLOW	10' (3 m) LINE WITH 30' (9 m) SPACE
CENTERLINE ON MULTI-LANE UNDIVIDED PAVEMENT	2 @ 4 (100)	SOLID	YELLOW	11 (280) C-C
NO PASSING ZONE LINES: FOR ONE DIRECTION FOR BOTH DIRECTIONS	4 (100) 2 @ 4 (100)	SOLID SOLID	YELLOW YELLOW	5 1/2 (140) C-C FROM SKIP-DASH CENTERLINE 11 (280) C-C OMIT SKIP-DASH CENTERLINE BETWEEN
LANE LINES	4 (100) 5 (125) ON FREEWAYS	SKIP-DASH SKIP-DASH	WHITE WHITE	10' (3 m) LINE WITH 30' (9 m) SPACE
DOTTED LINES (EXTENSIONS OF CENTER, LANE OR TURN LANE MARKINGS)	SAME AS LINE BEING EXTENDED	SKIP-DASH	SAME AS LINE BEING EXTENDED	2' (600) LINE WITH 6' (1.8 m) SPACE
EDGE LINES	4 (100)	SOLID	YELLOW-LEFT WHITE-RIGHT	OUTLINE MOUNTABLE MEDIANS IN YELLOW; EDGE LINES ARE NOT USED NEXT TO BARRIER CURB
TURN LANE MARKINGS	6 (150) LINE; FULL SIZE LETTERS & SYMBOLS (8' (2.4m))	SOLID	WHITE	SEE TYPICAL TURN LANE MARKING DETAIL
TWO WAY LEFT TURN MARKING	2 @ 4 (100) EACH DIRECTION 8' (2.4m) LEFT ARROW	SKIP-DASH AND SOLID IN PAIRS	YELLOW WHITE	10' (3 m) LINE WITH 30' (9 m) SPACE FOR SKIP-DASH; 5 1/2 (140) C-C BETWEEN SOLID LINE AND SKIP-DASH LINE SEE TYPICAL TWO-WAY LEFT TURN MARKING DETAIL
CROSSWALK LINES (PEDESTRIAN) A. DIAGONALS (BIKE & EQUESTRIAN) B. LONGITUDINAL BARS (SCHOOL)	2 @ 6 (150) 12 (300) @ 45° 12 (300) @ 90°	SOLID SOLID SOLID	WHITE WHITE WHITE	NOT LESS THAN 6' (1.8 m) APART 2' (600) APART 2' (600) APART SEE TYPICAL CROSSWALK MARKING DETAILS.
STOP LINES	24 (600)	SOLID	WHITE	PLACE 4' (1.2 m) IN ADVANCE OF AND PARALLEL TO CROSSWALK, IF PRESENT, OTHERWISE, PLACE AT DESIRED STOPPING POINT, PARALLEL TO CROSSROAD CENTERLINE, WHERE POSSIBLE
PAINTED MEDIANS	2 @ 4 (100) WITH 12 (300) DIAGONALS @ 45° NO DIAGONALS USED FOR 4' (1.2 m) WIDE MEDIANS	SOLID	YELLOW: TWO WAY TRAFFIC WHITE: ONE WAY TRAFFIC	11 (280) C-C FOR THE DOUBLE LINE SEE TYPICAL PAINTED MEDIAN MARKING.
GORE MARKING AND CHANNELIZING LINES	8 (200) WITH 12 (300) DIAGONALS @ 45°	SOLID	WHITE	DIAGONALS: 15' (4.5 m) C-C (LESS THAN 30MPH (50 km/h)) 20' (6 m) C-C 30MPH (50 km/h) TO 45MPH (70 km/h) 30' (9 m) C-C (OVER 45MPH (70 km/h))
RAILROAD CROSSING	24 (600) TRANSVERSE LINES; "RR" IS 6' (1.8 m) LETTERS; 16 (400) LINE FOR "X"	SOLID	WHITE	SEE STATE STANDARD 780001 AREA OF: "R"=3.6 SQ. FT. (0.33 m ²) EACH "X"=54.0 SQ. FT. (5.0 m ²)
SHOULDER DIAGONALS	12 (300) @ 45°	SOLID	WHITE - RIGHT YELLOW - LEFT	50' (15 m) C-C (LESS THAN 30MPH (50 km/h)) 75' (25 m) C-C (30 MPH (50 km/h) TO 45MPH (70 km/h)) 150' (45 m) C-C (OVER 45MPH (70 km/h))

FOR FURTHER DETAILS ON PAVEMENT MARKING REFER TO STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND STATE STANDARD 780001.

All dimensions are in inches (millimeters) unless otherwise shown.


FILE NAME =	USER NAME = drvakosgn	DESIGNED - EVERS	REVISED - T. RAMMACHER 10-27-94
cs:\pwork\pwork\drvakosgn\d0108315\td3.dgn		DRAWN -	REVISED - C. JUCIUS 09-09-09
		CHECKED -	REVISED -
		DATE - 03-19-90	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DISTRICT ONE
TYPICAL PAVEMENT MARKINGS

SCALE: NONE	SHEET NO. 1 OF 1 SHEETS	STA. TO STA.	F.A.U. RTE. 1472	SECTION 21-00135-00-RS	COUNTY COOK	TOTAL SHEETS 27	SHEET NO. 26
			TC-13		CONTRACT NO. 61H70		
			FED. ROAD DIST. NO. 1 ILLINOIS		FED. AID PROJECT Z3Q2(622)		

Drawing file: W:\Projects_by_Village\Brookfield\12521006 - Washington Ave LAF0\DOT Standard.dwg Mar 07, 2022 - 11:03am

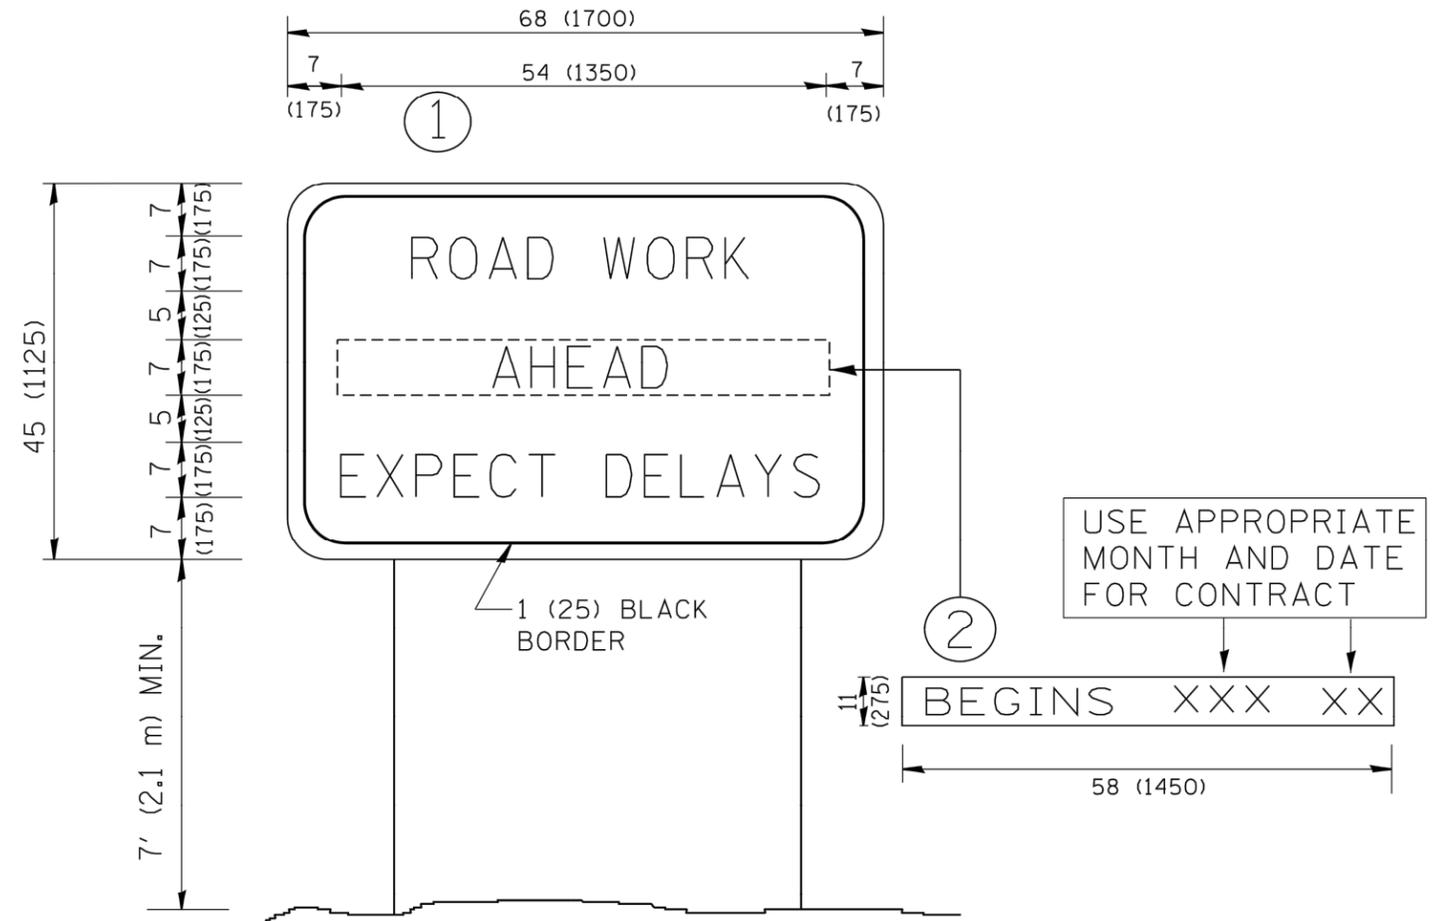

NOTES:

1. USE BLACK LETTERING ON ORANGE BACKGROUND.
2. ERECT SIGNS IN ADVANCE OF THE LOCATION FOR THE "ROAD CONSTRUCTION AHEAD" SIGN AT LOCATIONS AS DIRECTED BY THE ENGINEER.
3. ERECT SIGN ① WITH INSTALLED PANEL ② ONE WEEK PRIOR TO THE START OF CONSTRUCTION.
4. REMOVE PANEL ② SOON AFTER THE START OF CONSTRUCTION.
5. SEE SPECIAL PROVISION FOR "TEMPORARY INFORMATION SIGNING" FOR ADDITIONAL INFORMATION.
6. ONE SIGN ASSEMBLY EQUALS 25.70 SQ. FT. (2.3 SQ. M.)
7. SHALL BE PAID FOR AS TEMPORARY INFORMATION SIGNING.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

FILE NAME = W:\diststd\22x34\tc22.dgn	USER NAME = gaglianobt	DESIGNED - DRAWN -	REVISED - REVISED -
PLOT SCALE = 50.000' / IN.	CHECKED -	REVISED - T. RAMMACHER 02-02-99	REVISED - R. MIRS 09-15-97
PLOT DATE = 1/4/2008	DATE -	REVISED - C. JUCIUS 01-31-07	REVISED - R. MIRS 12-11-97

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

ARTERIAL ROAD INFORMATION SIGN	
SCALE: NONE	SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A.U. RTE. 1472	SECTION 21-00135-00-RS	COUNTY COOK	TOTAL SHEETS 27	SHEET NO. 27
TC-22		CONTRACT NO. 61H70		
FED. ROAD DIST. NO. 1 ILLINOIS		FED. AID PROJECT Z3Q2(622)		

E.H.E. PROJECT NO. 1252100601